


SMT Power Inductors

High Current Composite Inductor - PA2248XXXNLT and PM2248.XXXNLT

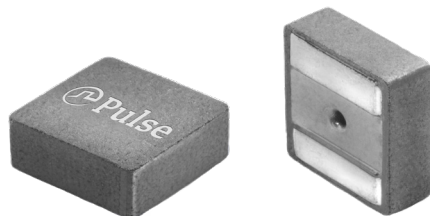

- Ⓟ **Height:** 13.0mm Max
- Ⓟ **Footprint:** 16.8mm x 15.8mm Max
- Ⓟ **Current Rating:** up to 31Arms
- Ⓟ **Inductance Range:** 4.7uH to 33uH
- Ⓟ High current, low DCR, and high efficiency
- Ⓟ High reliability
- Ⓟ Minimized acoustic noise and minimized leakage flux noise
- Ⓟ Available in Commercial (PA2248) and Automotive (PM2248) grades

Electrical Specifications @ 25°C, Operating Temperature Range -55°C to +155°C


| Part Number | | Inductance 100KHz, 0.1V uH±20% | Rated ⁵ Current A | DC Resistance | | Saturation Current ² (25°C) A | K Factor for Core Loss |
|---------------|-------------------------|--|--|---------------|-------|--|------------------------------|
| Commerical | Automotive ⁶ | | | TYP. | MAX. | | |
| | | | | mΩ | mΩ | | |
| PA2248.472NLT | PM2248.472NLT | 4.7 | 31.0 | 3.0 | 3.3 | 40.0 | 10.9 |
| PA2248.562NLT | PM2248.562NLT | 5.6 | 29.0 | 3.5 | 3.9 | 35.0 | 9.6 |
| PA2248.682NLT | PM2248.682NLT | 6.8 | 27.0 | 3.8 | 4.2 | 32.0 | 8.6 |
| PA2248.822NLT | PM2248.822NLT | 8.2 | 26.0 | 5.1 | 5.7 | 29.0 | 7.8 |
| PA2248.103NLT | PM2248.103NLT | 10.0 | 25.0 | 6.3 | 7.0 | 27.0 | 7.2 |
| PA2248.153NLT | PM2248.153NLT | 15.0 | 22.0 | 6.8 | 7.5 | 21.0 | 5.7 |
| PA2248.223NLT | PM2248.223NLT | 22.0 | 17.0 | 12.6 | 13.86 | 19.0 | 4.7 |
| PA2248.333NLT | PM2248.333NLT | 33.0 | 14.0 | 18.5 | 22.2 | 16.0 | 3.7 |

Notes:


- Actual temperature of the component during system operation (ambient plus temperature rise) must be within the standard operating range.
- The saturation current is the current at which the initial inductance is guaranteed to drop by no more than 40%. The typical inductance at a specified current can be found on the typical performance curves.
- The rated current is the DC current required to raise the component temperature by approximately 40 °C. Take note that the components' performance varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.
- The part temperature (ambient+temp rise) should not exceed the upper operating temperature range under worst case operating conditions. Circuit design, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- The PMxxxx.XXXNLT part numbers are AEC-Q200 and IATF16949 certified. The inductance and mechanical dimensions are 100% tested in production but do not necessarily meet a product capability index (Cpk) >1.33 and therefore may not strictly conform to PPAP.
- Special Characteristics Ⓟ

Mechanical

PA2248.XXXNLT and PM2248.XXXNLT

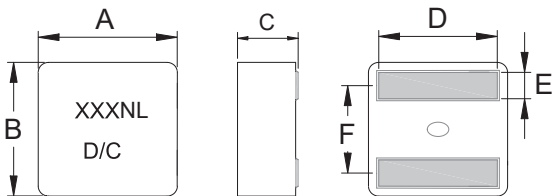

FINAL LAYOUT

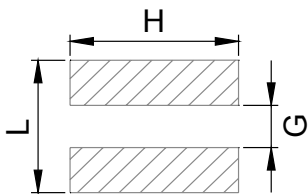


SUGGESTED PAD LAYOUT

| Series | A | B | C | D | E | F | L | G | H |
|---------------|----------|----------|----------|----------|---------|----------|------------|----------|-----------|
| PA2248/PM2248 | 16.5±0.3 | 15.5±0.3 | 12.7±0.3 | 13.2±0.5 | 3.2±0.2 | 10.4±0.3 | 15.0 (REF) | 6.0(REF) | 15.0(REF) |

All Dimensions in mm.


TAPE & REEL INFO

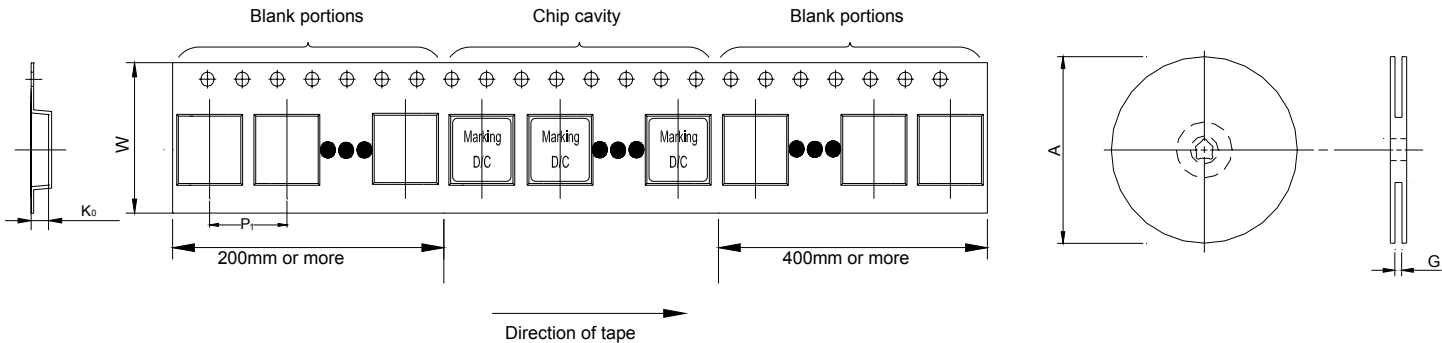


| SURFACE MOUNTING TYPE, REEL/TAPE LIST | | | | | | |
|---------------------------------------|----------------|------|----------------|----|----------------|----------|
| | REEL SIZE (mm) | | TAPE SIZE (mm) | | | QTY |
| | A | G | P ₁ | W | K ₀ | PCS/REEL |
| PA2248/PM2248 | Ø330 | 32.4 | 24 | 32 | 13.6 | 100 |

Typical Performance Curves


472NLT

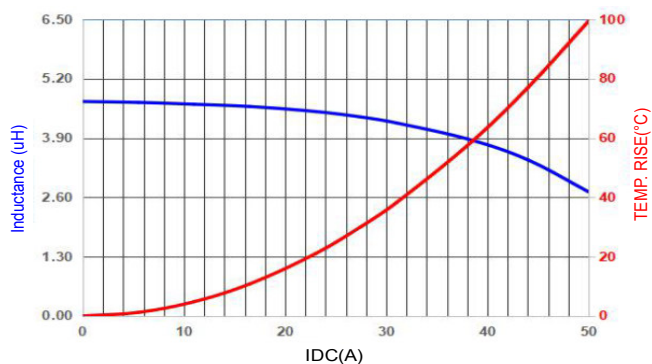


562NLT

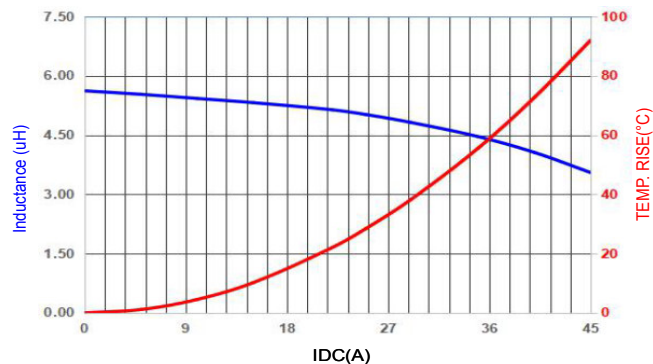


682NLT

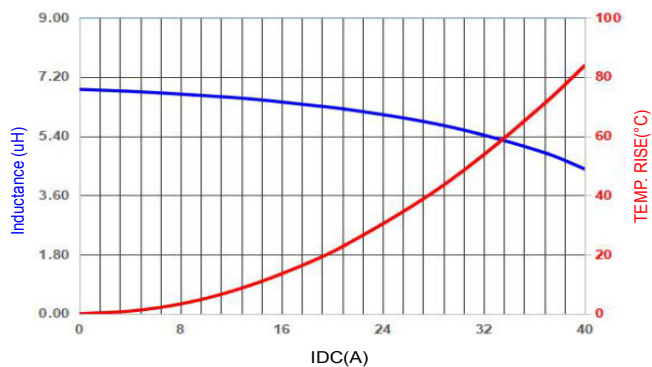


822NLT

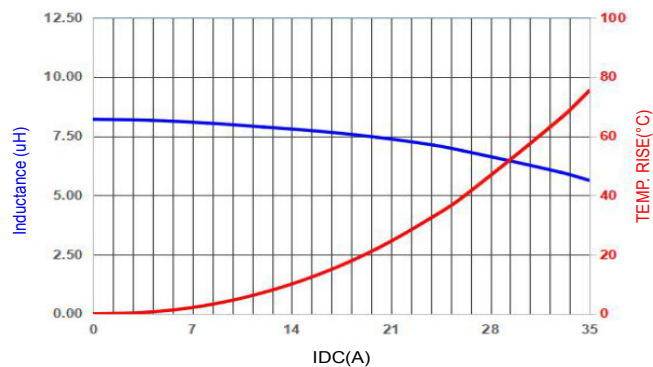

103NLT


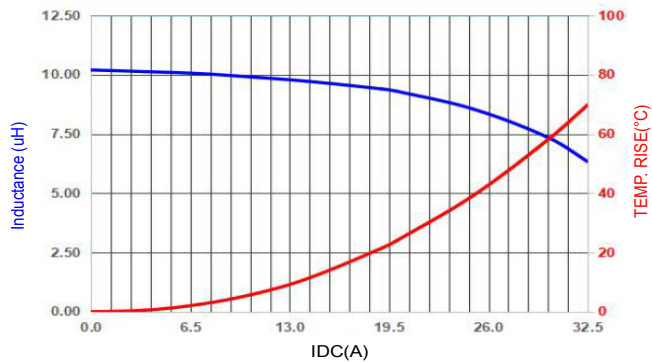


153NLT

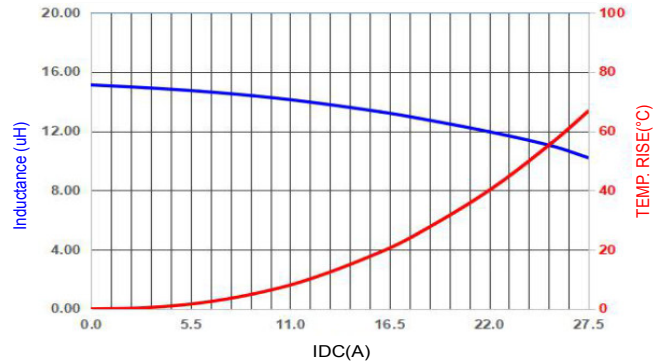


SMT Power Inductors

High Current Composite Inductor - PA2248XXXNLT and PM2248.XXXNLT

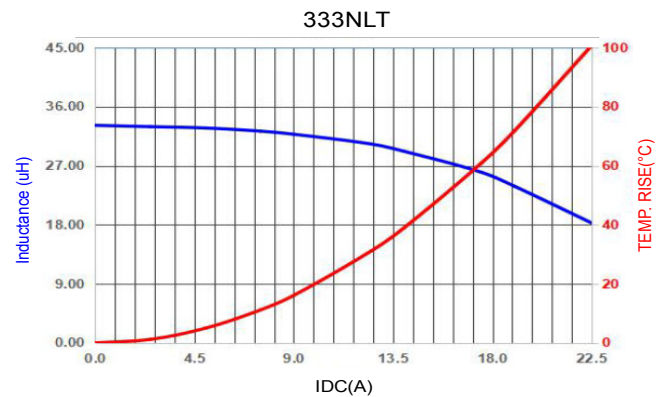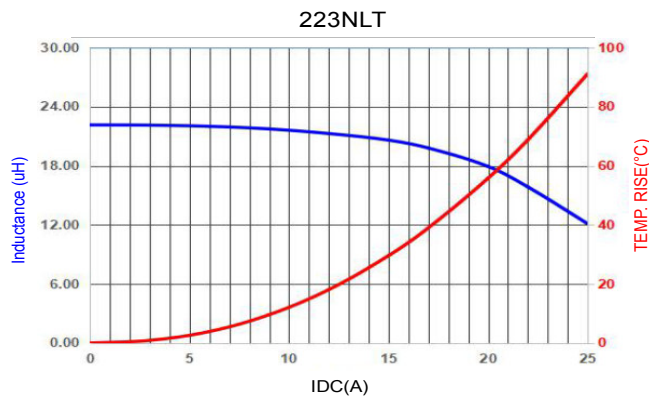

CORE LOSS vs FLUX DENSITY

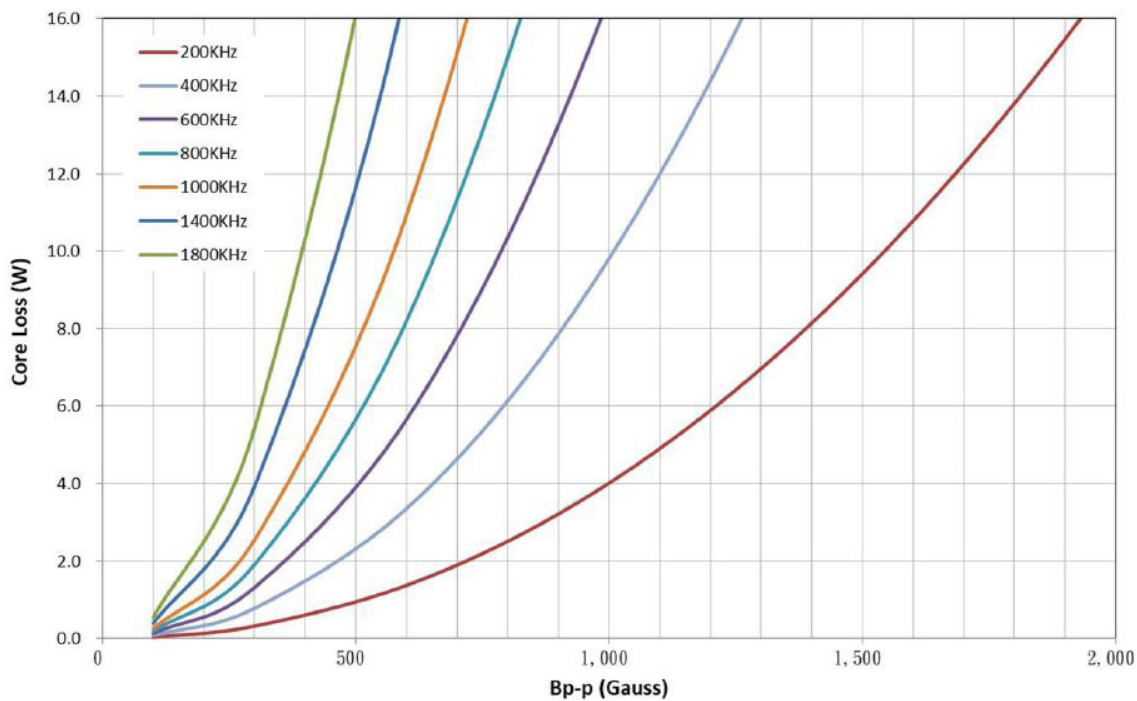

$$Bp-p = K * L(uH) * \Delta I(A)$$

For More Information:

Americas - proinfo_power@pulseelectronics.com | Europe - power-apps-europe@pulseelectronics.com | Asia - power-apps-asia@pulseelectronics.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[PM2248.153NLT](#) [PA2248.153NLT](#)