

TECHNICAL DATA SHEET **Description**: Multiband Swivel Dipole 617-3900MHz **PART NUMBER: SPDA24617/3900**

Series: Omni Antenna


Features:

- 617-960 MHz
- 1400-2700 MHz
- 3200-3900 MHz
- Omni pattern in H-plane
- Gain 1 / 2.5 / 3 dBi
- Power rating 5W
- **IP65**

RoHS Compliant

Applications:

- · LTE Routers / Gateways
- 4G / 5G LTE
 - 617-960/1400-2170/2300-2700/3200-3900MHz
 - Includes New Band 71 (617-698 MHz) and CBRS Bands 42 and 48 (3.4-3.7 GHz)



Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information: Pulse Worldwide Headquarters

15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100

Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551

Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998









Description:

Multiband Swivel Dipole 617-3900MHz

Series: Omni Antenna

PART NUMBER: SPDA24617/3900

ELECTRICAL SPECIFICATIONS

Frequency	617-960/1400-2700/3200-3900 MHz
Nominal Impedance	50 Ω
VSWR	3:1(Max)
Radiation Pattern	Omni
Peaking Gain (typical)	1dBi @617-960MHz
Peaking Gain (typical)	2.5 dBi @1400-2700MHz
Peaking Gain (typical)	3 dBi @ 3200-3900MHz
Efficiency (typical)	45% @617-960MHz
Efficiency (typical)	70% @1400-2700MHz
Efficiency (typical)	70% @ 3200-3900MHz
Polarization	Linear-Vertical
Power Withstanding	5W

MECHANICAL SPECIFICATIONS

Plastic radome	ABS/PC
Color	Black
Connector Type	SMA-M
Flammability	UL94-V0
Ingress Protection	IP65
Weight	56.8 g
Overall Length	228.84[9.01] mm [INCHES]
Position	0°, 45° & 90°

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

2



Description:

Multiband Swivel Dipole 617-3900MHz

Series: Omni Antenna

PART NUMBER: SPDA24617/3900

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-40/+85 ° C
Non-operating temperature range	-40/+85 ° C
Temperature Shock	3 CYCLES, -25°C TO +70°C AT 5° PER MIN
Humidity	
Cyclic	Mil-Std-810 Method 507.3, Procedure III 5 cycles @ 95% RH
Vibration	
Random	5-500 Hz FREQ, MIL STD 810 G section 514.4
Mechanical Shocks	4.78 m/s
Drop test	1 meter, 10 times to tile
RoHS Compliant	Yes

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



3




Description:

Multiband Swivel Dipole 617-3900MHz

Series: Omni Antenna

PART NUMBER: SPDA24617/3900

MECHANICAL DRAWING

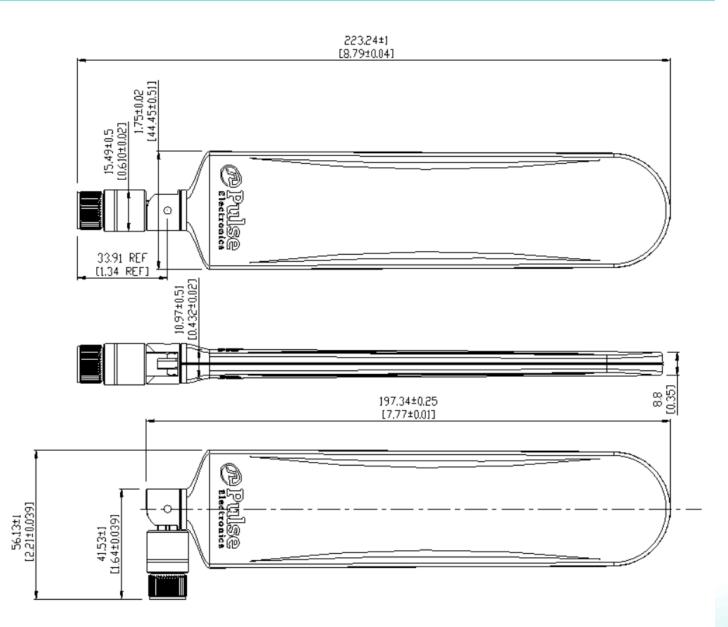

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



4



Description:

Multiband Swivel Dipole 617-3900MHz

Series: Omni Antenna

PART NUMBER: SPDA24617/3900

TEST SETUP

Setup1: straight



Setup2: bending-90°



Note: All is test in free space. And the Radiation Pattern 2D is only test in setup1-straight.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



5



Description:


Multiband Swivel Dipole 617-3900MHz

Series: Omni Antenna

PART NUMBER: SPDA24617/3900

CHARTS

Voltage Standing-Wave Ratio

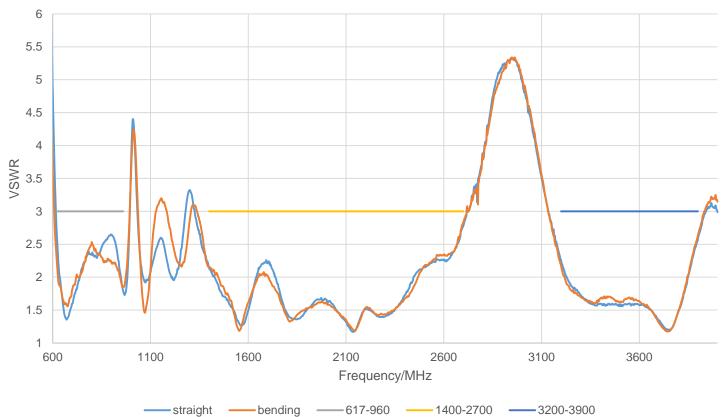

SPDA24617-3900

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



6



Description:


Multiband Swivel Dipole 617-3900MHz

Series: Omni Antenna

PART NUMBER: SPDA24617/3900


CHARTS

Peaking Gain

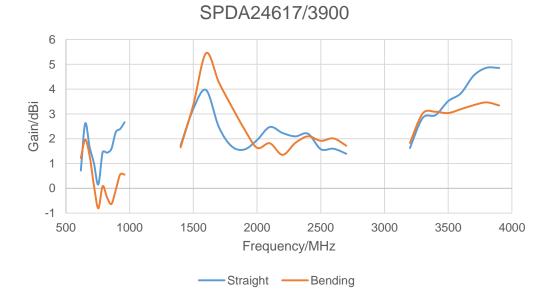

Radiation Efficiency

SPDA24617/3900

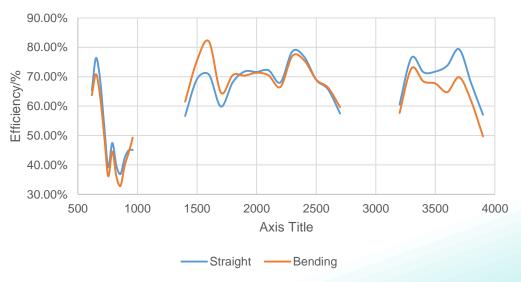

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



7



Description:


Multiband Swivel Dipole 617-3900MHz


Series: Omni Antenna


PART NUMBER: SPDA24617/3900

CHARTS

Radiation Pattern 2D(617-960MHz)

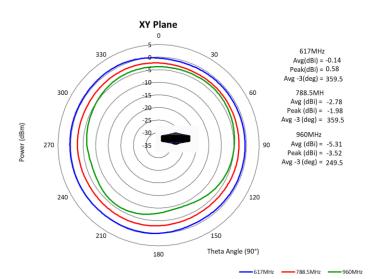

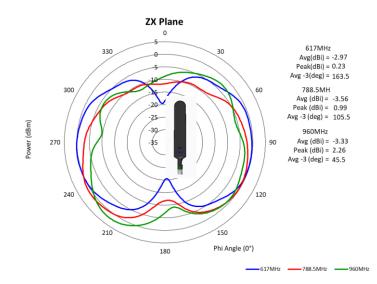

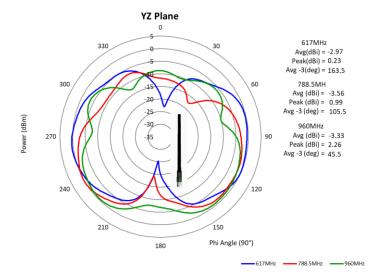

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



8



Description:


Multiband Swivel Dipole 617-3900MHz


Series: Omni Antenna

PART NUMBER: SPDA24617/3900

CHARTS

Radiation Pattern 2D(1400-2700MHz)

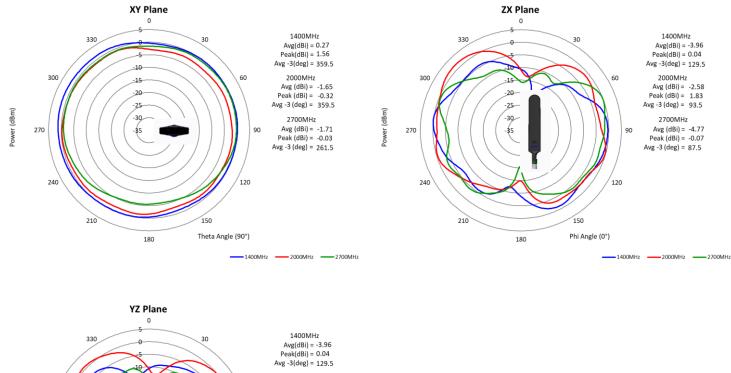

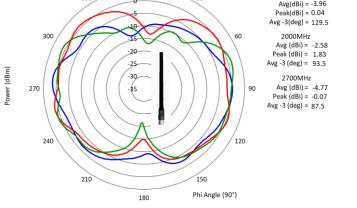

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



9



Description:


Multiband Swivel Dipole 617-3900MHz


Series: Omni Antenna

PART NUMBER: SPDA24617/3900

CHARTS

Radiation Pattern 2D(3200-3900MHz)

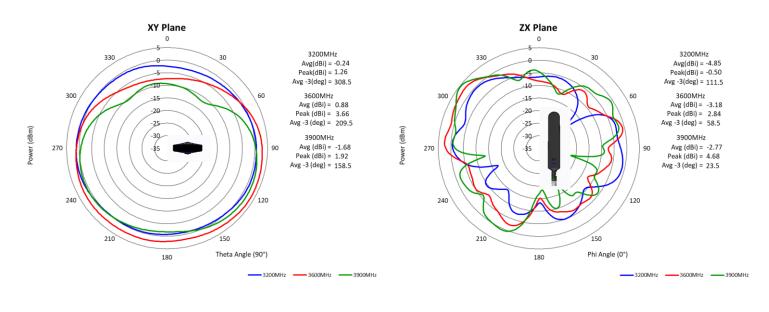

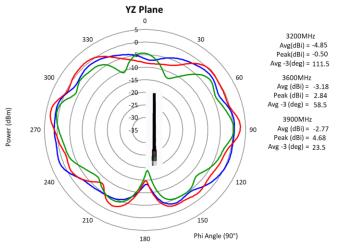

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description:

Multiband Swivel Dipole 617-3900MHz

Series: Omni Antenna

PART NUMBER: SPDA24617/3900

PACKAGING

1 PCS/PE bag 100 PCS/Carton box

Issue: 1850

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: SPDA24617/3900