
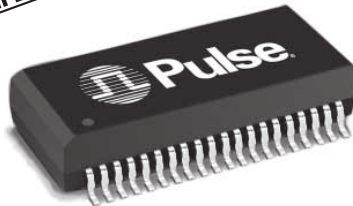


T1/E1/CEPT/ISDN-PRI TRANSFORMER

Quad Port SMT Transformer/Choke Modules,
1500 Vrms, Extended Temperature Range

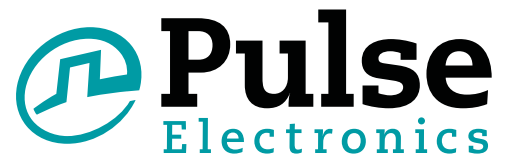

- RoHS peak reflow temperature rating: 245°C
- Optimized for enhanced EMC performance
- Quad-port SMT package contains Transformers with optional Common Mode Chokes on both transmit and receive channels
- Extended temperature range
- Isolation Voltage: 1500 Vrms

Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C


RoHS Compliant Part Number		Turns Ratio (Pri:Sec ±2%)		Line Side OCL (mH MIN)	Cw/w (pF MAX)	Primary Pins	
w/CMC	wo/CMC	TX	RX			TX	RX
TX1263NL	TX1262NL	1:2	1:2	1.2	35	1-2, 6-7, 11-12, 16-17	3-4, 8-9, 13-14, 18-19
TX1267NL	TX1266NL	1:2	1:1	1.2	35	1-3, 6-8, 11-13, 16-18	4-5, 9-10, 14-15, 19-20

- NOTES:**
- Other Transformer/Choke modules available. Please contact Pulse Applications Engineering. Please refer to data sheet T622 for a list of additional Octal Transformers without Common Mode Chokes.
 - RoHS compliant parts have an "NL" suffix at the end of the part number, TX1267NL.
 - To order Tape & Reel packaging add a "T" suffix to the part number (i.e. TX1263NL becomes TX1263NLT).

Mechanical

Schematic





TX1263NL / 1267NL

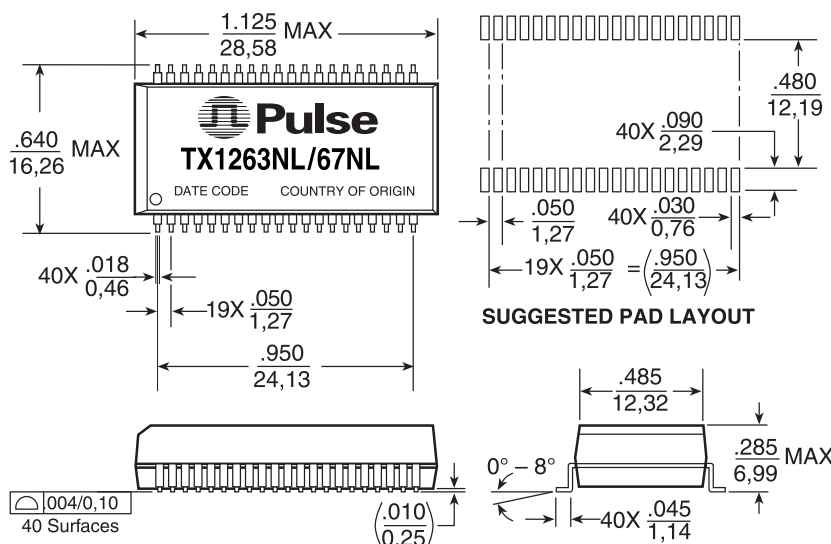





Weight.....5.0 grams
Tape & Reel..... 250/reel
Tube..... 15/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

TX1263NL




TX1267NL



T1/E1/CEPT/ISDN-PRI TRANSFORMER


Quad Port SMT Transformer/Choke Modules, 1500 Vrms, Extended Temperature Range

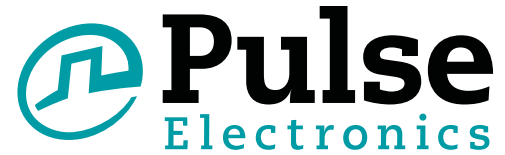

Mechanical

Schematics


TX1262NL, TX1266NL

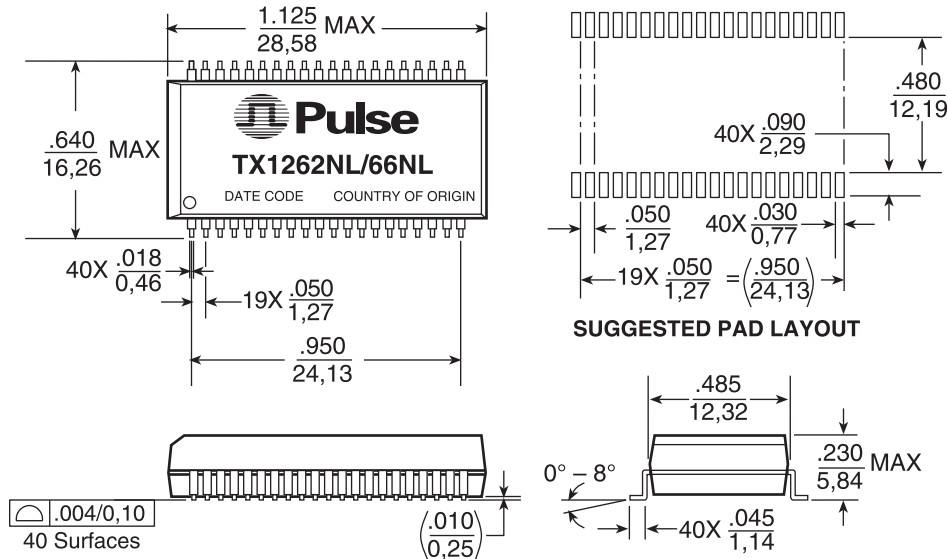


Weight.....4.0 grams
Tape & Reel..... 250/reel
Tube15/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

TX1262NL

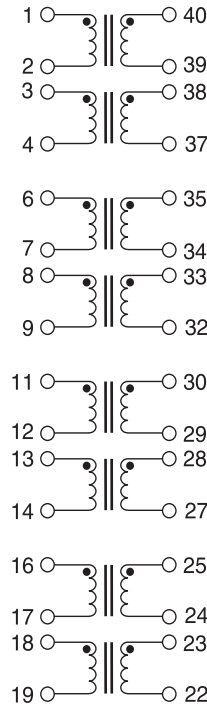

TX1266NL

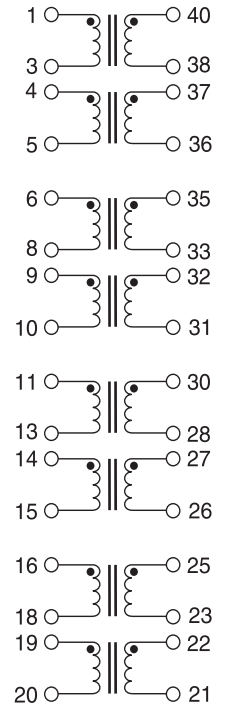

For More Information:

Pulse North American Headquarters
12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

TEL: 858 674 8100
FAX: 858 674 8262

Pulse European Headquarters
Einsteinstrasse 1
D-71083 Herrenberg
Germany

TEL: 49 7032 7806 0
FAX: 49 7032 7806 12

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

TEL: 86 755 33966678
FAX: 86 755 33966700

Pulse North China
Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

TEL: 86 21 32181071
FAX: 86 21 32181396

Pulse South Asia
150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324

TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia
No. 26
Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
32667

TEL: 886 3 4643715
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. Pulse and the Squarewave logo are trademarks of Pulse Electronics Corporation, registered in the U.S. and other countries. © Copyright, 2011. Pulse Electronics Corporation. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[TX1263NL](#) [TX1267NL](#) [TX1267NLT](#) [TX1263NLT](#)