

Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX



Features:

- · Small form factor
- PCB size W x L x H (with adhesive): 40 [1.57] x 15 [0.59] x 0.7[0.028]mm [inch]
- Lead free materials
- · RoHS Compliant Product
- · Mounting with adhesive tape
- Various cable lengths available
- · Connector options:
- Hirose connector U.FL-series (I.PEX connector MHF-series compatible)
- MMCX right angle jack (male)
- · Sunridge MCD series connector

Applications:

- Penta band EU/US GSM/WCDMA
- Frequency range: 850 / 900 / 1800 / 1900/ 2100 MHz
- 824-960MHz/1710-2170MHz

All dimensions are in mm / inches

Issue: 1819

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed


Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

This document covers all product variants of the following product family:

P/N	Cable length (mm/inch)	Connector	P/N	Cable length (mm/inch)	Connector
W3538B0045	45/1.77	U.FL	W3538E0300	300/11.81	MMCX
W3538B0075	75/2.95	U.FL	W3538T0150	150/5.91	MCD
W3538B0085	85/3.35	U.FL	W3538T0200	200/7.87	MCD
W3538B0100	100/3.94	U.FL	W3538T0300	300/11.81	MCD
W3538B0150	150/5.91	U.FL	W3538M0085	85/3.35	Murata
W3538B0200	200/7.87	U.FL	W3538M0150	150/5.91	Murata
W3538B0300	300/11.81	U.FL	W3538M0200	200/7.87	Murata
W3538E0075	75/2.95	MMCX	W3538M0300	300/11.81	Murata
W3538E0150	150/5.91	MMCX	W3538G0500	500/19.69	SMA
W3538E0200	200/7.87	MMCX	W3538A0200	200/7.87	N/A

Issue: 1819

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION







Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

ELECTRICAL SPECIFICATIONS

Typical free space performance, measured in test unit mechanics(position 1).

Cable Length (mm)	P/N	Frequency Range(MHz)	Max Gain (dBi)	Efficiency (%)	Return Loss min. (dB)
45	W3538B0045	824 - 960	0.78	44	-3
		1710 - 1990	1.73	49	-5
		1920 - 2170	1.84	50	-5
75	W3538B0075 W3538E0075	824 - 960	-1.64	30	-3
		1710 - 1990	2.26	53	-6
		1920 - 2170	2.37	55	-6
85	W3538B0085 W3538M0085	824 - 960	-2.38	25	-3
		1710 - 1990	2.3	57	-6
		1920 - 2170	1.96	58	-6
100	W3538B0100	824 - 960	-1.77	14	-3
		1710 - 1990	2.55	40	-6
		1920 - 2170	2.89	47	-6

Issue: Issue: 1819

ROHS



Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

ELECTRICAL SPECIFICATIONS

Cable Length (mm)	P/N	Frequency Range(MHz)	Max Gain (dBi)	Efficiency (%)	Return Loss min. (dB)
150	W3538B0150 W3538E0150 W3538T0150 W3538M0150	824 - 960	-1.05	37	-3
		1710 - 1990	2.27	47	-6
		1920 - 2170	2.04	53	-6
200	W3538B0200 W3538E0200 W3538T0200 W3538M0200 W3538A0200	824 - 960	0.53	40	-6
		1710 - 1990	4.18	56	-6
		1920 - 2170	4.06	57	-6
300	W3538B0300 W3538E0300 W3538T0300 W3538M0300	824 - 960	2.40	42	-6
		1710 - 1990	3.21	45	-6
		1920 - 2170	2.68	44	-6
500	W3538G0500	824 - 960	1.61	30	-5
		1710 - 1990	3.10	47	-6
		1920 - 2170	2.78	44	-6

Issue: Issue: 1819

ROHS



Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX


MECHANICAL SPECIFICATIONS

PCB size 40 [1.57] x 15 [0.59] x 0.7[0.028](with adhesive) mm[inch]

Connector type Optional
Cable type Optional
Cable length Optional

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -40/+85 ° C
Storage Temperature -40/+85 ° C
RoHS Compliant Yes







Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXXX

OTHER SPECIFICATIONS

Cable and Connector Configuration


Antenna feed cable:


- 1.13mm OD with Hirose connector (U.FL series, MHF compatible)
- 1.13mm OD with MMCX right angle jack (male)
- 0.81mm OD with Murata GSC connector
- 0.81mm OD with Sunridge MCD connector
- 1.13mm OD with SMA male connector


Hirose U.FL connector

MMCX right angle jack (male)

SMA male connector









Murata GSC connector

Sunridge MCD connector










Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

MECHANICAL DRAWING

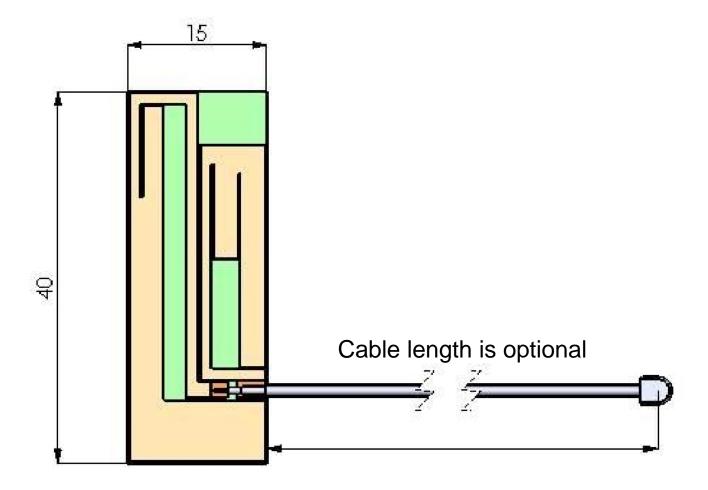

Dimension unit is mm





Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed


Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

TEST SETUP


Test Unit and Antenna Mounting Options

Test unit is illustrative and antenna does not need effective ground plane

Position 1. Antenna could be mounted at same plane and level as device board or a different level also



Position 2. Antenna could be mounted on upright position at bottom end of device

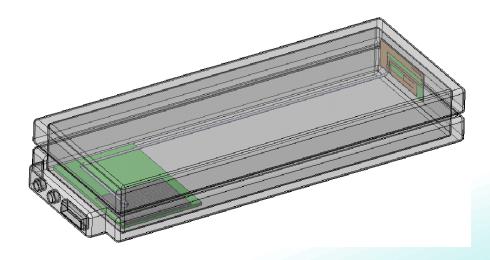






Description: 824-960/1710-2170MHz 2G/3G


Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

TEST SETUP

Position 3. Antenna could be mounted on upright position at long edge of device

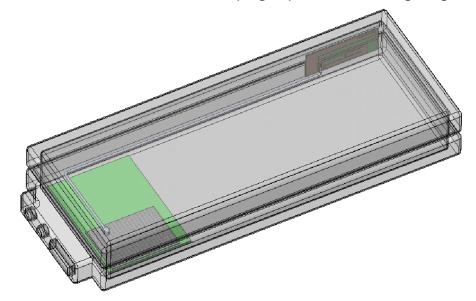







Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

CHARTS

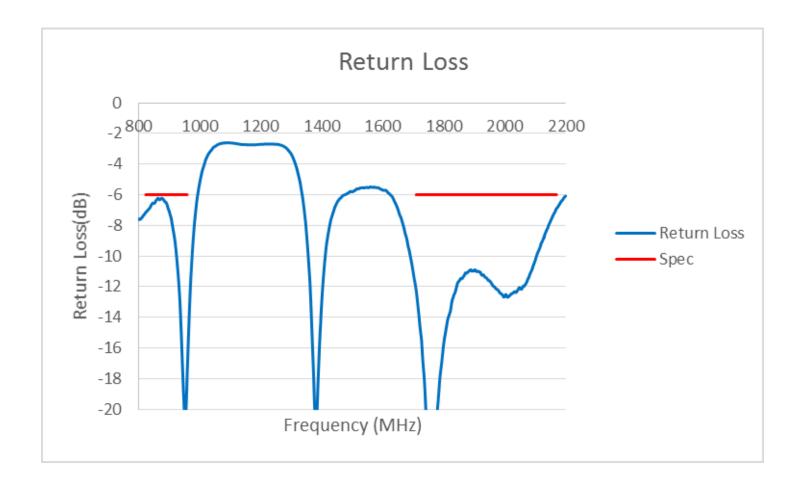









Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXXX

CHARTS

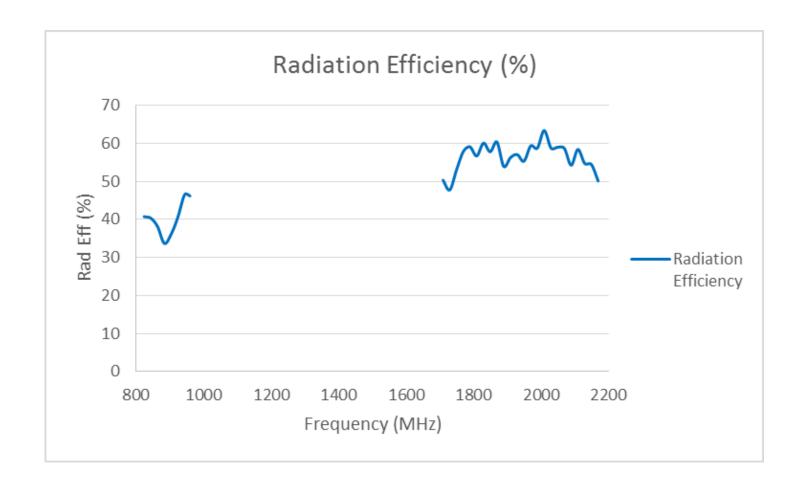








Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

CHARTS

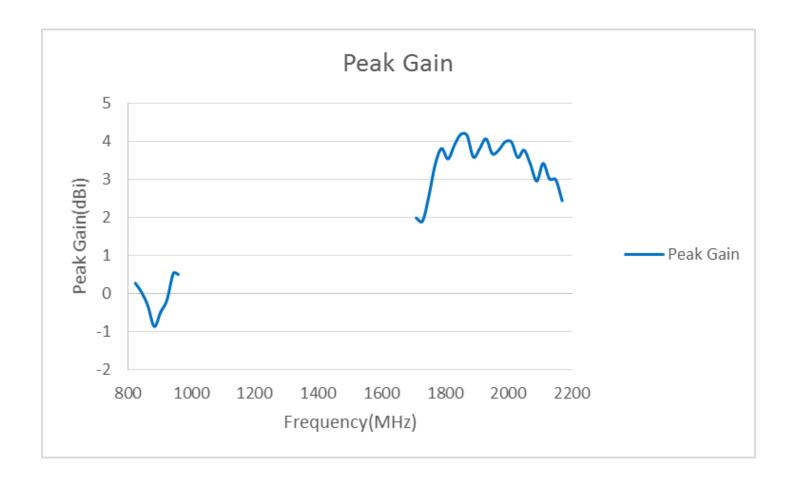






Description: 824-960/1710-2170MHz 2G/3G


Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PAR

PART NUMBER: W3538XXXXX

CHARTS

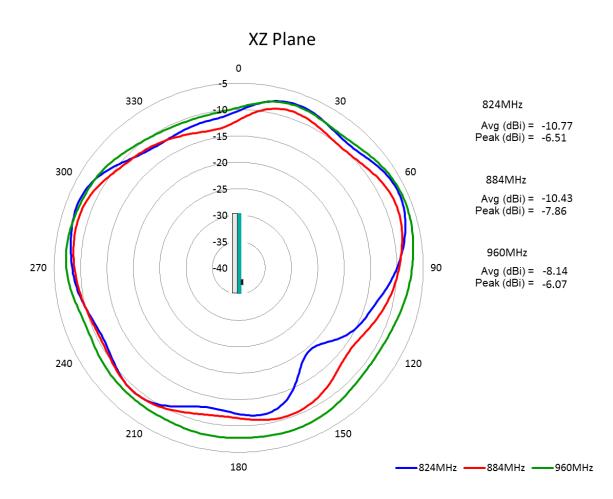









Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

CHARTS

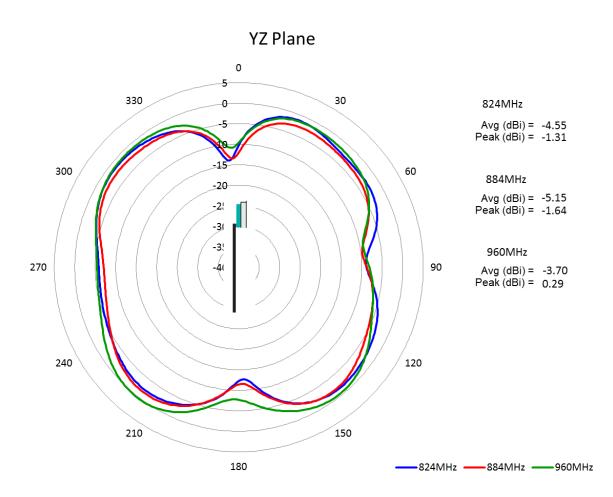









Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

CHARTS

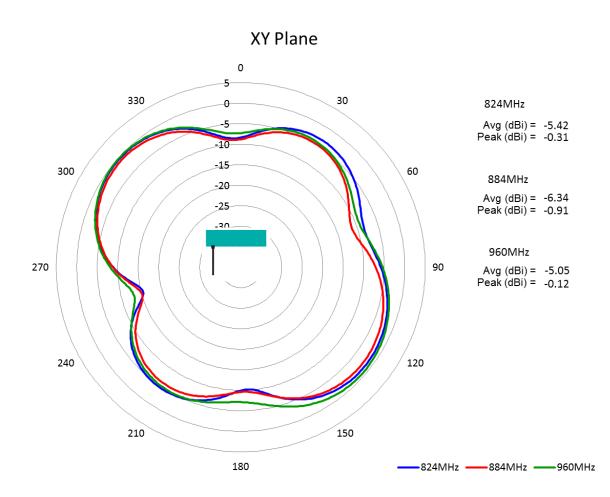









Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

CHARTS

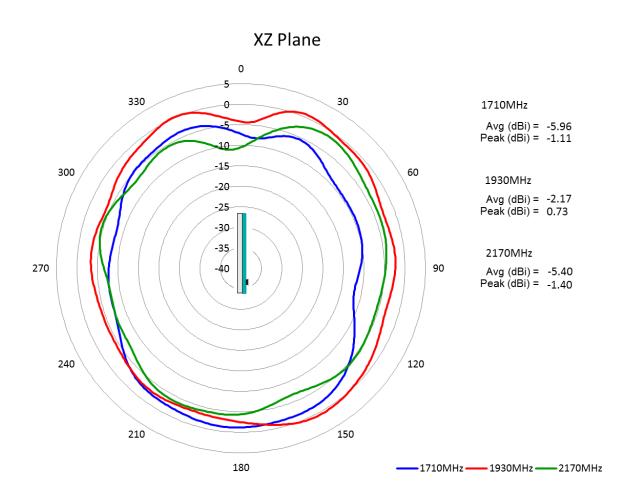









Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

CHARTS

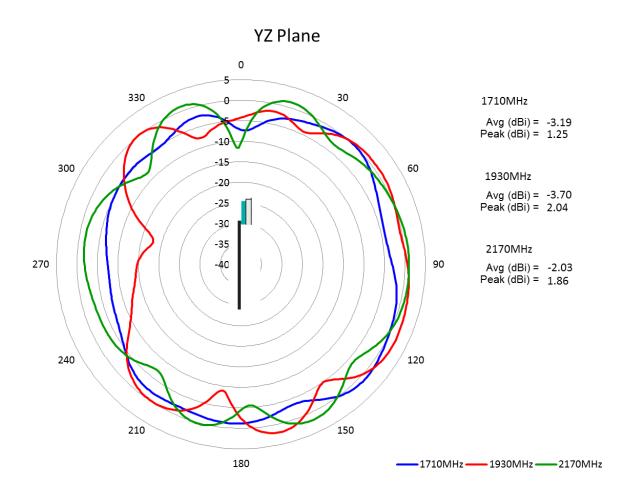









Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna PART NUMBER: W3538XXXXX

CHARTS

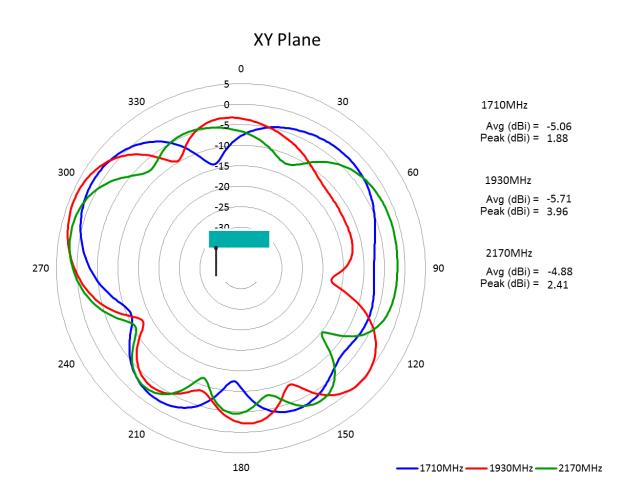







Description: 824-960/1710-2170MHz 2G/3G

Pentaband PCB antenna with coax feed

Series: Internal PCB Antenna **PART NUMBER: W3538XXXXX**

PACKAGING

10PCS/PE bag 10PE bag/foam bag 10 foam bag/ carton box Total 1000PCS/carton box



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

W3538E0150 W3538B0150 W3538B0200 W3538E0200 W3538M0200