

Metal Film Resistors

Precision Type

Normal & Miniature Style [MFP Series]



INTRODUCTION

The MFP Series Metal Film Precision Resistors are manufactured using a vacuum sputtering system to deposit multiple layers of mixed metal alloys and passivative materials onto a carefully treated high grade ceramic substrate. After a helical groove has been cut in the resistive layer, tinned connecting leads of electrolytic copper are welded to the end-caps. The resistors are coated with layers of blue color lacquer. Ultra high precision resistors, ultra high stability, ultra low temperature coefficient.


FEATURES

Power Rating	1/6W, 1/4W, 0.4W, 1/2W, 0.6W, 1W, 2W, 3W
Resistance Tolerance	±0.1%, ±0.25%, (±0.02%, ±0.05% on request)
T.C.R.	±15ppm/°C, ±25ppm/°C, (±5ppm/°C, ±10ppm/°C on request)

DERATING CURVE


For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with the curve below.

Rated Load (%)

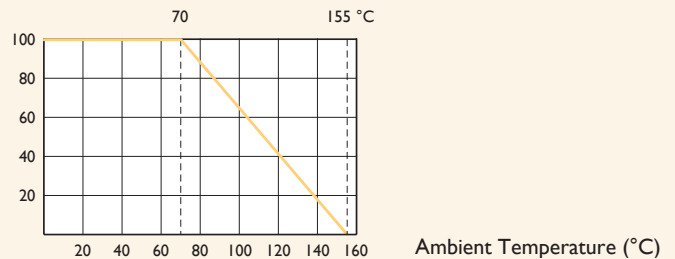

DIMENSIONS

Unit: mm



STYLE

DIMENSION

Normal	Miniature	L	øD	H	ød
MFP-12	MFP25S	3.4±0.3	1.9±0.2	28±2.0	0.45±0.05
MFP204	-	3.4±0.3	1.9±0.2	28±2.0	0.45±0.05
MFP-25	MFP50S	6.3±0.5	2.4±0.2	28±2.0	0.55±0.05
MFP207	-	6.3±0.5	2.4±0.2	28±2.0	0.55±0.05
MFP-50	MFP1WS	9.0±0.5	3.3±0.3	26±2.0	0.55±0.05
MFP100	MFP2WS	11.5±1.0	4.5±0.5	35±2.0	0.8±0.05
MFP200	MFP3WS	15.5±1.0	5.0±0.5	33±2.0	0.8±0.05

Note:

ELECTRICAL CHARACTERISTICS

STYLE	MFP-12	MFP25S	MFP204	MFP-25	MFP50S	MFP207	MFP-50	MFPIWS	MFPI00	MFP2WS	MFP200	MFP3WS
Power Rating at 70°C	1/6W	1/4W	0.4W	1/4W	1/2W	0.6W	1/2W	1W		2W		3W
Maximum Working Voltage	150V	200V		250V			350V	400V	500V			
Maximum Overload Voltage	300V	400V		500V	600V		700V	800V	1,000V			
Voltage Proof on Insulation	300V			500V				700V	1,000V			
Resistance Range	10Ω - 1 MΩ for E192 series value											
Operating Temp. Range	-55°C to +155°C											
Temperature Coefficient	±15ppm/°C, ±25ppm/°C											

Note: Special value is available on request

ENVIRONMENTAL CHARACTERISTICS

PERFORMANCE TEST	TEST METHOD		APPRAISE
Short Time Overload	IEC 60115-1 4.13	2.5 times RCWV for 5 sec. (Not more than maximum Overload Voltage)	±0.25%+0.05Ω
Voltage Proof on Insulation	IEC 60115-1 4.7	In V-Block for 60 sec., test voltage as above table	No Breakdown
Temperature Coefficient	IEC 60115-1 4.8	Between -55°C to +155°C	By type
Insulation Resistance	IEC 60115-1 4.6	in V-block for 60 Sec.	>10,000MΩ
Solderability	IEC 60115-1 4.17	245±5°C for 3±0.5 Sec.	95% Min. coverage
Solvent Resistance of Marking	IEC 60115-1 4.30	IPA for 5±0.5 Min. with ultrasonic	No deterioration of coatings and markings
Robustness of Terminations	IEC 60115-1 4.16	Direct load for 10 Sec. in the direction of the terminal leads	≥2.5kg (24.5N)
Periodic-pulse Overload	IEC 60115-1 4.39	4 times RCWV 10,000 cycles (1 Sec. on, 25 Sec. off)	±1.0%+0.05Ω
Damp Heat Steady State	IEC 60115-1 4.24	40±2°C, 90-95% RH for 56 days, loaded with 0.1 times RCWV	±1.5%+0.05Ω
Endurance at 70°C	IEC 60115-1 4.25	70±2°C at RCWV (or Umax., Whichever less) for 1,000 Hr. (1.5Hr: on, 0.5Hr: Off)	±1.5%+0.05Ω
Temperature Cycling	IEC 60115-1 4.19	-55°C ⇒ Room Temp. ⇒ +155°C ⇒ Room Temp. (5 cycles)	±0.75%+0.05Ω
Resistance to Soldering Heat	IEC 60115-1 4.18	260±3°C for 10±1 Sec., immersed to a point 3±0.5mm from the body	±0.25%+0.05Ω

Note: RCWV(Rated Continuous Working Voltage) = $\sqrt{\text{Power Rating} \times \text{Resistance Value}}$ or Max. working voltage listed above, whichever less.

Revision: 2020

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Yageo:

[MFP-25BRD52-68K](#) [MFP-25BRD52-90K9](#) [MFP-25BTD52-126K](#) [MFP-25BTD52-200K](#) [MFP-25BTD52-22R](#) [MFP-25BTD52-27K](#) [MFP-25BTD52-2K](#) [MFP-25BTD52-30K1](#) [MFP-25BTD52-34K8](#) [MFP-25BTD52-3K4](#) [MFP-25BTD52-47K](#) [MFP-25BTD52-4K75](#) [MFP25SBRC52-23K2](#) [MFP-25BTD52-13K3](#) [MFP-25BTD52-1K82](#) [MFP-25BTD52-23K7](#) [MFP-25BTD52-24K](#) [MFP-25BTD52-330K](#) [MFP-25BTD52-3K9](#) [MFP-25BTD52-499K](#) [MFP-25BTD52-4K7](#) [MFP-25BTD52-5K6](#) [MFP-25BTD52-22K](#) [MFP-25BTD52-22K1](#) [MFP-25BTD52-2K4](#) [MFP-25BTD52-2K7](#) [MFP-25BTD52-442K](#) [MFP-25BTD52-6K8](#) [MFP-25BTD52-75K](#) [MFP-25BTD52-80K6](#) [MFP50SCTD52-953K](#) [MFP207BTD52-102K](#) [MFP207BTD52-120K](#) [MFP207BTD52-121K](#) [MFP207BTD52-1K8](#) [MFP207BTD52-20K](#) [MFP207BTD52-3K6](#) [MFP207BTD52-6K8](#) [MFP207BTD52-80K](#) [MFP-25BRD52-15K4](#) [MFP-25BRD52-226K](#) [MFP-25BRD52-46K4](#) [MFP-25BRD52-46R4](#) [MFP-25BRD52-620R](#) [MFP-25BTC52-125R](#) [MFP-25BTC52-130R](#) [MFP-25BTC52-133R](#) [MFP-25BTD52-10R](#) [MFP-25BTD52-1K43](#) [MFP-25BTD52-1K18](#) [MFP-25BTD52-270K](#) [MFP-25BTD52-27K4](#) [MFP-25BTD52-470K](#) [MFP-25BRD52-274R](#) [MFP-25BRD52-51K](#) [MFP-25BRD52-560R](#) [MFP-25BTC52-300R](#) [MFP-25BTD52-154K](#) [MFP-25BTD52-2K2](#) [MFP-25BTD52-500K](#) [MFP-25BTD52-60K](#) [MFP-25BTD52-680K](#) [MFP-25BTD52-6K2](#) [MFP-25BTD52-89K8](#) [MFP-25BTD52-90K](#) [MFP-25BTD52-300K](#) [MFP-25BTD52-40K2](#) [MFP-25BTD52-42K2](#) [MFP-25BTD52-46K8](#) [MFP-25BTD52-51K1](#) [MFP-25BTD52-590K](#) [MFP-25BTD52-825R](#) [MFP50SCTD52-18K](#) [MFP207BTD52-41K2](#) [MFP207BTD52-698K](#) [MFP-25BRD52-16K9](#) [MFP-25BRD52-215K](#) [MFP-25BRD52-24K](#) [MFP207BTD52-4K02](#) [MFP207BTD52-50R](#) [MFP-25BRD52-10K1](#) [MFP-25BRD52-261R](#) [MFP-25BRD52-2K03](#) [MFP-25BRD52-39K2](#) [MFP-25BRD52-6K81](#) [MFP-25BTC52-261R](#) [MFP-25BTD52-15K](#) [MFP-25BTD52-220K](#) [MFP-25BTD52-2K43](#) [MFP-25BTD52-51K](#) [MFP-25BTD52-5K](#) [MFP-25BTD52-77K7](#) [MFP50SCTD52-100K](#) [MFP-25BRD52-25K5](#) [MFP-25BRD52-2K55](#) [MFP-25BRD52-3K16](#) [MFP-25BRD52-40K2](#) [MFP-25BRD52-4K64](#) [MFP-25BRD52-690R](#) [MFP-25BRD52-6K2](#)