

Description: 1608 Diplexer

PART NUMBER: DPX1608LKFBR2460L

Features:

- · Compact size
- RoHS compliant

Applications:

- WLAN, 802.11a/b/g/n/ax
- WiFi 6E
- ISM Band

ELECTRICAL SPECIFICATIONS

Low-Band

Item	Frequency Range(MHz)	Min.	Тур.	Max.
Insertion Loss (dB)	2400~2500	-	0.53	0.7
Return Loss (dB)	2400~2500	12	22.4	-
	3300~4800	2	4.7	-
	4800~5000	33	36.7	-
Attanuation (dP)	5170~7125	28	37.0	-
Attenuation (dB)	7200~7500	30	43.8	-
	9600~10000	24	28.8	-
	12000~12500	17	20.4	-

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Description: 1608 Diplexer

PART NUMBER: DPX1608LKFBR2460L

ELECTRICAL SPECIFICATIONS

High-Band

Item	Frequency Range(MHz)	Min.	Тур.	Max.
Insertion Loss (dB)	5170~7125	-	0.77	0.9
Return Loss (dB)	5170~7125	10	17.7	-
	70~108	40	50.0	-
	700~915	35	41.0	-
	915~960	35	41.4	-
	1425~1470	35	44.8	-
	1470~1557	35	44.9	-
	1557~1607	35	46.9	-
	1710~1785	35	48.9	-
	1805~1850	35	49.8	-
Attenuation (dB)	1850~1910	35	49.1	-
Atteridation (db)	1910~2020	35	47.6	-
	2110~2200	30	40.8	-
	2300~2400	26	35.0	-
	2400~2500	25	32.5	-
	2500~2690	20	28.9	-
	3400~3800	10	16.1	-
	10340~14250	25	27.3	-
	15510~16500	27	33.1	-
	16500~21375	-	12.5	-

Common

Item	Frequency Range(MHz)	Min.	Тур.	Max.
Deturn Loop (dD)	2400~2500	10	17.6	-
Return Loss (dB)	5170~7125	10	19.6	-

Operating Temperature Range: -40~85°C

Power Capacity: 3W max.

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 1608 Diplexer

PART NUMBER: DPX1608LKFBR2460L

MECHANICAL DIMENSION

Dimension

L	W	T	а	
1.60±0.15	0.80±0.10	0.60±0.10	0.20±0.10	
b	С	р		
0.15±0.10	0.20±0.10	0.50±0.05		


NOTE: Dimensions in mm.




<u>Termination</u>							
Top	View						
6	(5)	4					
1	2	3					

Terminal name	Function
1	GND
2	Common
3	GND
4	Low band
5	GND
6	High band

Reference design of EVB

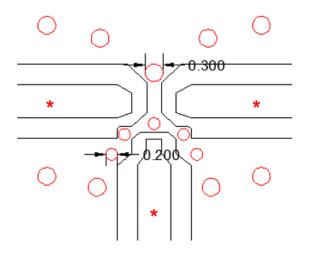



Unit: mm


^{*}Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.



Description: 1608 Diplexer


PART NUMBER: DPX1608LKFBR2460L

MEASURING DIAGRAM



Test Instrument: Agilent E5071C Network Analyzer or equivalent.

ELECTRICAL PERFORMANCES

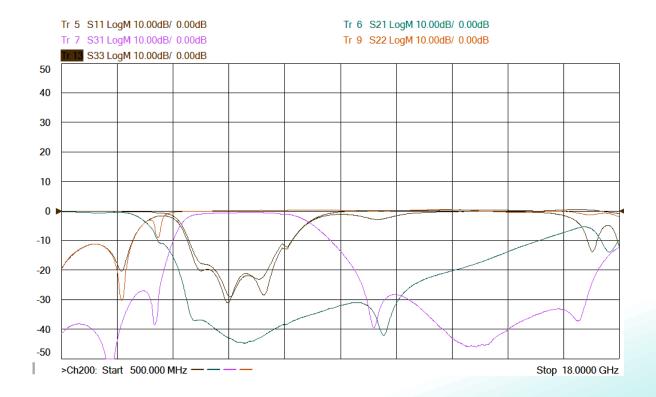





Description: 1608 Diplexer

PART NUMBER: DPX1608LKFBR2460L

PACKING SPECIFICATION


Peel-off force

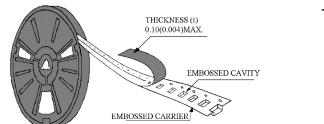

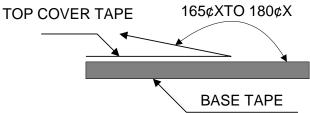

The force for peeling of cover tape is 10 grams in the arrow direction.


Dimension (Unit: mm)



TYPE	A	В	С	D	E	F
8 mm	178±1	60+0.5 -0	1	13±0.2	9±0.5	12±0.5
12 mm	178±0.3	60±0.2	19.3±0.1	13.5±0.1	13.6±0.1	-

Taping quantity

SERIES	5824 5724	5320 5220	4532	4516	3225	3216 2520	2012 1608	1005 0605
PCS/Reel	5000	3000	1000	2000	2500	3000	4000	10000

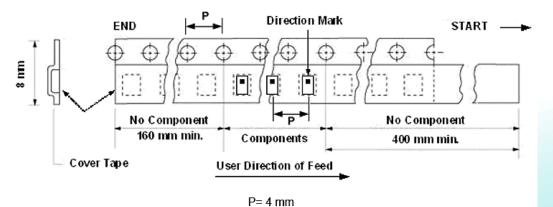

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: 1608 Diplexer

PART NUMBER: DPX1608LKFBR2460L

RF	EVI	SI	10	J F	415	STO)R'	Υ
1 / L		\mathbf{v}	•			<i>,</i> , ,	<i>-</i> \	

RevisionDateDescriptionVersion 1Feb. 24, 2022- New issue

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

DPX1608LKFBR2460L