


High Frequency Wire Wound Transformers

EP13 Reinforced Insulation - PA5000.XXXNL, PA5111.XXXNL, PA5112.XXXNL



Pulse
a YAGEO company

- Industry standard footprint with reinforced insulation
- Power Range:** Up to 24W
- Height:** 16.5mm Max
- Footprint:** 17.7mm x 13.5mm Max
- Topology:** Forward and Flyback
- >8.0mm creepage, 3.0kVrms Isolation

Pulse PN	Electrical Specifications @25°C – Operating Temperature -40°C to 130°C ¹					Schematic	
PA5000.001NL	Pri. Inductance	(1-3)	100	uH +/- 15%			Forward Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.0	uH Max			
	DCR	(1-3)	150	mΩ Max			
		(10-9)	15				
		(7-6)	15				
		(4-5)	500				
	Hi-Pot	Pri-Sec	3000	Vac			
K1 Factor	32.9						
PA5000.002NL	Pri. Inductance	(1-3)	100	uH +/- 15%			Forward Transformer
	Lk. Inductance	(10-9)	1.0	uH Max			
	DCR	(1-3)	150	mΩ Max			
		(10-9)	20				
		(7-6)	20				
		(4-5)	500				
	Hi-Pot	Pri-Sec	3000	Vac			
K1 Factor	32.9						
PA5000.003NL	Pri. Inductance	(1-3)	100	uH +/- 15%			Forward Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.0	uH Max			
	DCR	(1-3)	150	mΩ Max			
		(10-9)	50				
		(7-6)	50				
		(4-5)	500				
	Hi-Pot	Pri-Sec	3000	Vac			
K1 Factor	32.9						
PA5111.001NL	Pri. Inductance	(1-3)	80	uH +/- 10%			Flyback Transformer
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.5	uH Max			
	DCR	(1-3)	180	mΩ Max			
		(10-9)	15				
		(7-6)	15				
		(4-5)	500				
	Hi-Pot	Pri-Sec	3000	Vac			
K1 Factor	1913						

High Frequency Wire Wound Transformers

EP13 Reinforced Insulation - PA5000.XXXNL, PA5111.XXXNL, PA5112.XXXNL



Pulse PN	Electrical Specifications @25°C – Operating Temperature -40°C to 130°C¹				Schematic
PA5111.002NL	Pri. Inductance	(1-3)	80	uH +/- 10%	
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.5	uH Max	
	DCR	(1-3)	180	mΩ Max	
		(10-9)	20		
		(7-6)	20		
		(4-5)	500		
	Hi-Pot	Pri-Sec	3000	Vac	
K1 Factor	1913				
PA5111.003NL	Pri. Inductance	(1-3)	80	uH +/- 10%	
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	1.5	uH Max	
	DCR	(1-3)	180	mΩ Max	
		(10-9)	50		
		(7-6)	50		
		(4-5)	500		
	Hi-Pot	Pri-Sec	3000	Vac	
K1 Factor	1913				
PA5112.001NL	Pri. Inductance	(1-3)	173	uH +/- 10%	
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	5.5	uH Max	
	DCR	(1-3)	550	mΩ Max	
		(10-9)	15		
		(7-6)	15		
		(4-5)	240		
	Hi-Pot	Pri-Sec	3000	Vac	
K1 Factor	2579				
PA5112.002NL	Pri. Inductance	(1-3)	173	uH +/- 10%	
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	5.5	uH Max	
	DCR	(1-3)	550	mΩ Max	
		(10-9)	20		
		(7-6)	20		
		(4-5)	240		
	Hi-Pot	Pri-Sec	3000	Vac	
K1 Factor	2355				
PA5112.003NL	Pri. Inductance	(1-3)	173	uH +/- 10%	
	Lk. Inductance	(1-3) w/ (10,9,6,7,4,5) shorted	5.5	uH Max	
	DCR	(1-3)	550	mΩ Max	
		(10-9)	50		
		(7-6)	50		
		(4-5)	240		
	Hi-Pot	Pri-Sec	3000	Vac	
K1 Factor	2305				

High Frequency Wire Wound Transformers


EP13 Reinforced Insulation - PA5000.XXXNL, PA5111.XXXNL, PA5112.XXXNL

Notes:

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 3250Gauss. To calculate the peak flux density use the following formula:
 $B_{pk} \text{ (Gauss)} = K1_Factor * I_{pk}(A)$
3. In high volt- μ sec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:
 $CoreLoss \text{ (W)} = 3.84E-14 * (Freq_kHz)^{1.63} * (\Delta B_Gauss)^{2.63}$
where ΔB can be calculated as:
For Flyback Topology: $\Delta B = K1_Factor * \Delta I(A)$
For Forward Topology: $\Delta B = K1_Factor * Volt\text{-}\mu sec$
4. The standard pin-numbering for this package is indicated in the below mechanical drawing showing pin 1 on the lower right corner and the numbers proceeding clockwise to pin 10 on the upper right corner.
5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA5000.001NL becomes PA5000.001NLT). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=32mm), pitch (Po=24mm) and depth (Ko=17.05mm).

Mechanical

PA5000.XXXNL/ PA5111.XXXNL/ PA5112.XXXNL

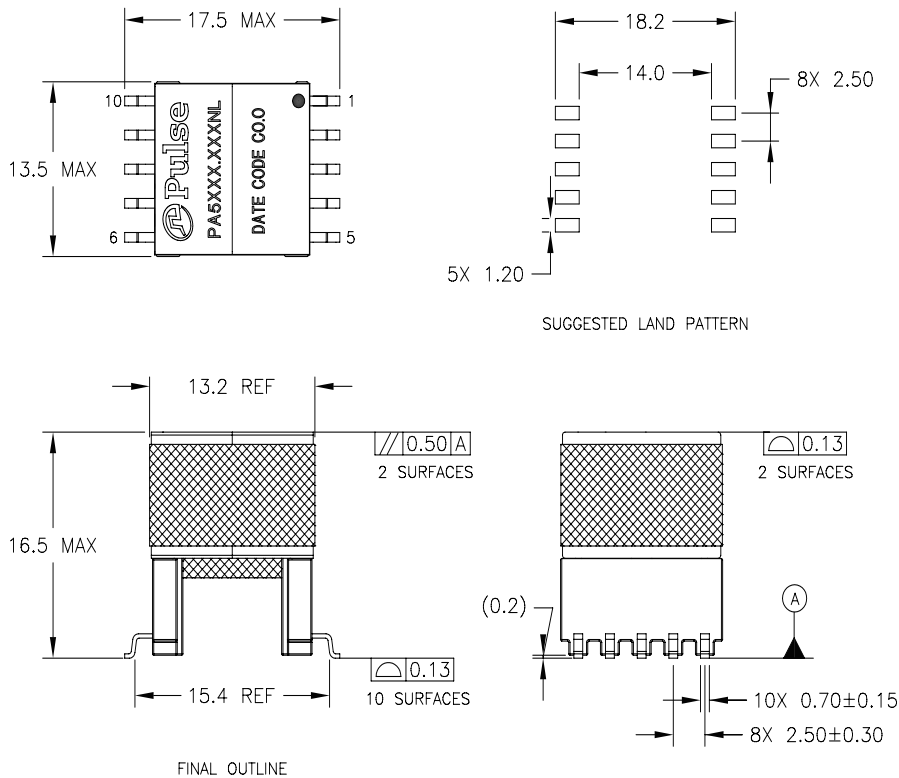

For More Information:

Americas - prodinfo_power_americas@yageo.com | Europe - prodinfo_power_emea@yageo.com | Asia - prodinfo_power_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2022. Pulse Electronics, Inc. All rights reserved.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Pulse:](#)

[PA5112.002NLT](#)