

a **YAGEO** company

Description: LTE Direct Mount

Series: DISC PART NUMBER: DSC11001DM



Features:

- LTE 4G antenna:
 - 698-960/1710-2700
- Gain 2 / 5 dBi
- Diameter 100mm
- · Height 34.8mm
- Cable RG174
- Connector SMA male
- IP67

Applications:

- 4G LTE
- Cat M1 and Cat 1 Devices
- 2G / 3G radios
- Vehicular use
- Utility boxes
- · Smart metering

All dimensions are in mm / inches

Issue: 2041

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



TECHNICAL DATA SHEET

Description: LTE Direct Mount

PART NUMBER: DSC11001DM

ELECTRICAL SPECIFICATIONS

Antenna Type PIFA

Frequency 698-960/1710-2700MHz

Nominal Impedance 50 Ω

Return Loss 698-960 -6dB/1710-2700 -8dB

Radiation Pattern Omni

Gain (Min) 698-960 2dBi / 1710-2700 5dBi

Efficiency(Min) 698-960 38%/ 1710-2700 50%

Polarization Linear Vertical



TECHNICAL DATA SHEET

Description: LTE Direct Mount

PART NUMBER: DSC11001DM

MECHANICAL SPECIFICATIONS

Antenna Color / Material Black

Connector type SMA Male

Cable type RG-174, Black

Cable length 500mm

Fixing system Direct Mount

P.S. requires a 3/4" (19mm) hole

in the mounting surface

Connector retention 30 N

Strain relief 30 N, applied to cable along axis

and perpendicular to cable entry

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature -40 ~ 85° C

Storage Temperature -40 ~ 85° C

Ingress Protection IP67

Wind-loading 160 km/h

RoHS Compliant Yes




TECHNICAL DATA SHEET

Description: LTE Direct Mount

PART NUMBER: DSC11001DM

MECHANICAL DRAWING

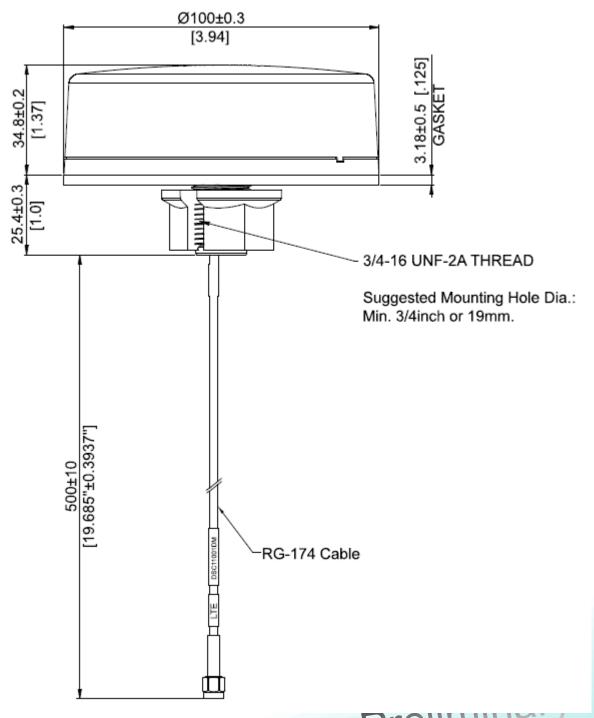

Issue: 2041

RoH:




TECHNICAL DATA SHEET

Description: LTE Direct Mount

PART NUMBER: DSC11001DM

TEST SETUP

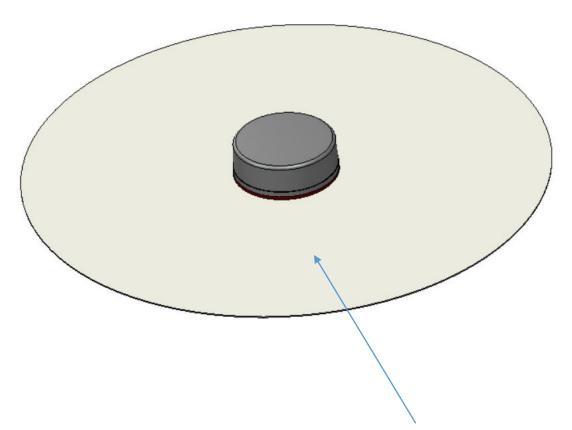

Diameter: 500 mm ground pane




Description: LTE Direct Mount

PART NUMBER: DSC11001DM

Series: DISC

CHARTS

Return Loss

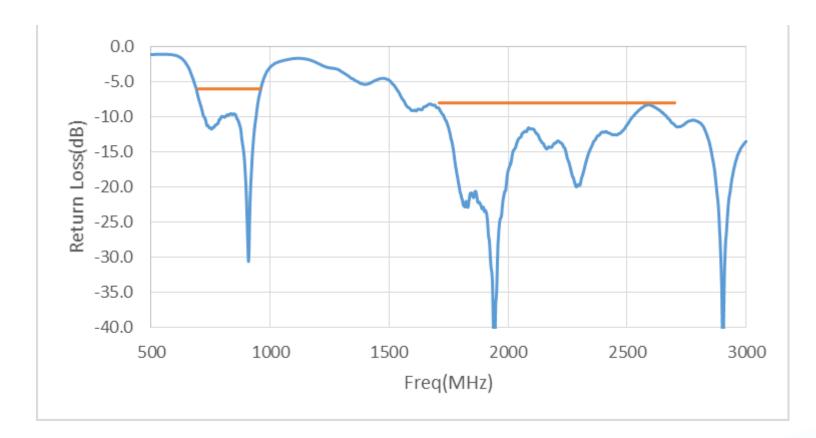

All data test with 500mm length cable

Issue: 2041




Description: LTE Direct Mount

PART NUMBER: DSC11001DM

Series: DISC

CHARTS

Gain(dBi) and Efficiency(%)

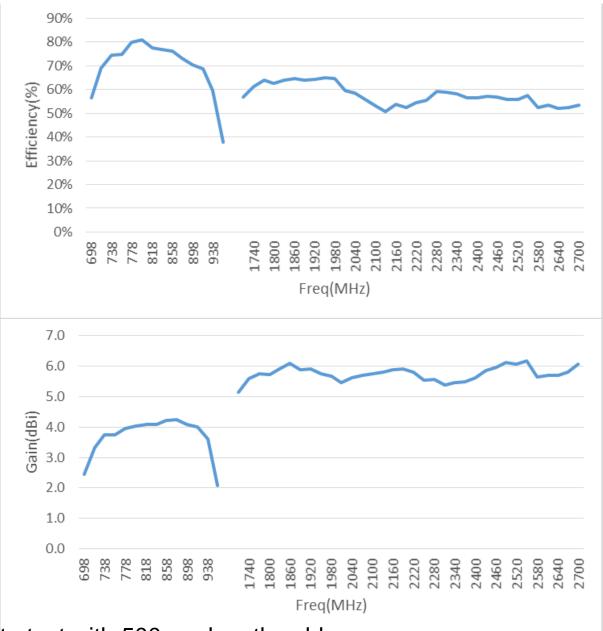

All data test with 500mm length cable

Issue: 2041

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: LTE Direct Mount


PART NUMBER: DSC11001DM

Series: DISC

CHARTS

Radiation Pattern

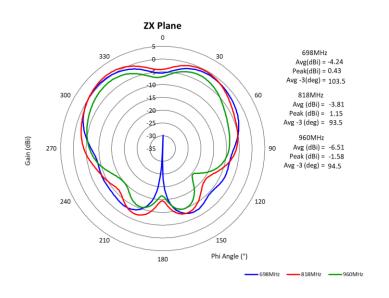

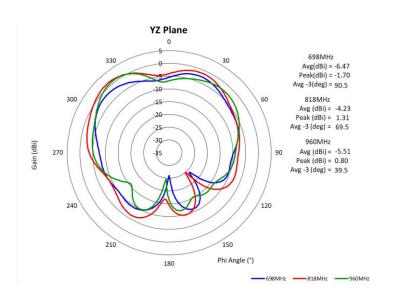



All data test with 500mm length cable

Issue: 2041

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION






Description: LTE Direct Mount


PART NUMBER: DSC11001DM

Series: DISC

CHARTS

Radiation Pattern

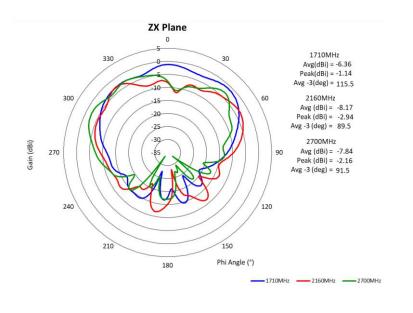

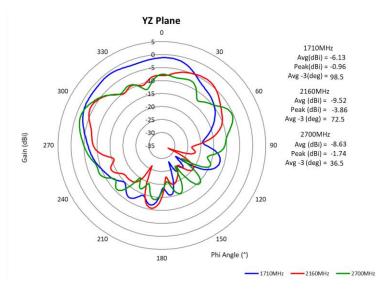





All data test with 500mm length cable

Issue: 2041

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION





Description: LTE Direct Mount

PART NUMBER: DSC11001DM

Series: DISC

PACKAGING

1 antenna packed in a foam bag

12 foam bags of antennas packed in a carton

1 label on each carton with part number, description, date code.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

DSC11001DM