

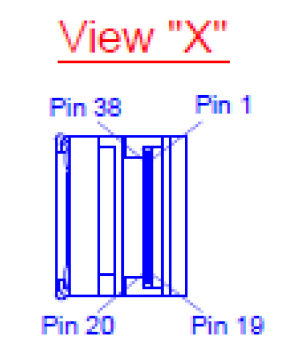


CONFIDENTIAL

	REVISION DESCRIPTION	APP.	DRW.	DATE	CHANGE No.
X 1	Change cable option	H.T	O.S	04/06/16	DC16-0026
X					
X					

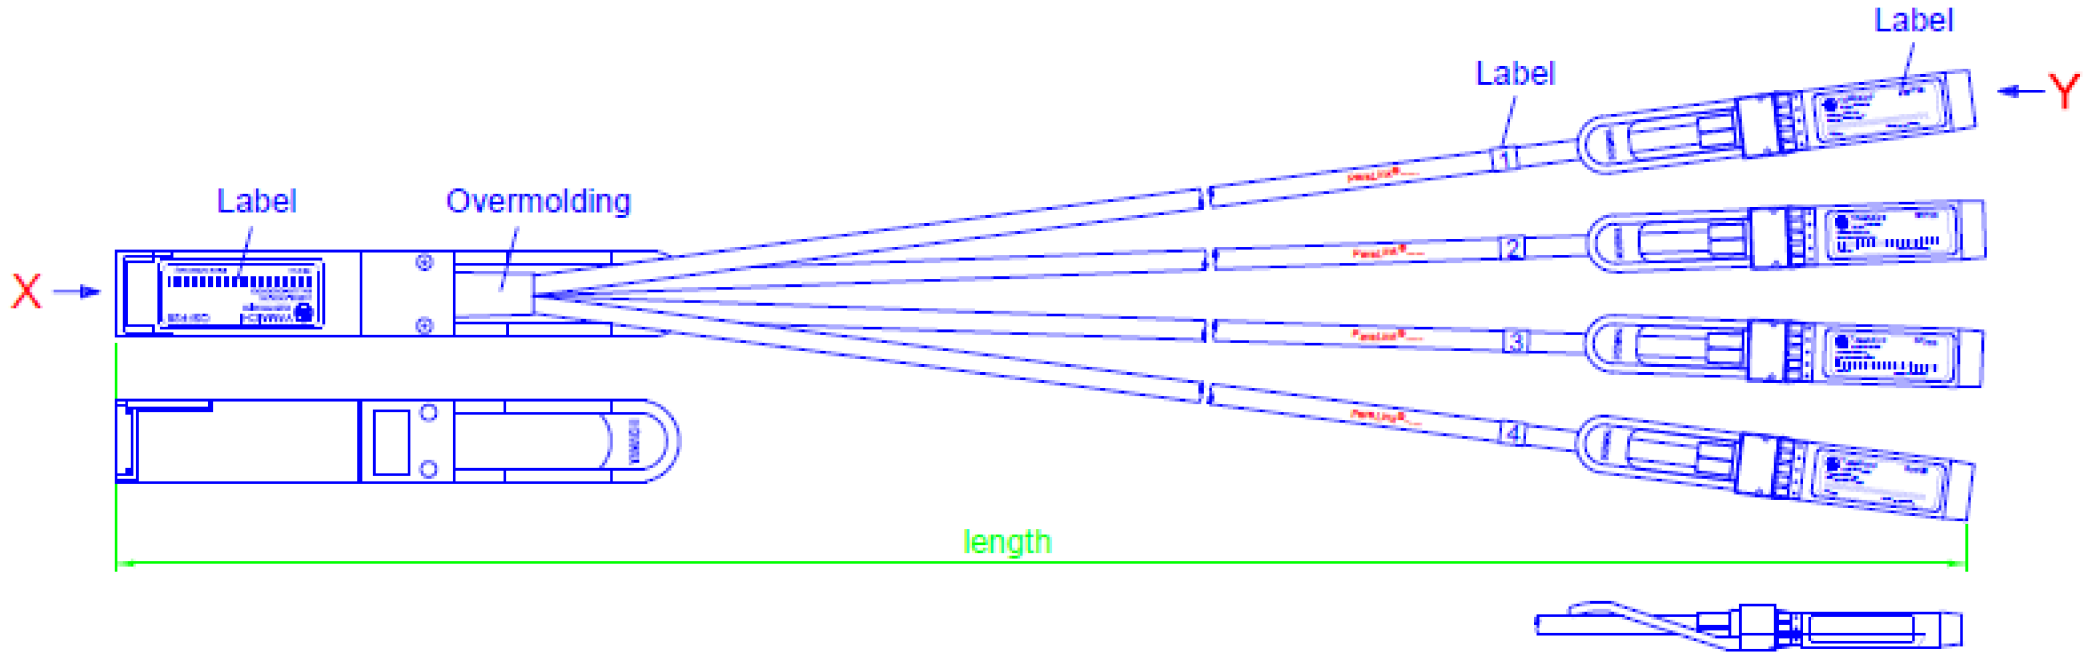

QSFP +				SFP+			
PIN				PIN			
1	Drain	----->		SFP+ 2 Drain		12	
2	TX2n	==>		SFP+ 2 RD-		13	
3	TX2p	==>		SFP+ 2 RD+		13	
4	Drain	----->		SFP+ 4 Drain		12	
5	TX4n	==>		SFP+ 4 RD-		13	
6	TX4p	==>		SFP+ 4 RD+		13	
13	Drain	----->		SFP+ 3 Drain		18	
14	RX3p	==>		SFP+ 3 TD+		19	
15	RX3n	==>		SFP+ 3 TD-		19	
16	Drain	----->		SFP+ 1 Drain		18	
17	RX1p	==>		SFP+ 1 TD+		18	
18	RX1n	==>		SFP+ 1 TD-		19	
19							
20	Drain	----->		SFP+ 2 Drain		19	
21	RX2n	==>		SFP+ 2 TD-		18	
22	RX2p	==>		SFP+ 2 TD+		18	
23	Drain	----->		SFP+ 4 Drain		19	
24	RX4n	==>		SFP+ 4 TD-		18	
25	RX4p	==>		SFP+ 4 TD+		18	
32	Drain	----->		SFP+ 3 Drain		13	
33	TX3p	==>		SFP+ 3 RD+		12	
34	TX3n	==>		SFP+ 3 RD-		12	
35	Drain	----->		SFP+ 1 Drain		13	
36	TX1p	==>		SFP+ 1 RD+		12	
37	TX1n	==>		SFP+ 1 RD-		12	
38							

- Note.
- Material: Backshells - Zinc diecast
Latch - Stainless steel
Pull - Molded Plastic
 - Length: See table
 - Raw cable is UL type CL2 75deg Celsius
 - Paddle card and all plastic materials of connector acc. UL94V-0

Part Number	Length (m)	AWG
CAU016-0001-D100	1.0 +/-0.06	30
CAU016-0001-B100	1.0 +/-0.06	26
CAU016-0001-D200	2.0 +/-0.06	30
CAU016-0001-B200	2.0 +/-0.06	26
CAU016-0001-D300	3.0 +/-0.06	30
CAU016-0001-D300	3.0 +/-0.06	26
CAU016-0001-D400	4.0 +/-0.06	26
CAU016-0001-B500	5.0 +/-0.06	26

RoHS

						YAMAICHI ELECTRONICS USA INC.			
						CLASS QSFP to SFP Break-Out Cable			
SCALE						Part # CAU016-0001-xxxx			
DIMENTION mm						DRW No. YEUA2757			
ANGLE PROJ 3rd						Sheet No. / REV. B			
						A3-001			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Yamaichi Electronics:](#)

[CAU016-0001-B300](#) [CAU016-0001-B500](#)