


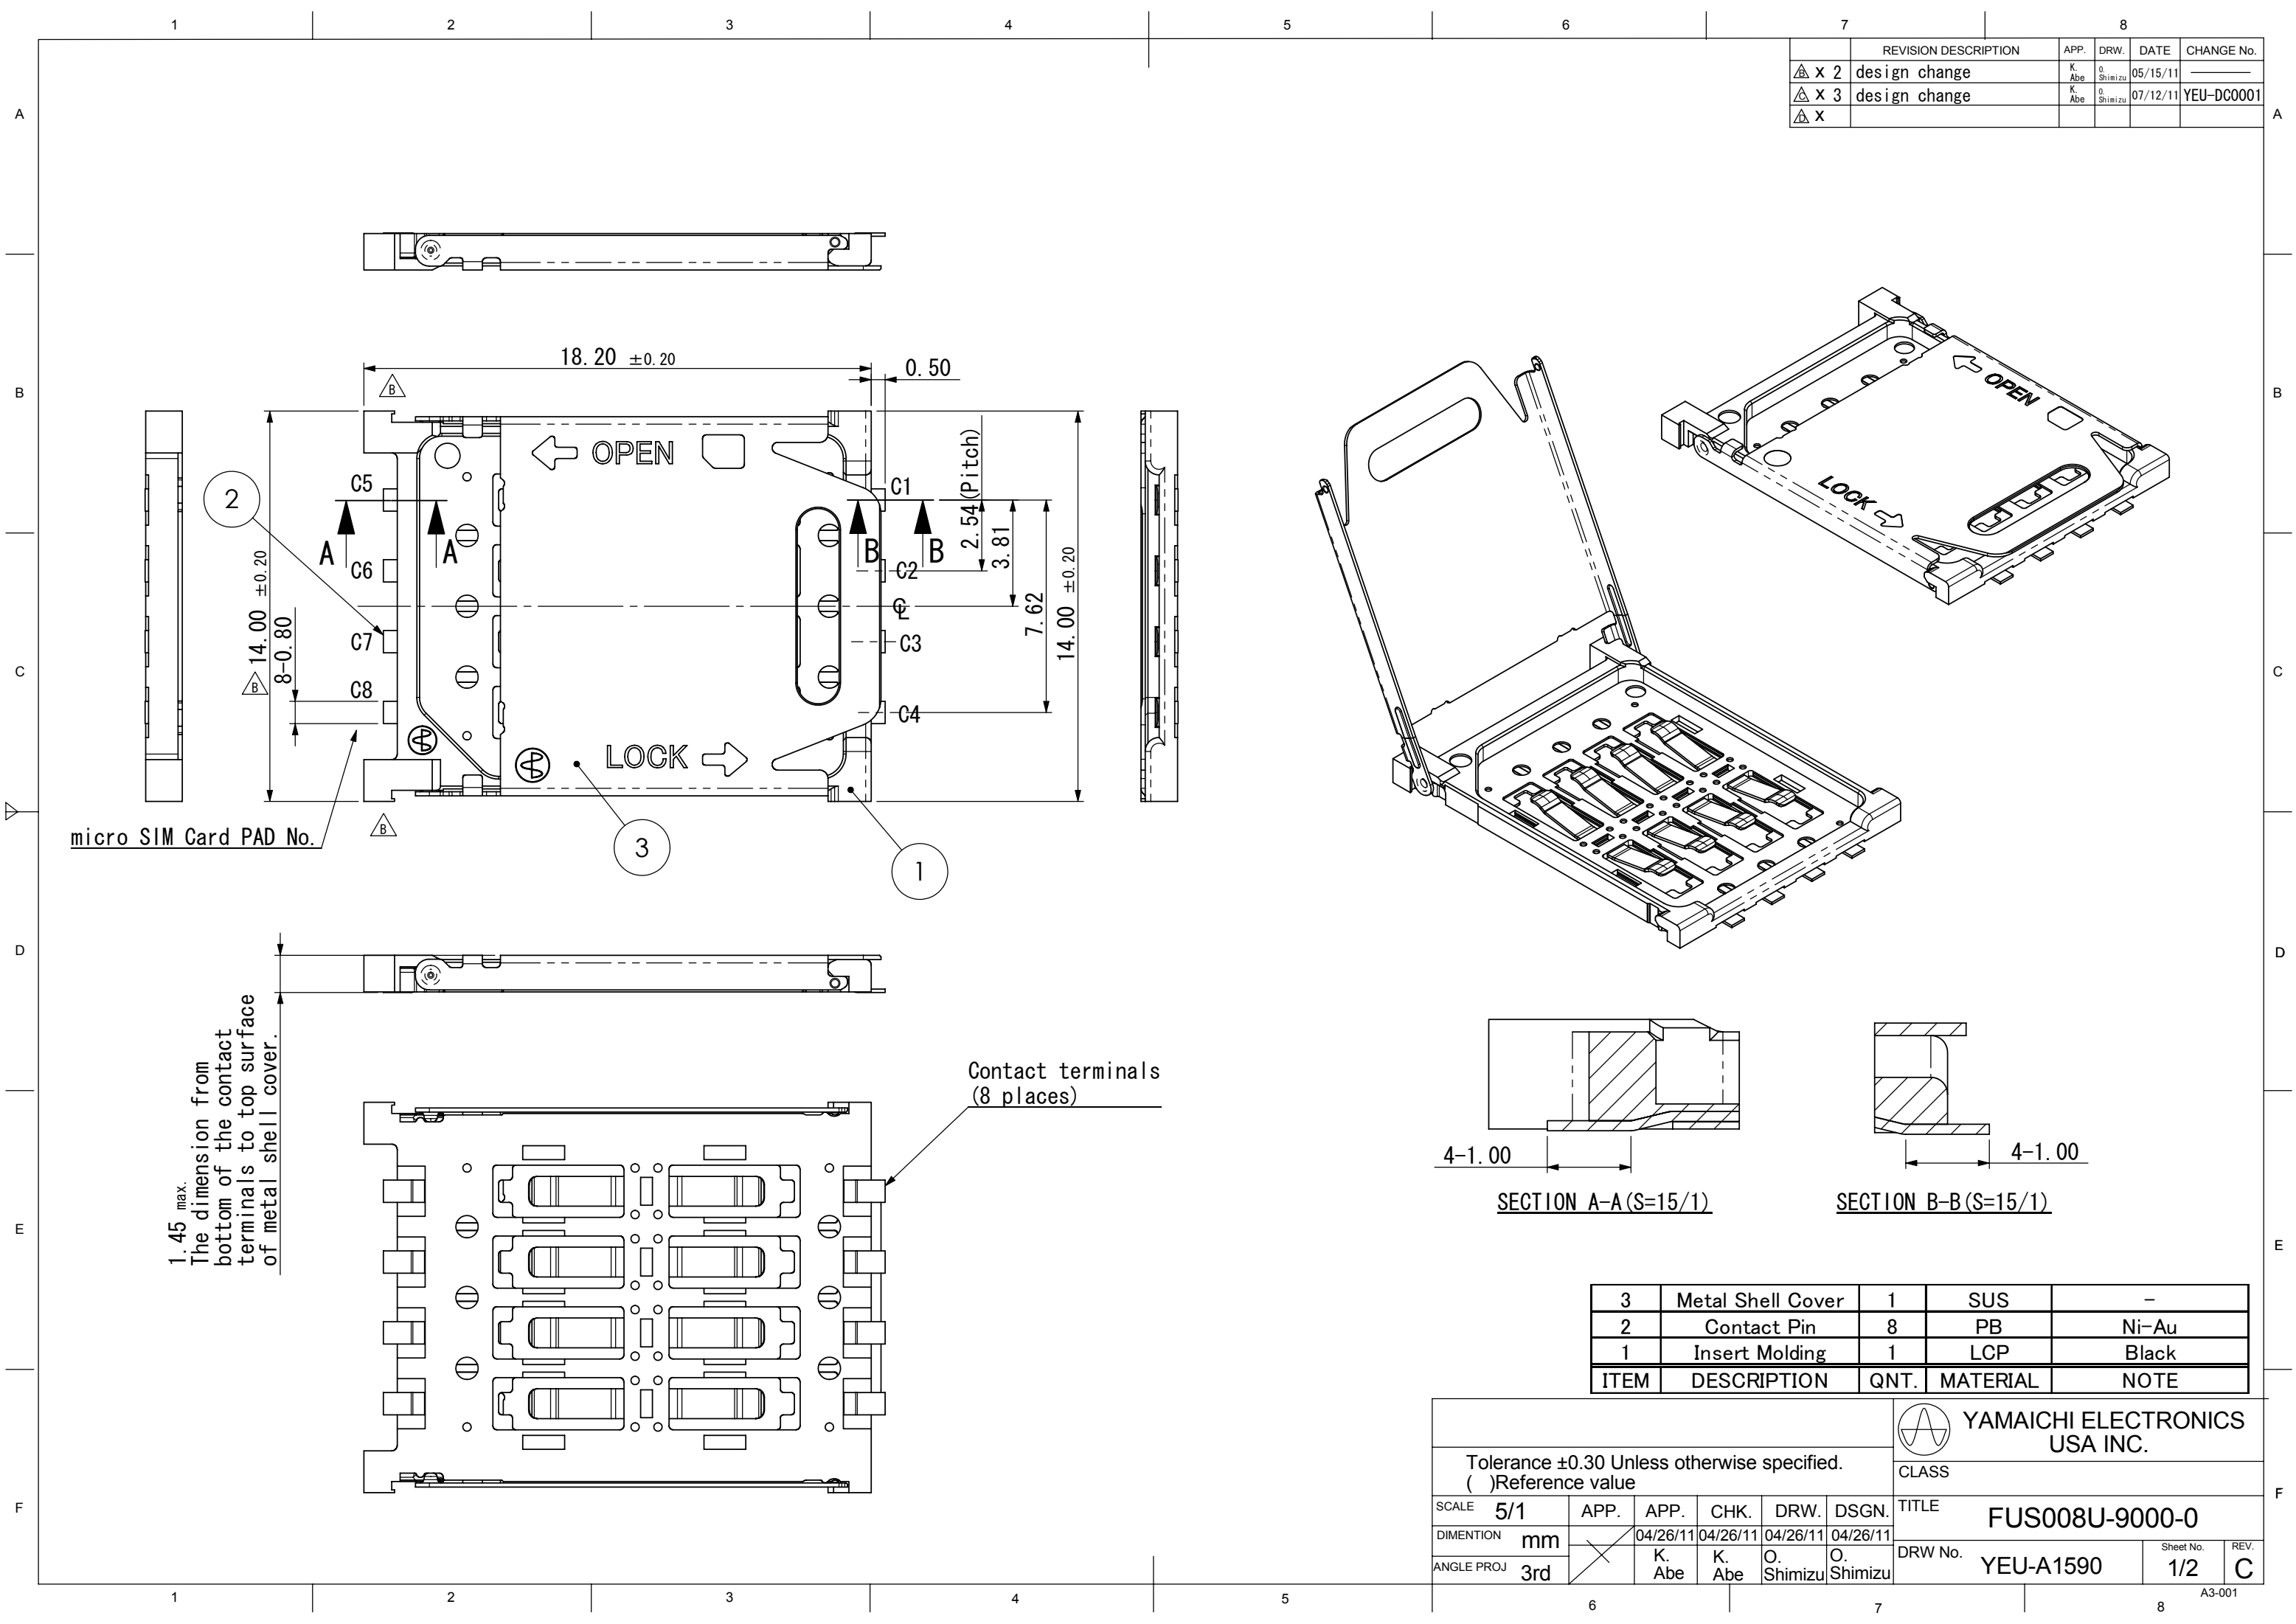



	REVISION DESCRIPTION	APP.	DRW.	DATE	CHANGE No.
△ X 2	design change	K. Abe	O. Shimizu	05/15/11	—
△ X 3	design change	K. Abe	O. Shimizu	07/12/11	YEU-DC0001
△ X					

3	Metal Shell Cover	1	SUS	—
2	Contact Pin	8	PB	Ni-Au
1	Insert Molding	1	LCP	Black
ITEM	DESCRIPTION	QNT.	MATERIAL	NOTE

							YAMAICHI ELECTRONICS USA INC.		
Tolerance ±0.30 Unless otherwise specified. ()Reference value						CLASS			
SCALE	5/1	APP.	APP.	CHK.	DRW.	DSGN.	TITLE		
DIMENTION	mm		04/26/11	04/26/11	04/26/11	04/26/11	FUS008U-9000-0		
ANGLE PROJ	3rd		K. Abe	K. Abe	O. Shimizu	O. Shimizu	DRW No.		Sheet No.
						YEU-A1590		1/2	C

Recommended PCB Layout (Connector Mounting Side)

Tolerances ±0.05 unless otherwise specified

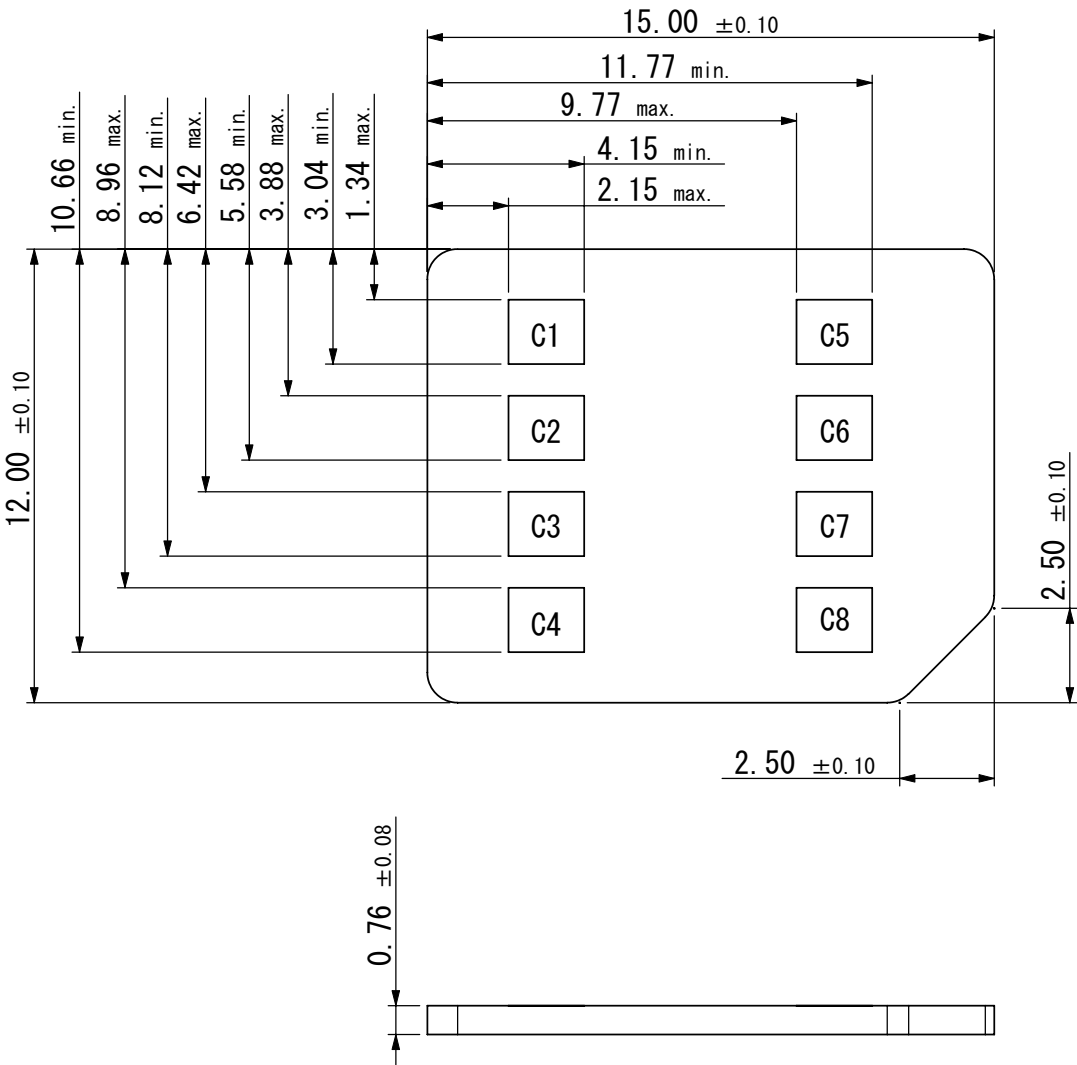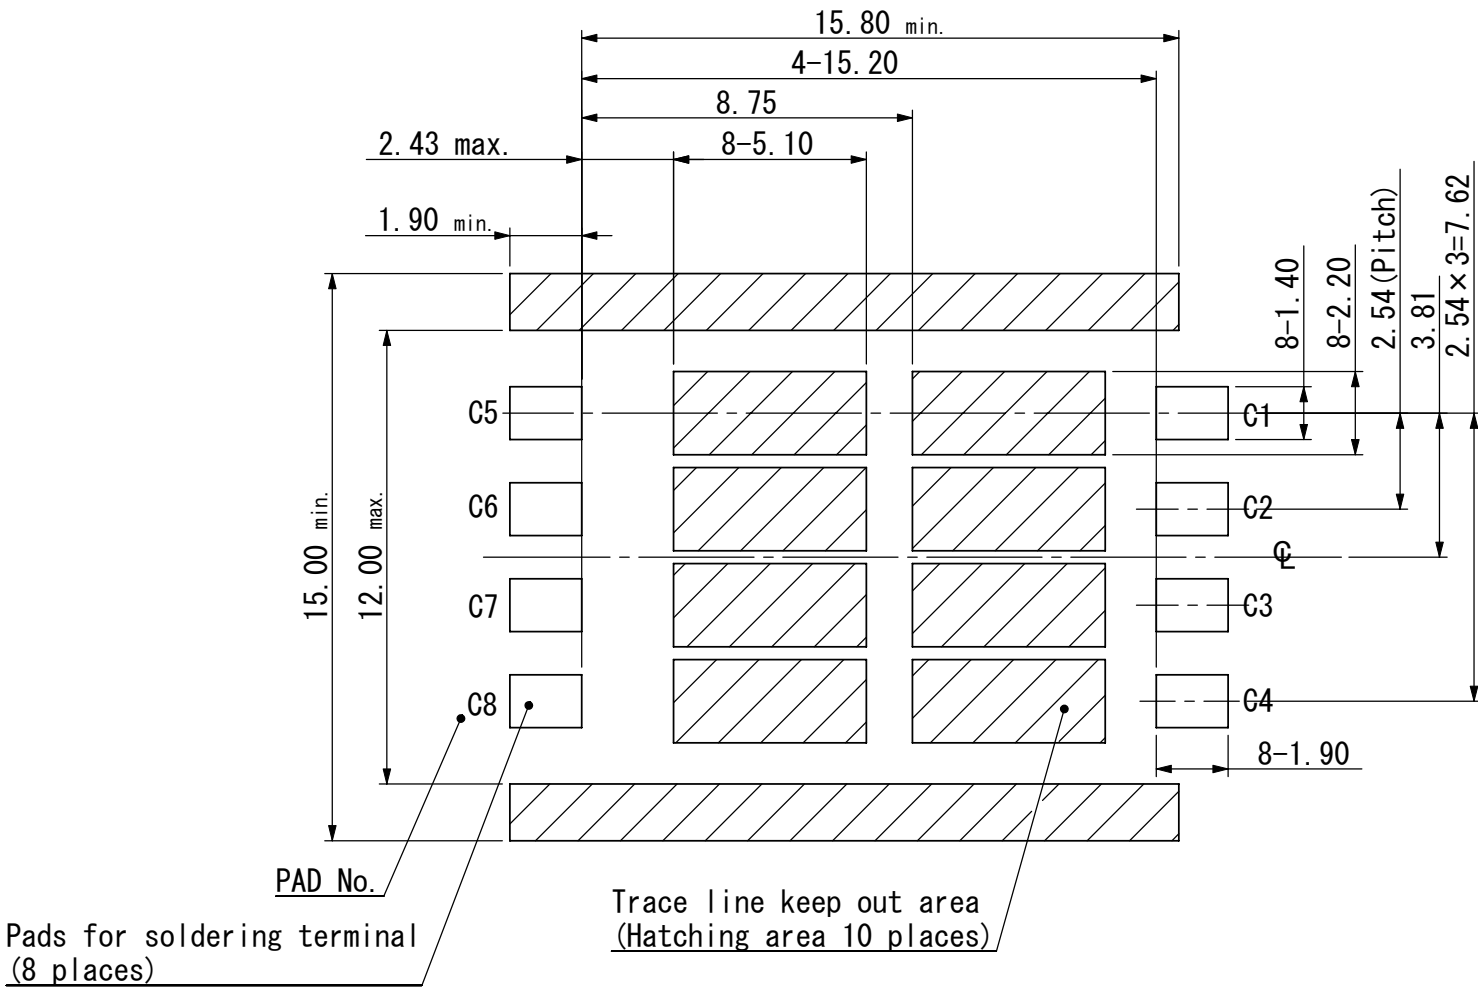

Applicable Card Size

Note

- 1. ϕ indicates the centerline of the connector with 14.00mm.
- 2. Coplanarity for contact terminals shall be 0.10mm maximum.
- 3. Pin Assignment

1	VCC(Supply voltage)
2	RST(Reset singnail)
3	CLT(Clock signal)
4	Reserved
5	GND(Ground)
6	VPP(Programining voltage)
7	I/O(Data input/output)
8	Reserved

							YAMAICHI ELECTRONICS USA INC.		
Tolerance ±0.30 Unless otherwise specified. ()Reference value							CLASS		
SCALE	5/1	APP.	APP.	CHK.	DRW.	DSGN.	TITLE		
DIMENTION	mm		04/26/11	04/26/11	04/26/11	04/26/11	FUS008U-9000-0		
ANGLE PROJ	3rd		K. Abe	K. Abe	O. Shimizu	O. Shimizu	DRW No.	YEU-A1590	Sheet No. 2/

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Yamaichi Electronics:](#)

[FUS008U-9000-0](#)