


REV.	ECO NO.	DESCRIPTION	RELEASED BY	DATE
B	6042	CHANGE CONNECTOR	JSK	5/2/08

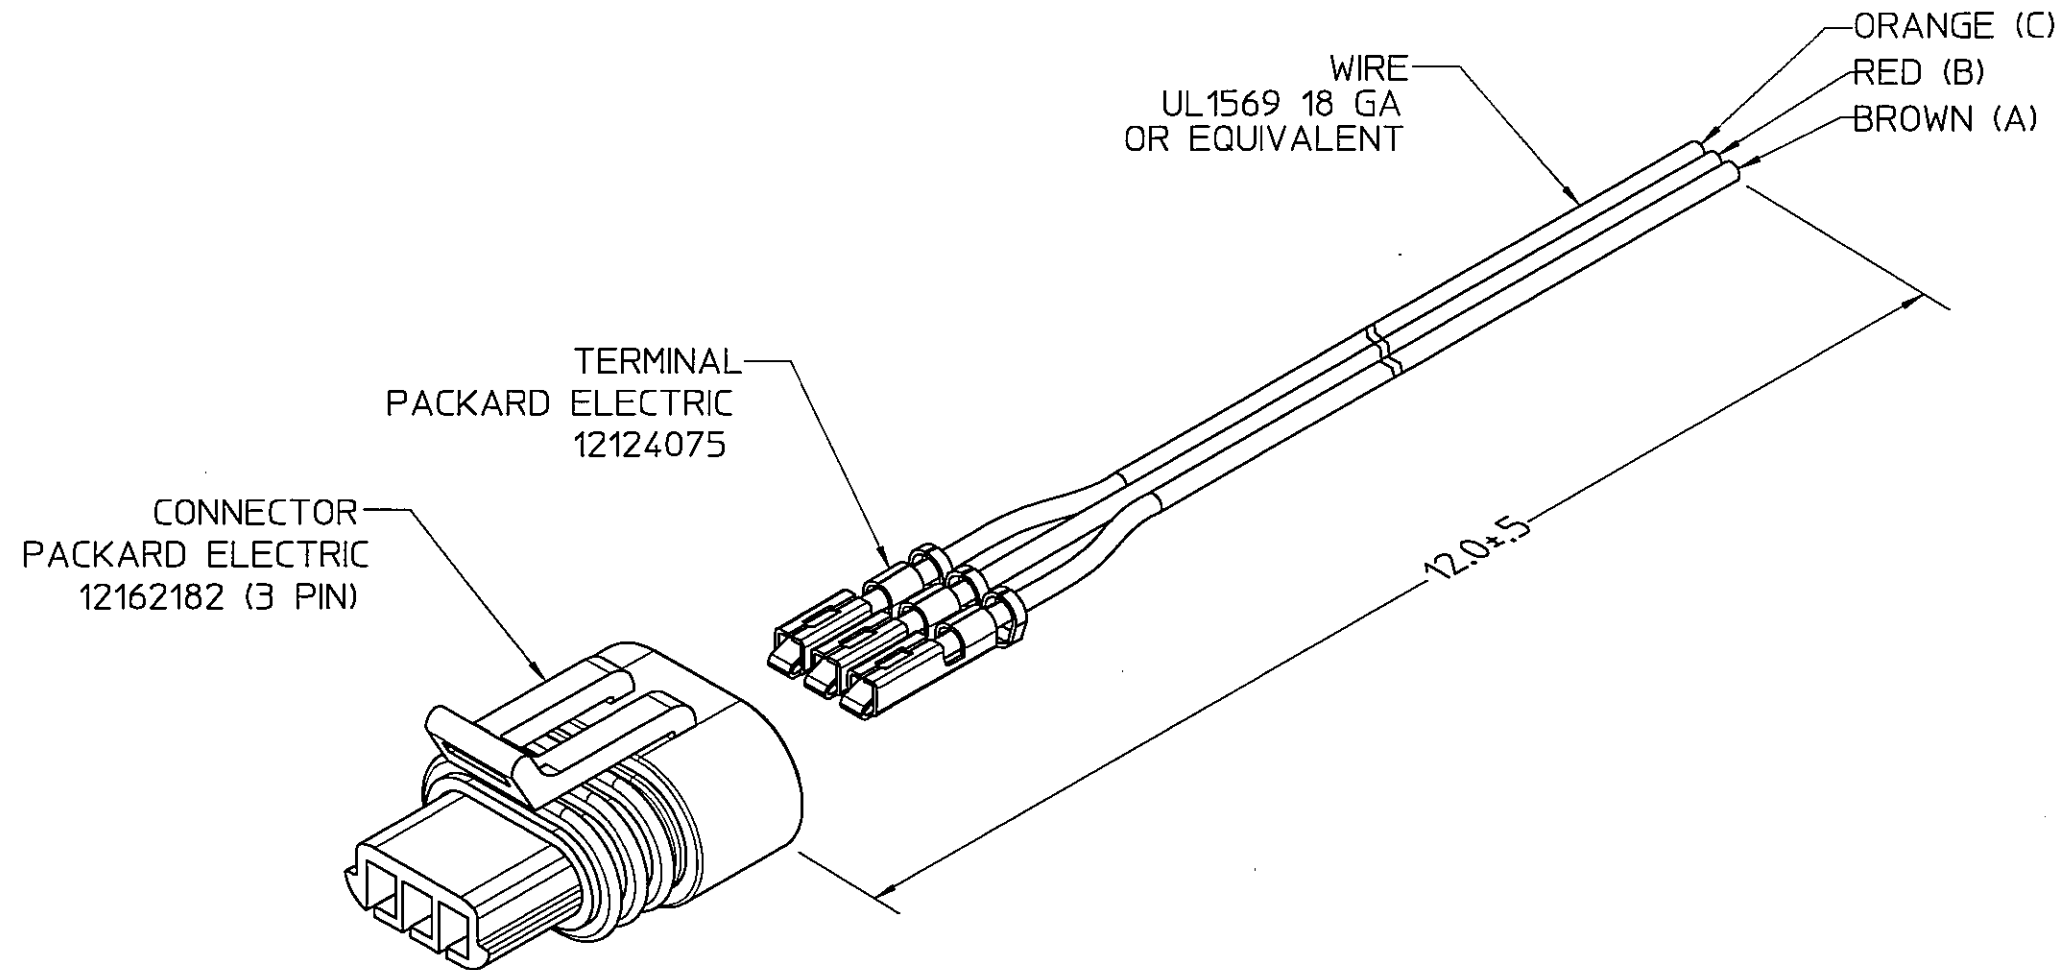

UNCONTROLLED DOCUMENT

PURCHASED ASSY

1. EXPLODED VIEW SHOWN FOR CLARITY.

- C** IDENTIFIES FEATURES THAT ARE DESIGNATED SIGNIFICANT BY CUSTOMER.
- SIG** IDENTIFIES FEATURES THAT SIGNIFICANTLY AFFECT FIT OR FUNCTION AND WHICH REQUIRE ADDITIONAL CONTROL PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.
- SPC** IDENTIFIES FEATURES THAT SHALL BE MONITORED FOR PROCESS CONTROL AND FOR WHICH STATISTICAL DATA SHALL BE SUBMITTED PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.

NOTES: UNLESS OTHERWISE SPECIFIED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES PER ASME Y14.5M					THIRD ANGLE PROJECTION		BEI DUNCAN ELECTRONICS DIVISION BEI TECHNOLOGIES, INC. DUNCAN ELECTRONICS DIVISION, 170 TECHNOLOGY DRIVE, IRVINE, CA 92618-2401		
TOLERANCES ARE:					APPROVALS	DATE	TITLE		
DECIMALS	ANGLES				DEPUE	29/APR/08	CABLE ASSY		
.XX ±.010	°.1°				CHECKED	4/30/08	MODEL 9850		
.XXX ±.005					DESIGN/ENG.		SIZE	CAGE CODE	DWG NO.
.XXXX ±.0005					ENG. APPROVAL		B	11534	1-172
DIAMETERS SHOWN ON COMMON CENTERS $\pm .005$							SCALE	PAGE 1 OF 1	
FEATURES SHOWN ON COMMON CENTERS $\pm .005$							2X		
INSIDE/OUTSIDE RADIUS .005 MAX.									
DO NOT SCALE DRAWING									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[BEI Sensors:](#)

[1-172](#)