


M12-Splitters/T-Connectors

ASBS 2 M8-90 | ASBS 2 M12...-90



M12 Male to 2xM8 Female

Splitter/T-connector, with two M8 miniature female connectors, 3 poles, 90° with self-locking threaded joint.

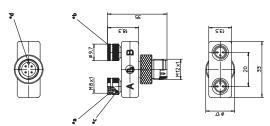


- ASBS 2 M8-90
- *a coupling nut black
- *b coupling nut nickel-plated
- *c O-Ring
- *d coding 90°



M12 Male to 2xM12 Female


Splitter/T-connector with two M12 female connectors, 4 and 5 poles, 90°-version, with self-locking threaded joint.

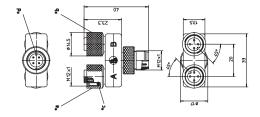


- ASBS 2 M12...-90
 - *a coupling nut black
 - *b coupling nut nickel-plated
 - *c O-Ring
 - *d coding 90°

Pin Assignments

Face Views		
ASBS 2 M8-90	Α	В
3	3 0 01	3 0 0 1
ASBS 2 M12-4S-90	Α	В
3	n.c. 5	n.c. 5 1
ASBS 2 M12-5-90	Α	В
1 5 2	3 0 0 0 0 2 5	3 4

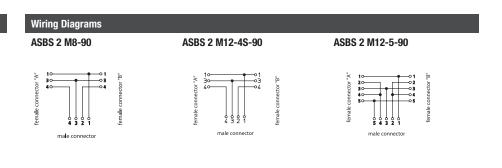

Be Certain with Belden



M12-Splitters/T-Connectors

ASBS 2 M8-90 | ASBS 2 M12...-90

Technical Data

Environmental

Degree of protection IP 67 / NEMA 6P

Operating temperature range -25°C (-13°F) / +90°C (+194°F)

Mechanical

Housing / Molded body TPU, self-extinguishing Female connectors: Insert

M8: TPU, self-extinguishing M12: PA GF, self-extinguishing

Male connector:

TPU, self-extinguishing Contact CuZn, pre-nickeled and

0.8 microns gold-plated

Coupling nut CuZn, nickel-plated

0-ring FKM

Electrical

Contact resistance \leq 5 m Ω

Nominal current at 40°C 2 A per outlet / 4 A max. total

M8: 60 V Nominal voltage

M12: 4 poles 240 V M12: 5 poles 60 V

Rated voltage M8: 63 V

M12: 4 poles 250 V M12: 5 poles 63 V

Test voltage M8: 1.0 kV eff. / 60 s

M12: 4 poles 2.0 kV eff. / 60 s

M12: 5 poles 1.0 kV eff. / 60 s

 $> 10^9 \, \Omega$ Insulation resistance Pollution degree

Part Number		Pins	Characteristics	
ASBS 2 M8-90		3		
	ASBS 2 M12-4S-90	4		
	ASBS 2 M12-5-90	5		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumberg Automation:

ASBS 2 M8-90