


0942 UEM 780



LioN-Link I/O module with 16 digital I/O channels, channels can be used universally as inputs or outputs, multipole cable interface to connect valve terminals, control consoles, manual tool changing devices, IP20 terminal boxes.

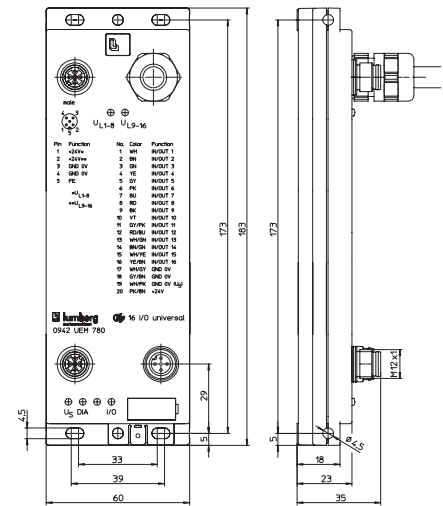


Bit	7	6	5	4	3	2	1	0
-----	---	---	---	---	---	---	---	---

M12 Output								
Byte 0	RD	BU	PK	GY	YE	GN	BN	WH
Byte 1	YE/BN	WH/YE	BN/GN	WH/GN	RD/BU	GY/PK	VT	BK

LED	Indication	Condition
I/O	red red flashing green	wrong configuration /module exchanged not recognized by the BusHead online, communication with BusHead
Us	green	sensor/system power supply
UL	green	actuator power supply
DIA	red	common indication for periphery faults

LioN-Link connection M12	Actuator connection M12
1 = Drain 2 = 24 V Sensor/System 3 = 0 V Sensor/System 4 = Data + 5 = Data -	1 = +24 V (UL 1-8) 2 = +24 V (UL 9-16) 3 = GND (0 V) 4 = GND (0 V) 5 = Earth

Be Certain with Belden



LioN-Link I/O Module with 16 Digital Inputs and Outputs

0942 UEM 780

Technical Data

Environmental

Degree of protection IP 67
Operating temperature range -10°C (+14°F) to +60°C (+140°F)

Mechanical

Weight 800 g (with 5 m cable)
Housing material PBT

System/sensors

power supply **Us**
Rated voltage 24 V DC
Voltage range 19–30 V DC
Power consumption 140 mA

Input power supply

Us
Voltage range min. (U_{System} – 1.5 V)
Sensor current 700 mA
Short circuit proof yes
Indication LED green

Input wiring

Type 3 acc. to IEC 61131-2
Rated input voltage 24 V DC
Channel type N.O. p-switching
Number of digital channels max. 16

Output power supply

UL
Rated voltage 24 V DC
Voltage range 19–30 V DC
Reverse polarity protection yes/antiparallel diode
Indication LED green

Output wiring

Rated output current 0.5 A per channel
Short circuit proof yes
Max. output current 6 A (3 A per group)
Group 1 Channel 1–8
Group 2 Channel 9–16
Overload proof yes
Number of digital channels max. 16
Channel type N.O. p-switching

Diagnostic

Periphery fault diagnosis for sensor short circuit, actuator short circuit, sensor low voltage detection.

Part Number

0942 UEM 780/5 M



The application of these products in harsh environments should always be checked before use.
Specifications subject to alteration.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lumberg Automation:](#)

[0942 UEM 780/5 M](#)