

# Features

## Regulated Converter

- Long 5 year warranty
- 2MOPP/250VAC
- Suitable for built in Class II applications
- Wide input voltage range (85-264VAC)
- Low leakage current (<75µA)
- 5000m operation
- Active power factor correction

**RECOM**  
AC/DC Converter

## RACM100

**100 Watt  
Enclosed &  
Open Frame  
Case Style  
Single Output**



### Description

The RACM100 is a compact 3" x 2" high efficiency AC/DC power supply with 2xMOPP 3rd Ed. safety approval for medical applications. The range has now been extended to include open frame models (/OF suffix). Like the original enclosed versions, the RACM100/OF series are space-saving universal input voltage power supplies (85-264VAC), with 4kVAC isolation, PFC, no minimum load and can be used at ambient temperatures of between -25°C and +85°C. The 12V, 15V, 24V or 48V output voltages are fully protected and have tolerances of less than ±0.2% over the entire input voltage range and less than ±0.5% over the entire load range. The RACM100/OF series is certified to medical safety standard IEC/ES/EN-60601-1 3rd Edition and feature BF rated outputs with less than 75µA leakage current. It has a built-in Class B EMI filter and comes with a five year warranty.

### Selection Guide

Part Number	Input Voltage Range [VAC]	Output Voltage [VDC]	Output Current [A]	Input Power @ No Load [W]	Efficiency typ. [%]	Max. Capacitive Load <sup>(1)</sup> [µF]
RACM100-12S <sup>(1)</sup>	85-264	12	8.34	0.3	91	6950
RACM100-15S <sup>(1)</sup>	85-264	15	6.67	0.3	92	4450
RACM100-24S <sup>(1)</sup>	85-264	24	4.17	0.3	92	1750
RACM100-48S <sup>(1)</sup>	85-264	48	2.09	0.3	91	430

#### Notes:

Note1: Max Cap Load is tested at minimum input and full resistive load



### Model Numbering



#### Notes:

Note2: without suffix, standard enclosed case  
add suffix **"/OF"** for open frame style

#### Examples:

RACM100-12S = 12Vout, standard enclosed case  
RACM100-24S/OF = 24Vout, open frame style




IEC/EN60601 certified  
ANSI/AAMI ES60601 certified  
EN55011 certified  
CISPR11  
FCC Part 15

Specifications (measured @ Ta= 25°C, 250VAC, full load and after warm-up)


### BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage		85VAC 120VDC		264VAC 370VDC
Input Current	115VAC, full load 230VAC, full load			1.15A 0.55A
Inrush Current	cold start, 230VAC			60A
No load Power Consumption				0.11W
Input Frequency Range	AC Input	47Hz		63Hz
Output Voltage Trimming			±10.0%	
Minimum Load		0%		
Power Factor		0.95		
Start-up Time				1s
Rise Time			20ms	
Hold up Time	115VAC, full load	16ms		
Internal Operating Frequency			60kHz	
Output Ripple and Noise (measured @ 20MHz BW)	12VDC, with 10μF/25V MLCC 15VDC, with 10μF/25V MLCC 24VDC, with 1μF/50V MLCC 48VDC, with 0.1μF/100V MLCC		120mVp-p 150mVp-p 160mVp-p 340mVp-p	


Efficiency vs. Load

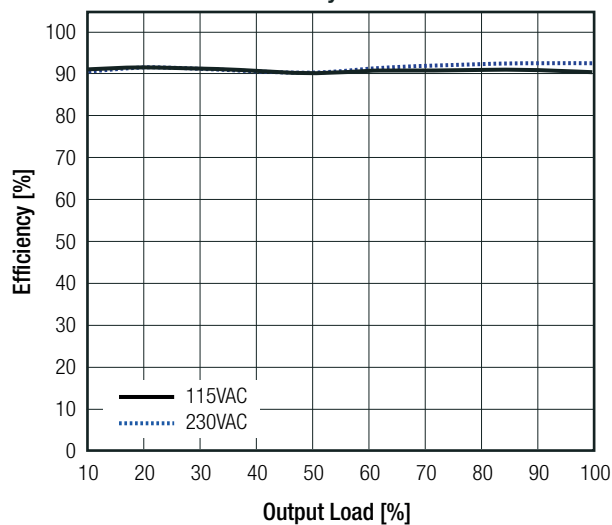


Efficiency vs. Input Voltage

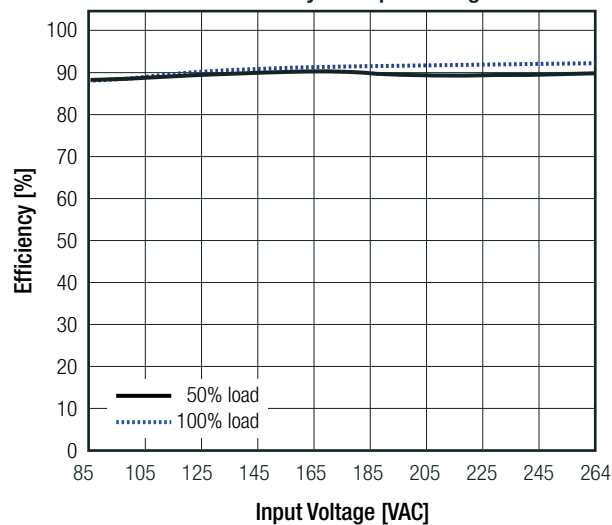

Line Derating

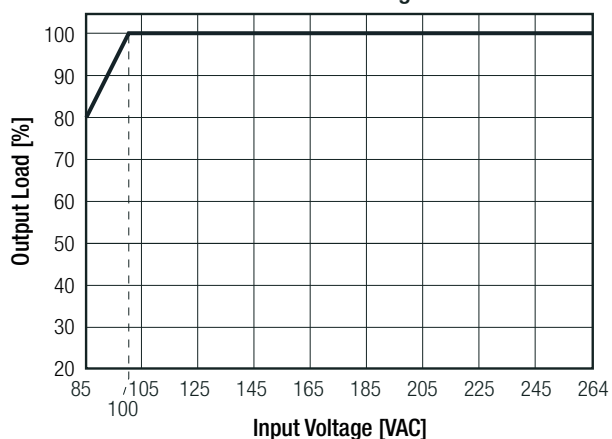

Power Factor vs. Load

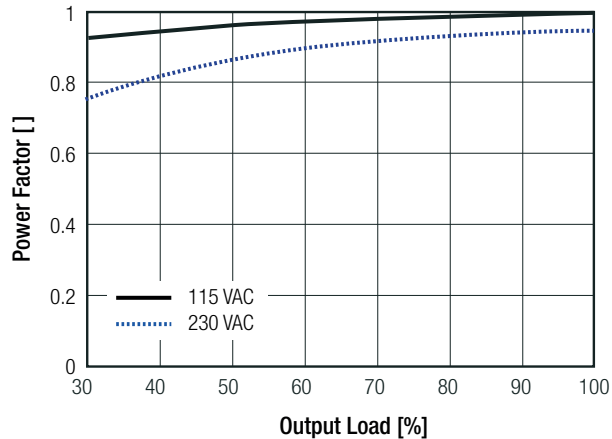

### Specifications (measured @ Ta= 25°C, 250VAC, full load and after warm-up)

#### REGULATIONS

Parameter	Condition	Value
Output Accuracy	230VAC, full load	±1.0%
Line Regulation	low line to high line, full load	±0.2%
Load Regulation	0% to 100% load	0.5% max.
	10% to 100% load	0.4% max.
Transient Peak Deviation	load step from 50% - 75% change at 2.5A/μs	3.0% Vout max.
Transient Recovery Time	load step from 50% - 75% change at 2.5A/μs	500μs typ.

#### PROTECTIONS

Parameter	Condition		Value
Input Fuse	internal line and neutral		T3.15A / 250VAC, slow blow type
Short Circuit Protection (SCP)			continuous, auto-recovery
Over Load Protection (OLP)	% of lout rated (Hiccup)		115% min. / 150% max.
Over Voltage Protection (OVP)	% of Vout nominal (Latch off)		115% min. / 135% max.
Isolation Voltage <sup>(6)</sup>	tested for 1 minute	I/P to O/P	4kVAC
		I/P to Case	1.5kVAC
		O/P to Case	1.5kVAC
Isolation Resistance	500VDC		100MΩ min.
Insulation Grade			reinforced
Leakage Current	264VAC		75μA max.
Means of Protection	working voltage 250VAC/continuous		2MOPP
Medical Device Classification			built-in power supply
Internal	clearance		>8.0mm
	creepage		>8.0mm

#### Notes:

Note5: For repeat Hi-Pot testing, reduce the time and/or the test voltage

#### ENVIRONMENTAL



Parameter	Condition		Value
Operating Temperature Range	refer to "Derating Graph"		-25°C to +85°C
	full load, 230VAC	enclosed	-25°C to +60°C
		open frame	-25°C to +55°C
Temperature Coefficient			±0.02%/K
Operating Altitude			5000m max.
Operating Humidity	non-condensing		5% to 95% RH
Pollution Degree			PD2
High Temperature Operating Life (HTLO)			JEDEC JESD22-A108
Shock			IEC60068-2-27
Vibration			IEC60068-2-6
MTBF	according to MIL-HDBK-217F, full load, +25°C		790.3 x 10 <sup>3</sup> hours

continued on next page

**Specifications** (measured @ Ta= 25°C, 250VAC, full load and after warm-up)

### Derating Graph

(@ Chamber and natural convection 0.1m/s)

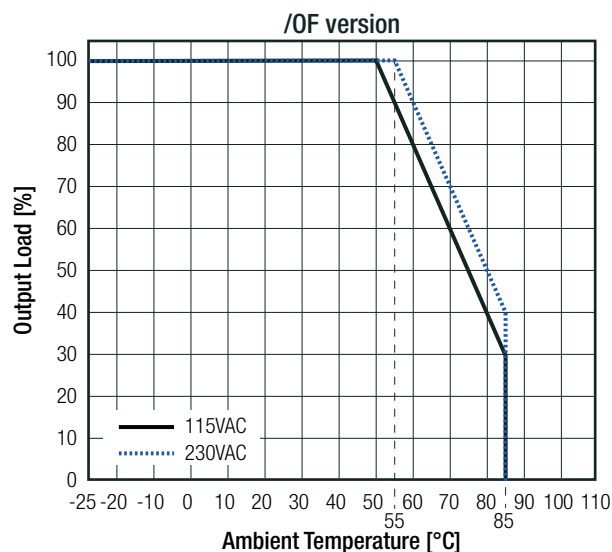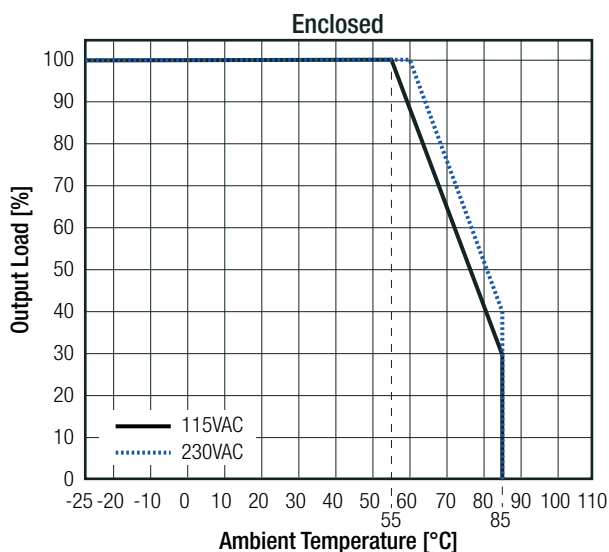

### SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
Medical Electric Equipment, General Requirements for Safety and Essential Performance	E314885	CAN/CSA-C22.2 No. 60601-1:14 ANSI/AAMI ES60601-1:2005 + A2:2010
Medical Electric Equipment, General Requirements for Safety and Essential Performance (CB)	181200102	IEC60601-1:2005 + A1:2012, 3rd Edition
Medical Electric Equipment, General Requirements for Safety and Essential Performance		EN60601-1:2006 +12:2014
Information Technology Equipment - General Requirements for Safety (LVD)	TW1708008-001	EN60950-1:2006 + A2:2013
Information Technology Equipment - General Requirements for Safety		IEC60950-1:2005, 2nd Edition + A2:2013
EAC	RU-AT.49.09571	TP TC 004/2011 TP TC 004/2011
RoHS2		RoHS-2011/65/EU + AM-2015/863

EMC Compliance (Medical)	Conditions	Standard / Criterion
Medical electrical equipment - Part 1-2: General requirements for basic safety and essential performance - Collateral standard: Electromagnetic compatibility - Requirements and tests		EN60601-1-2:2015
Industrial, scientific and medical equipment – Radio frequency disturbance characteristics – Limits and methods of measurement		EN55011:2009 + A1:2010 Class B Conducted, Class A Radiated
Industrial, scientific and medical equipment - Radio frequency disturbance characteristics - Limits and methods of measurement		CISPR11:2009 + A1:2010 Class B Conducted, Class A Radiated
ESD Electrostatic discharge immunity test	Air ±15kV; Contact ±8kV	IEC61000-4-2:2008
Radiated, radio-frequency, electromagnetic field immunity test	10V/m (80-2700MHz) 27V/m (385MHz) 28V/m (450MHz)	IEC61000-4-3:2006 + A2:2010
Fast Transient and Burst Immunity	AC Power Port: ±2kV	IEC61000-4-4:2012
Surge Immunity	AC Port: L-N= ±1kV L-GND= ±2kV	IEC61000-4-5:2005
Immunity to conducted disturbances, induced by radio-frequency fields	6Vr.m.s	IEC61000-4-6:2013
Power Frequency Magnetic Field	50Hz, 30A/m	IEC61000-4-8:2009
Voltage Dips and Interruptions	Dips: >95%; 30%; Interruptions >95%	IEC61000-4-11:2004
Limits of Harmonic Current Emissions		EN61000-3-2:2005 + A2:2009, Class D
Limits of Voltage Fluctuations and Flicker		EN61000-3-3:2013

continued on next page

### Specifications (measured @ Ta= 25°C, 250VAC, full load and after warm-up)

EMC Compliance (Industrial)	Conditions	Standard / Criterion
Limitations on the amount of electromagnetic interference allowed from digital & electronic devices		47CFR FCC Part 15 Subpart B, Class B
Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		ANSI C63.4:2014
Electromagnetic compatibility of multimedia equipment – Emission Requirements		EN55032:2015+AC:2013, Class B
Information technology equipment - Immunity characteristics - Limits and methods of measurement		EN55024:2010+A1:2015
ESD Electrostatic discharge immunity test	Air $\pm 8\text{kV}$ ; Contact $\pm 6\text{kV}$	IEC61000-4-2:2008, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	3V/m (80-1000MHz) 20V/m (80-1000MHz) 3V/m (1-2.5GHz) 10V/m (1-2.5GHz)	IEC61000-4-3:2006 + A2:2010, Criteria A
Fast Transient and Burst Immunity	DC Port: $\pm 2\text{kV}$	IEC61000-4-4:2012, Criteria A
Surge Immunity	DC Port: $\pm 1\text{kV}$	IEC61000-4-5:2014, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	DC Power Port 3V + 20V	IEC61000-4-6:2013, Criteria A
Power Frequency Magnetic Field	50Hz/60Hz 1A/m 50Hz/60Hz 10A/m	IEC61000-4-8:2009, Criteria A
Voltage Dips and Interruptions	Dips: >95%; 60%; 30% Interruptions >95%	IEC61000-4-11:2004, Criteria A IEC61000-4-11:2004, Criteria B
Limits of Harmonic Current Emissions		EN61000-3-2:2014, Class D
Limits of Voltage Fluctuations and Flicker		EN61000-3-3:2013

### DIMENSION and PHYSICAL CHARACTERISTICS


Parameter	Type	Value
Material	enclosed	aluminum
Dimension (LxWxH)	enclosed	91.4 x 62.0 x 39.2mm
	open frame	76.2 x 50.8 x 32.0mm
Weight	enclosed	210g
	open frame	150g

continued on next page

Specifications (measured @ Ta= 25°C, 250VAC, full load and after warm-up)

Dimension Drawing Enclosed (mm)


Top View

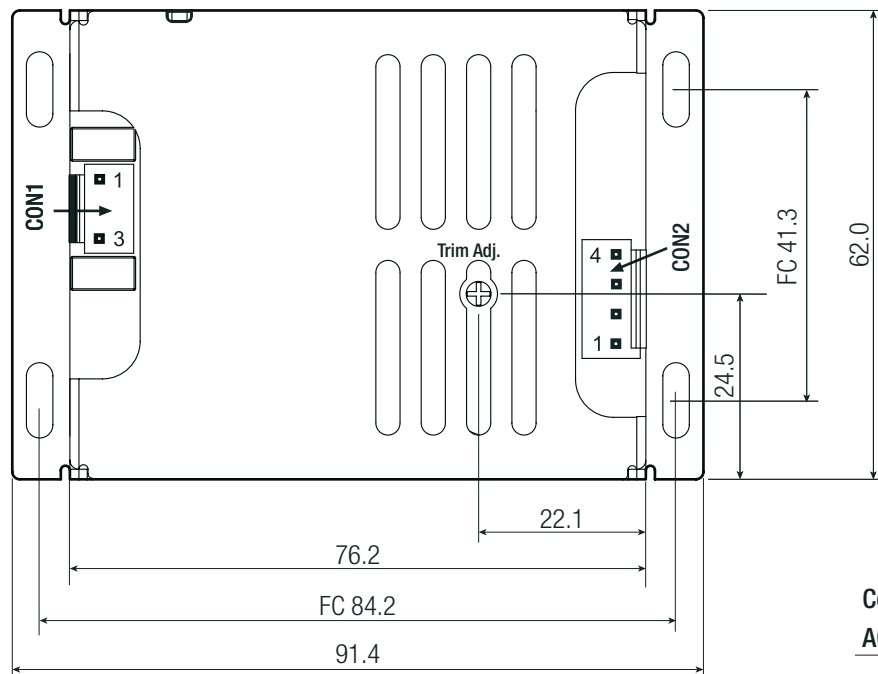

Side View



Bottom View

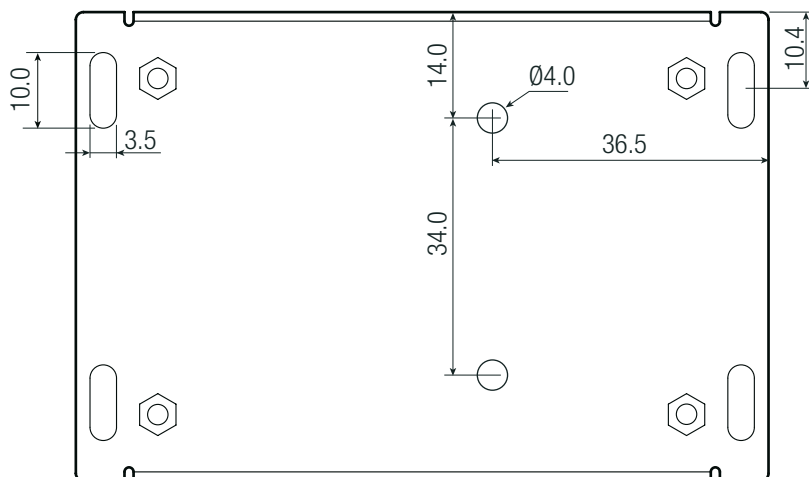

Connection via Connector

AC Input (CON1)

Pin #	Pin Header
1 AC/L	SVH-21T-P1.1
3 AC/N	

DC Output Connector (CON2)


Pin #	Pin Header
1,2 -Vout	SVH-21T-P1.1
3,4 +Vout	

FC= fixing centers  
Crimp Terminal AWG Range: 18-22AWG  
Tolerance: ±0.5mm


continued on next page

### Specifications (measured @ Ta= 25°C, 250VAC, full load and after warm-up)

### Dimension Drawing Open Frame (mm)



### Top View

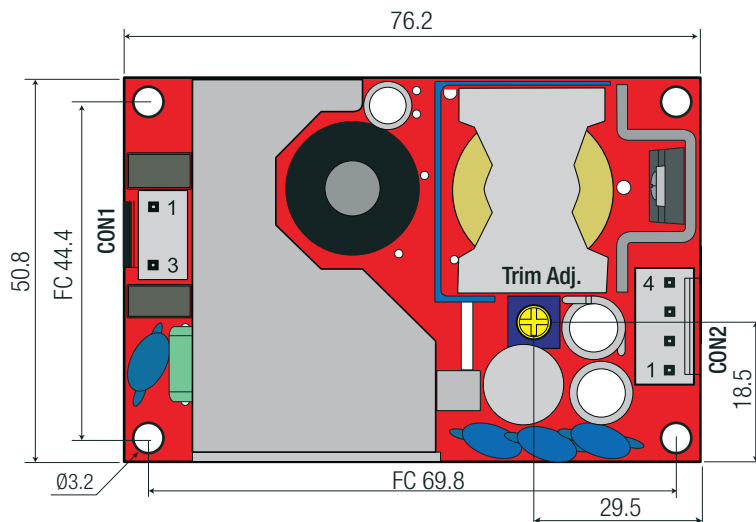

### Connection via Connector

### AC Input (CON1)

Pin #	Pin Header
1 AC/L	SVH-21T-P1.1
3 AC/N	

### DC Output Connector (CON2)


Pin #	Pin Header
1,2 -Vout	SVH-21T-P1.1
3,4 +Vout	

FC= fixing centers

Crimp Terminal AWG Range: 18-22AWG

Tolerance:  $\pm 0.5\text{mm}$

### Side View

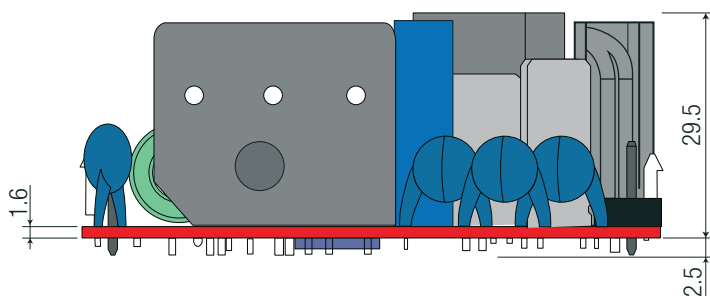

## PACKAGING INFORMATION

Parameter	Type		Value
Packaging Dimension (LxWxH)	cardboard box	enclosed case	418.0 x 258.0 x 105.0mm
		open frame	494.0 x 250.0 x 95.0mm
Packaging Quantity	enclosed case		10pcs
	open frame		25pcs
Storage Temperature Range			-40°C to +85°C
Storage Humidity	non-condensing		5% to 95% RH

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[RACM100-48S](#) [RACM100-15S](#) [RACM100-12S](#) [RACM100-24S](#) [RACM100-48S/OF](#) [RACM100-12S/OF](#) [RACM100-15S/OF](#) [RACM100-24S/OF](#)