

# Features

## Regulated Converter

- 4:1 wide input voltage range
- 1.6kVDC isolation
- UL certified
- Efficiency up to 90%
- Six-sided continuous shield
- No minimum load required

**RECOM**  
DC/DC Converter

## RP20-AW

20 Watt

1" x 1"

Single and Dual Output



### Description

The RP20-AW series are ultraminiature wide input voltage range power DC/DC converters in a case half the size of industry standard 20W converters. Despite their small size, the RP20-AW converters are fully specified devices with output currents up to 4.5 Amps, up to 90% efficiency, no minimum load, 1600VDC isolation, a built-in Class A EMC filter and low ripple/noise figures. The outputs are also fully protected against short circuits, overcurrent and overvoltage. The no load input current is particularly low (only 4mA/6mA). The RP20-AW series will find many uses in applications where board space and/or board height is at a premium or in battery-powered systems where standby current is important.

### Selection Guide

| Part Number                    | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [mA] | Input <sup>(1)</sup> Current [mA] | Efficiency <sup>(1)</sup> typ. [%] | Max. Capacitive Load <sup>(2)</sup> [μF] |
|--------------------------------|---------------------------|----------------------|---------------------|-----------------------------------|------------------------------------|------------------------------------------|
| RP20-243.3SAW <sup>(3,4)</sup> | 9-36                      | 3.3                  | 4500                | 695                               | 89                                 | 7000                                     |
| RP20-2405SAW <sup>(3,4)</sup>  | 9-36                      | 5                    | 4000                | 936                               | 89                                 | 5000                                     |
| RP20-2412SAW <sup>(3,4)</sup>  | 9-36                      | 12                   | 1670                | 938                               | 89                                 | 850                                      |
| RP20-2415SAW <sup>(3,4)</sup>  | 9-36                      | 15                   | 1330                | 934                               | 89                                 | 700                                      |
| RP20-483.3SAW <sup>(3,4)</sup> | 18-75                     | 3.3                  | 4500                | 356                               | 87                                 | 7000                                     |
| RP20-4805SAW <sup>(3,4)</sup>  | 18-75                     | 5                    | 4000                | 468                               | 89                                 | 5000                                     |
| RP20-4812SAW <sup>(3,4)</sup>  | 18-75                     | 12                   | 1670                | 469                               | 89                                 | 850                                      |
| RP20-4815SAW <sup>(3,4)</sup>  | 18-75                     | 15                   | 1330                | 462                               | 90                                 | 700                                      |
| RP20-2412DAW <sup>(3,4)</sup>  | 9-36                      | ±12                  | ±833                | 936                               | 89                                 | ±500                                     |
| RP20-2415DAW <sup>(3,4)</sup>  | 9-36                      | ±15                  | ±667                | 926                               | 90                                 | ±350                                     |
| RP20-4812DAW <sup>(3,4)</sup>  | 18-75                     | ±12                  | ±833                | 468                               | 89                                 | ±500                                     |
| RP20-4815DAW <sup>(3,4)</sup>  | 18-75                     | ±15                  | ±667                | 463                               | 90                                 | ±350                                     |

#### Notes:

- Note1: Maximum values at nominal input voltage and full load  
Note2: Max. Cap load is tested at minimum Input and constant resistive load




CAL US  
E196683



UL60950-1 certified

### Model Numbering

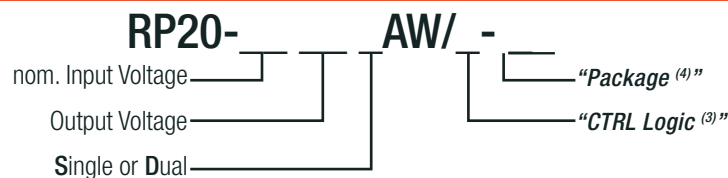

#### Notes:

- Note3: standard part is without suffix "P" or "N" = without CTRL & Trim function  
Trim function is only available for single output with /P or /N suffix  
add suffix "P" for CTRL function with positive logic (1=ON, 0=OFF), including trim pin  
add suffix "N" for CTRL function with negative logic (0=ON, 1=OFF), including trim pin  
Note4: add suffix "-HC" for premounted Heat-sink with clamps

#### Ordering Examples

RP20-2405SAW/P = 24V input, 5V output, single, positive Logic CTRL pin  
RP20-4812DAW-HC = 48V input, ±12V output, dual, without CTRL pin, Heat-sink premounted

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

## BASIC CHARACTERISTICS



| Parameter                                                   | Condition                                               |                                      | Min.                                                                                     | Typ.                | Max.             |
|-------------------------------------------------------------|---------------------------------------------------------|--------------------------------------|------------------------------------------------------------------------------------------|---------------------|------------------|
| Internal Input Filter                                       |                                                         |                                      | Pi-Type                                                                                  |                     |                  |
| Input Voltage Range                                         | nom. Vin = 24VDC<br>nom. Vin = 48VDC                    |                                      | 9VDC<br>18VDC                                                                            | 24VDC<br>48VDC      | 36VDC<br>75VDC   |
| Input Surge Voltage                                         | 1s max.                                                 | nom. Vin = 24VDC<br>nom. Vin = 48VDC |                                                                                          |                     | 50VDC<br>100VDC  |
| Under Voltage Lockout (UVLO)                                | nom. Vin = 24VDC                                        | DC-DC ON<br>DC-DC OFF                |                                                                                          | 8VDC                | 9VDC             |
|                                                             | nom. Vin = 48VDC                                        | DC-DC ON<br>DC-DC OFF                |                                                                                          | 16VDC               | 18VDC            |
| Output Voltage Trimming                                     | refer to <b>"OUTPUT VOLTAGE TRIMMING"</b>               |                                      | -10%                                                                                     |                     | +10%             |
| Minimum Load                                                |                                                         |                                      | 0%                                                                                       |                     |                  |
| Start-up Time                                               | Power up<br>ON/OFF CTRL                                 |                                      |                                                                                          |                     | 30ms<br>30ms     |
| ON/OFF CTRL <sup>(5)</sup><br>refer to <b>"ON/OFF CTRL"</b> | Positive Logic                                          | DC-DC ON<br>DC-DC OFF                | Open or 3.0VDC < V <sub>CTRL</sub> < 15VDC<br>Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC |                     |                  |
|                                                             | Negative Logic                                          | DC-DC ON<br>DC-DC OFF                | Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC<br>Open or 3.0VDC < V <sub>CTRL</sub> < 15VDC |                     |                  |
| Input Current of CTRL pin                                   | drive current                                           | I <sub>CTRL</sub>                    | -0.5mA                                                                                   |                     | +1.0mA           |
| Standby Current                                             | DC-DC OFF                                               | I <sub>in</sub>                      |                                                                                          | 2mA                 |                  |
| Internal Operating Frequency                                | 3.3Vout, 5Vout<br>Others                                |                                      | 248kHz<br>297kHz                                                                         | 275kHz<br>330kHz    | 303kHz<br>363kHz |
| Output Ripple and Noise                                     | measured at 20MHz BW<br>with a 1μF M/C X7R and 10μF T/C |                                      | Single                                                                                   | 75mVp-p             |                  |
|                                                             |                                                         |                                      | Dual                                                                                     | 100mVp-p            |                  |
| Input Reflected Ripple Current <sup>(6)</sup>               |                                                         |                                      |                                                                                          | 30mA <sub>p-p</sub> |                  |

### Notes:

Note5: If no suffix is specified, the control pin will be omitted. If fitted, the ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin pin

Note6: Simulated source impedance of 12μH. 12μH inductor in series with +Vin



## RP20-2405SAW

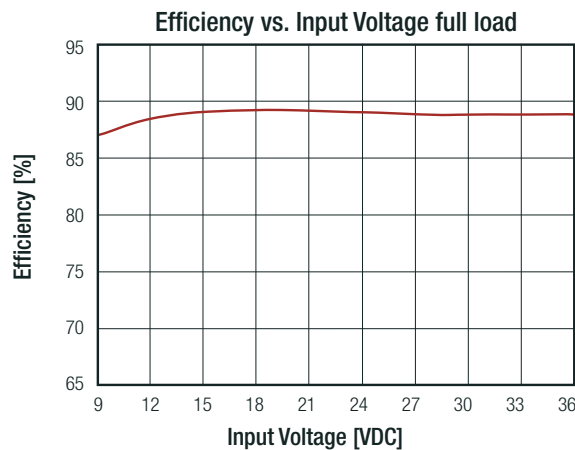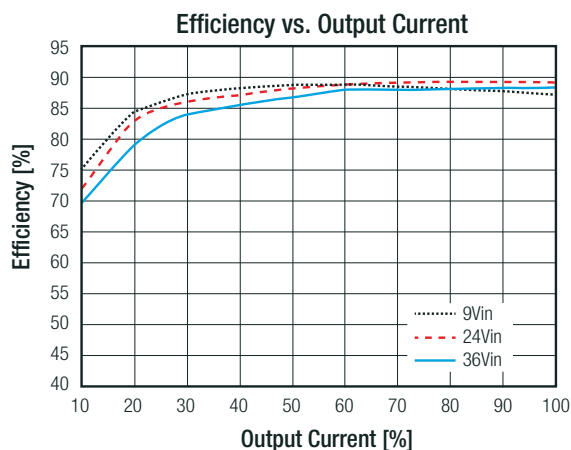

continued on next page

**Specifications** (measured @  $T_a = 25^\circ\text{C}$ , nom. Vin, full load unless otherwise stated)


### RP20-4805SAW

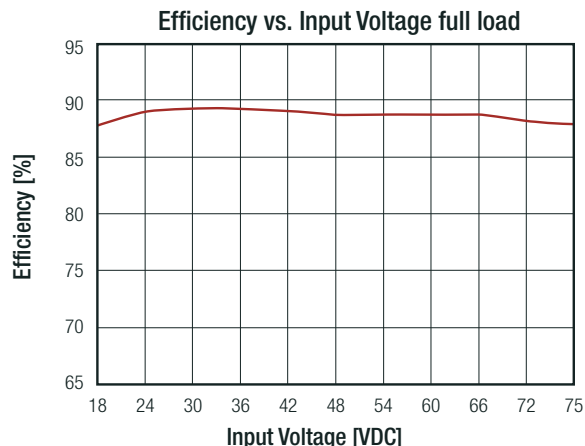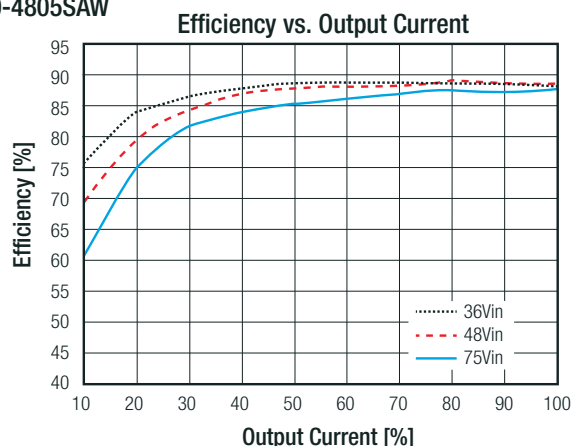

### OUTPUT VOLTAGE TRIMMING

#### Output Voltage Trimming

Single output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

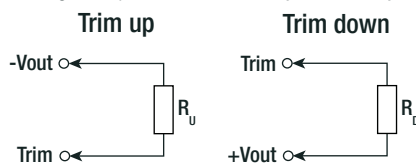

#### RP20-xx3.3SAW

|           |         |         |         |        |        |        |        |        |        |        |               |
|-----------|---------|---------|---------|--------|--------|--------|--------|--------|--------|--------|---------------|
| Trim up   | 1       | 2       | 3       | 4      | 5      | 6      | 7      | 8      | 9      | 10     | [%]           |
| Vout =    | 3.333   | 3.366   | 3.399   | 3.432  | 3.465  | 3.498  | 3.531  | 3.564  | 3.597  | 3.63   | [VDC]         |
| $R_u =$   | 385.071 | 191.511 | 126.990 | 94.730 | 75.374 | 62.470 | 53.253 | 46.340 | 40.963 | 36.662 | [k $\Omega$ ] |
| Trim down | 1       | 2       | 3       | 4      | 5      | 6      | 7      | 8      | 9      | 10     | [%]           |
| Vout =    | 3.267   | 3.234   | 3.201   | 3.168  | 3.135  | 3.102  | 3.069  | 3.036  | 3.003  | 2.97   | [VDC]         |
| $R_d =$   | 116.719 | 54.779  | 34.133  | 23.810 | 17.616 | 13.486 | 10.537 | 8.325  | 6.604  | 5.228  | [k $\Omega$ ] |

#### RP20-xx05SAW

|           |         |         |        |        |        |        |        |        |        |        |               |
|-----------|---------|---------|--------|--------|--------|--------|--------|--------|--------|--------|---------------|
| Trim up   | 1       | 2       | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | [%]           |
| Vout =    | 5.05    | 5.10    | 5.15   | 5.20   | 5.25   | 5.30   | 5.35   | 5.4    | 5.45   | 5.50   | [VDC]         |
| $R_u =$   | 253.450 | 125.700 | 83.117 | 61.825 | 49.050 | 40.533 | 34.450 | 29.888 | 26.339 | 23.500 | [k $\Omega$ ] |
| Trim down | 1       | 2       | 3      | 4      | 5      | 6      | 7      | 8      | 9      | 10     | [%]           |
| Vout =    | 4.95    | 4.90    | 4.85   | 4.80   | 4.75   | 4.70   | 4.65   | 4.60   | 4.55   | 4.50   | [VDC]         |
| $R_d =$   | 248.340 | 120.590 | 78.007 | 56.715 | 43.940 | 35.423 | 29.340 | 24.778 | 21.229 | 18.390 | [k $\Omega$ ] |

#### RP20-xx12SAW


|           |         |         |         |         |         |         |        |        |        |        |               |
|-----------|---------|---------|---------|---------|---------|---------|--------|--------|--------|--------|---------------|
| Trim up   | 1       | 2       | 3       | 4       | 5       | 6       | 7      | 8      | 9      | 10     | [%]           |
| Vout =    | 12.12   | 12.24   | 12.36   | 12.48   | 12.60   | 12.72   | 12.84  | 12.96  | 13.08  | 13.20  | [VDC]         |
| $R_u =$   | 203.223 | 99.057  | 64.334  | 46.973  | 36.557  | 29.612  | 24.652 | 20.932 | 18.038 | 15.723 | [k $\Omega$ ] |
| Trim down | 1       | 2       | 3       | 4       | 5       | 6       | 7      | 8      | 9      | 10     | [%]           |
| Vout =    | 11.88   | 11.76   | 11.64   | 11.52   | 11.40   | 11.28   | 11.16  | 11.04  | 10.92  | 10.8   | [VDC]         |
| $R_d =$   | 776.557 | 380.723 | 248.779 | 182.807 | 143.223 | 116.834 | 97.985 | 83.848 | 72.853 | 64.057 | [k $\Omega$ ] |

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

| RP20-xx15SAW       |         |         |         |         |         |         |         |        |        |        |       |
|--------------------|---------|---------|---------|---------|---------|---------|---------|--------|--------|--------|-------|
| Trim up            | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8      | 9      | 10     | [%]   |
| V <sub>out</sub> = | 15.15   | 15.3    | 15.45   | 15.60   | 15.75   | 15.90   | 16.05   | 16.20  | 16.35  | 16.50  | [VDC] |
| R <sub>u</sub> =   | 161.557 | 78.223  | 50.446  | 36.557  | 28.223  | 22.668  | 18.700  | 15.723 | 13.409 | 11.557 | [kΩ]  |
| Trim down          | 1       | 2       | 3       | 4       | 5       | 6       | 7       | 8      | 9      | 10     | [%]   |
| V <sub>out</sub> = | 14.85   | 14.70   | 14.55   | 14.40   | 14.25   | 14.10   | 13.95   | 13.80  | 13.65  | 13.50  | [VDC] |
| R <sub>d</sub> =   | 818.223 | 401.557 | 262.668 | 193.223 | 151.557 | 123.779 | 103.938 | 89.057 | 77.483 | 68.223 | [kΩ]  |

**ON/OFF CTRL**

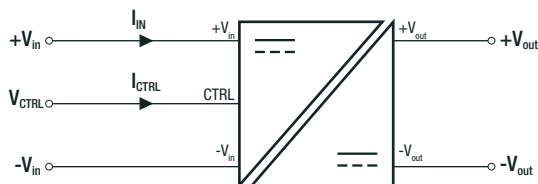

|                       |                       |                                                                                          |
|-----------------------|-----------------------|------------------------------------------------------------------------------------------|
| <b>Positive Logic</b> | DC-DC ON<br>DC-DC OFF | Open or 3.0VDC < V <sub>CTRL</sub> < 15VDC<br>Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC |
| <b>Negative Logic</b> | DC-DC ON<br>DC-DC OFF | Short or 0VDC < V <sub>CTRL</sub> < 1.2VDC<br>Open or 3.0VDC < V <sub>CTRL</sub> < 15VDC |

**REGULATIONS**

| Parameter                        | Condition                           |                | Value          |
|----------------------------------|-------------------------------------|----------------|----------------|
| Output Accuracy                  |                                     |                | ±1.0%          |
| Line Regulation                  | low line to high line,<br>full load | Single         | ±0.2%          |
|                                  |                                     | Dual           | ±0.5%          |
| Load Regulation                  | 0% to 100% load                     | Single         | ±0.2%          |
|                                  |                                     | Dual           | ±1.0%          |
|                                  | 10% to 90% load                     | Single<br>Dual | ±0.1%<br>±0.8% |
| Cross Regulation                 | asymmetrical 25%<>100% load         |                | ±5.0%          |
| Transient Response Recovery Time | 25% load step change                |                | 250μs typ.     |

**PROTECTIONS**

| Parameter                        | Condition                   |         | Value                          |
|----------------------------------|-----------------------------|---------|--------------------------------|
| Short Circuit Protection (SCP)   |                             |         | continuous, automatic recovery |
| Over Voltage Protection (OVP)    | zener diode clamp           | 3.3Vout | 3.7 - 5.4VDC                   |
|                                  |                             | 5Vout   | 5.6 - 7.0VDC                   |
|                                  |                             | 12Vout  | 13.5 - 19.6VDC                 |
|                                  |                             | 15Vout  | 16.8 - 20.5VDC                 |
| Over Load Protection (OLP)       | % of I <sub>out</sub> rated |         | 150% typ., Hiccup mode         |
| Isolation Voltage <sup>(8)</sup> | I/P to O/P                  |         | 1.6kVDC/ 1 minute              |
|                                  | I/P to O/P to case          |         | 1.0kVDC/ 1 minute              |
| Isolation Resistance             | Viso= 500VDC                |         | 1GΩ min                        |
| Isolation Capacitance            |                             |         | 1500pF max.                    |

**Notes:**

Note7: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note8: This power module is not internally fused. An input line fuse must always be used



Recom suggests: 24Vin= T4A; 48Vin= T2A slow blow typesv

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

### ENVIRONMENTAL

| Parameter                   | Condition                   |                                       | Value                        |
|-----------------------------|-----------------------------|---------------------------------------|------------------------------|
| Operating Temperature Range | without derating            |                                       | -40°C to +68°C               |
|                             | with derating               |                                       | -40°C to +101°C              |
| Maximum Case Temperature    |                             |                                       | +105°C                       |
| Temperature Coefficient     |                             |                                       | ±0.02%/K max.                |
| Thermal Impedance           | @ natural convection 0.1m/s | without heat-sink                     | 17.6K/W                      |
|                             |                             | with heat-sink                        | 14.8K/W                      |
| Operating Humidity          | non-condensing              |                                       | 5% - 95% RH                  |
| Thermal Shock               |                             |                                       | according to MIL-STD-810F    |
| Vibration                   |                             |                                       | according to MIL-STD-810F    |
| MTBF                        | +25°C                       | according to MIL-HDBK-217F, G.B.      | 1469 x 10 <sup>3</sup> hours |
|                             |                             | Bellcore TR-NWT-000332 <sup>(9)</sup> | 1766 x 10 <sup>3</sup> hours |

### Derating Graph <sup>(10)</sup>

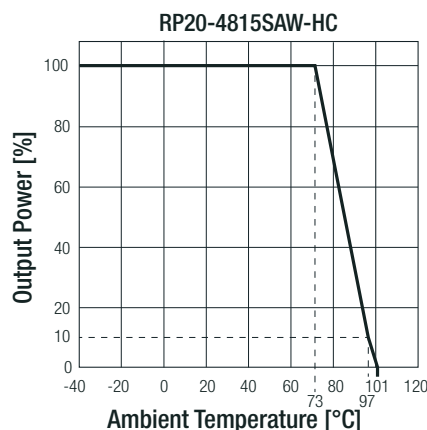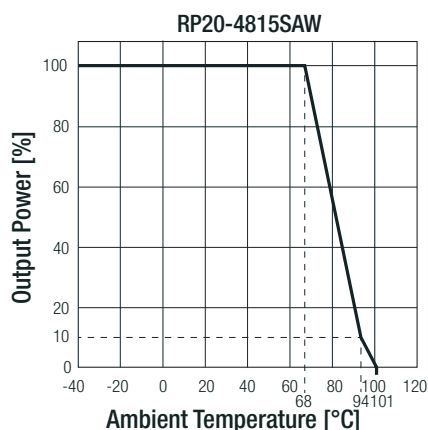

**Notes:**

Note9: BELLCORE TR-NWT-000332. Case I: 50% Stress, Ta= 40°C. MIL-HDBK 217F Notice 2. Ta = 25°C, full load, (controlled environment)

Note10: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact RECOM Techsupport for detailed information

### SAFETY AND CERTIFICATIONS

| Certificate Type (Safety)                                         | Condition      | Standard                                                                        |
|-------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------|
| Information Technology Equipment, General Requirements for Safety | E196683        | UL60950-1, 1st Edition, 2007<br>CAN/CSA-C22.2 No. 60950-1-03, 1st Edition, 2006 |
| EAC                                                               | RU-AT.49.09571 | TP TC 004/2011                                                                  |
| RoHS 2                                                            |                | RoHS-2011/65/EU + AM-2015/863                                                   |

| EMC Compliance                                                                | Condition                                       | Standard / Criterion                 |
|-------------------------------------------------------------------------------|-------------------------------------------------|--------------------------------------|
| Electromagnetic compatibility of multimedia equipment - Emission requirements | without external filter<br>with external filter | EN55032, Class A<br>EN55032, Class B |
| ESD Electrostatic discharge immunity test                                     | Air ±8kV and Contact ±6kV                       | EN61000-4-2, Criteria A              |
| Radiated, radio-frequency, electromagnetic field immunity test                | 10 V/m                                          | EN61000-4-3, Criteria A              |
| Fast Transient and Burst Immunity <sup>(11)</sup>                             | ±2kV                                            | EN61000-4-4, Criteria A              |
| Surge Immunity <sup>(11)</sup>                                                | ±2kV                                            | EN61000-4-5, Criteria A              |
| Immunity to conducted disturbances, induced by radio-frequency fields         | 10 Vr.m.s                                       | EN61000-4-6, Criteria A              |
| Power Magnetic Field Immunity                                                 | 100A/m continuous; 1000A/m 1s                   | EN61000-4-8, Criteria A              |


**Notes:**

Note11: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5  
Recom suggests Nippon chemi-con KY series 220µF/100V

continued on next page

### Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

#### EMC Filtering Suggestions according to EN55032

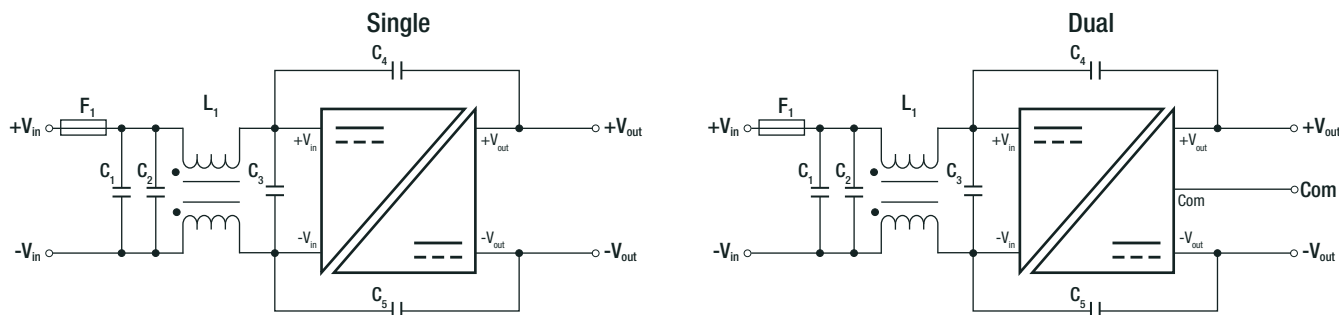


#### Component List Class B

| MODEL                         | C1                      | C2                      | C3                      | C4/C5                  | L1                                            |
|-------------------------------|-------------------------|-------------------------|-------------------------|------------------------|-----------------------------------------------|
| RP20-24xxSAW,<br>RP20-24xxDAW | 4.7µF/25V<br>1812 MLCC  | N/A                     | N/A                     | 470pF/2kV<br>1808 MLCC | CMC: 325µH<br>ref.: WE 744290321 ref.: CMC-06 |
| RP20-48xxSAW,<br>RP20-48xxDAW | 2.2µF/100V<br>1812 MLCC | 2.2µF/100V<br>1812 MLCC | 2.2µF/100V<br>1812 MLCC | 470pF/2kV<br>1808 MLCC | CMC: 325µH<br>ref.: WE 744290321 ref.: CMC-06 |

#### DIMENSIONS AND PHYSICAL CHARACTERISTICS

| Parameter          | Type                                | Value                                                 |
|--------------------|-------------------------------------|-------------------------------------------------------|
| Material           | case<br>base<br>potting             | nickel coated copper<br>FR4 PCB<br>silicone (UL94-V0) |
| Dimensions (LxWxH) | without Heat-sink<br>with Heat-sink | 25.4 x 25.4 x 9.9mm<br>31.4 x 25.4 x 16.5mm           |
| Weight             | without Heat-sink<br>with Heat-sink | 15g<br>21.44g                                         |

#### Dimension Drawing (mm)

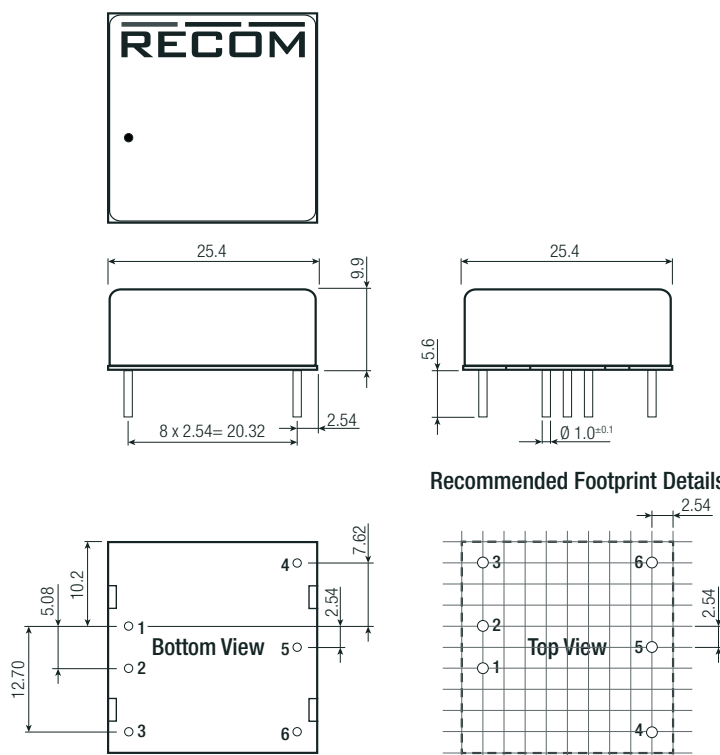

#### Pinning Information



| Pin # | Single              | Dual                |
|-------|---------------------|---------------------|
| 1     | +Vin                | +Vin                |
| 2     | -Vin                | -Vin                |
| 3     | CTRL <sup>(3)</sup> | CTRL <sup>(3)</sup> |
| 4     | +Vout               | +Vout               |
| 5     | Trim                | Com                 |
| 6     | -Vout               | -Vout               |

Pin Pitch Tolerance ±0.25mm  
Tolerance: xx.x= ±0.5mm  
xx.xx= ±0.25mm

continued on next page

**Specifications** (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

Dimension Drawing with Heat-sink (mm)

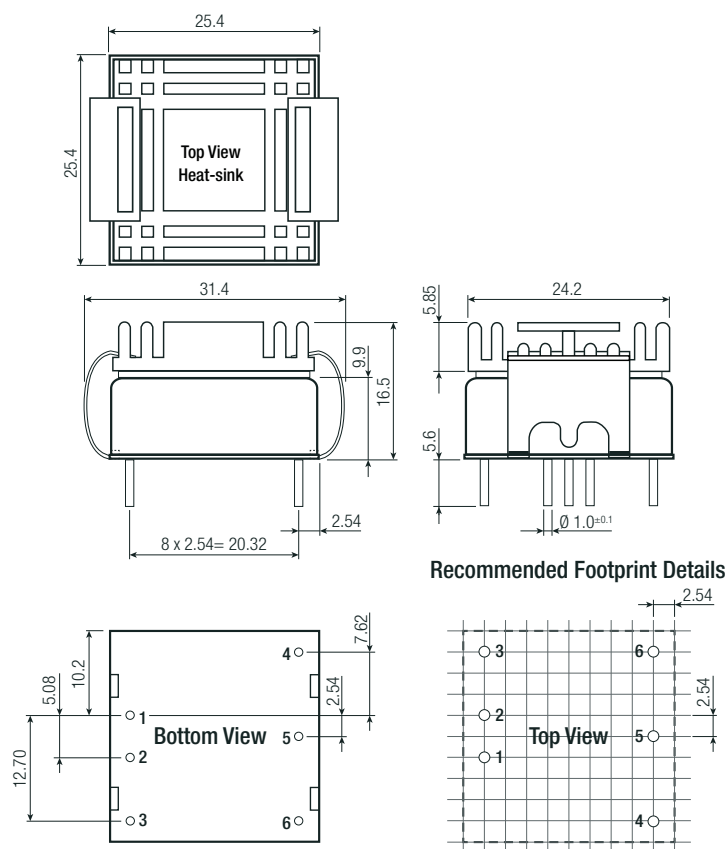


Pinning Information

| Pin # | Single              | Dual                |
|-------|---------------------|---------------------|
| 1     | +Vin                | +Vin                |
| 2     | -Vin                | -Vin                |
| 3     | CTRL <sup>(3)</sup> | CTRL <sup>(3)</sup> |
| 4     | +Vout               | +Vout               |
| 5     | Trim                | Com                 |
| 6     | -Vout               | -Vout               |

Pin Pitch Tolerance  $\pm 0.25\text{mm}$   
Tolerance: xx.x=  $\pm 0.5\text{mm}$   
xx.xx=  $\pm 0.25\text{mm}$

Recommended Footprint Details



**PACKAGING INFORMATION**

| Parameter                   | Type           |                   | Value                  |
|-----------------------------|----------------|-------------------|------------------------|
| Packaging Dimension (LxWxH) | tube           | without heat-sink | 257.0 x 28.5 x 21.0mm  |
|                             | tray           | with heat-sink    | 230.0 x 180.0 x 28.0mm |
| Packaging Quantity          | tube           | without heat-sink | 8pcs                   |
|                             | tray           | with heat-sink    | 20pcs                  |
| Storage Temperature Range   |                |                   | -55°C to +125°C        |
| Storage Humidity            | non-condensing |                   | 5% - 95% RH            |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## RECOM:

[RP20-4805SAW/N](#) [RP20-4812SAW](#) [RP20-4812DAW-HC](#) [RP20-2415SAW-HC](#) [RP20-243.3SAW/P](#) [RP20-2415DAW/P-HC](#) [RP20-2412DAW/P-HC](#) [RP20-4812SAW/P](#) [RP20-2405SAW](#) [RP20-4815DAW-HC](#) [RP20-483.3SAW/P-HC](#) [RP20-4815SAW/P](#) [RP20-4815DAW/N](#) [RP20-2412DAW/N](#) [RP20-4815SAW/N-HC](#) [RP20-483.3SAW](#) [RP20-4815DAW/P-HC](#) [RP20-2405SAW/P](#) [RP20-4805SAW/P-HC](#) [RP20-4812DAW/N-HC](#) [RP20-4805SAW](#) [RP20-2415SAW/N](#) [RP20-2415DAW](#) [RP20-2412SAW/N-HC](#) [RP20-2415DAW/P](#) [RP20-4815SAW-HC](#) [RP20-4812SAW/N-HC](#) [RP20-243.3SAW-HC](#) [RP20-243.3SAW/N-HC](#) [RP20-2412DAW](#) [RP20-4812DAW/N](#) [RP20-2412SAW-HC](#) [RP20-2415SAW/P-HC](#) [RP20-4805SAW/P](#) [RP20-243.3SAW/N](#) [RP20-4815DAW/P](#) [RP20-2415DAW/N-HC](#) [RP20-4815SAW/N](#) [RP20-2412SAW/N](#) [RP20-4815DAW](#) [RP20-2412SAW/P-HC](#) [RP20-4815SAW/P-HC](#) [RP20-243.3SAW/P-HC](#) [RP20-4805SAW-HC](#) [RP20-2405SAW-HC](#) [RP20-4812DAW/P-HC](#) [RP20-2415DAW-HC](#) [RP20-483.3SAW-HC](#) [RP20-2412DAW/N-HC](#) [RP20-2412DAW-HC](#) [RP20-483.3SAW/N-HC](#) [RP20-2405SAW/P-HC](#) [RP20-4812DAW/P](#) [RP20-2405SAW/N-HC](#) [RP20-483.3SAW/P](#) [RP20-2415SAW](#) [RP20-2412DAW/P](#) [RP20-2412SAW/P](#) [RP20-243.3SAW](#) [RP20-2415DAW/N](#) [RP20-483.3SAW/N](#) [RP20-4812SAW/P-HC](#) [RP20-2415SAW/P](#) [RP20-4812SAW-HC](#) [RP20-2412SAW](#) [RP20-4812SAW/N](#) [RP20-2405SAW/N](#) [RP20-4805SAW/N-HC](#) [RP20-4815SAW](#) [RP20-4815DAW/N-HC](#) [RP20-4812DAW](#) [RP20-2415SAW/N-HC](#)