

Features

Regulated Converter

- 4:1 wide input voltage range
- 1.6kVDC isolation
- UL certified
- Efficiency up to 89%
- Six-sided continuous shield
- Available as power module (RPM40-GW)

RECOM
DC/DC Converter

RP40-GW

40 Watt
2" x 2"
Single and
Dual Output



Description

The RP40-GW series wide input range DC/DC converters are certified to UL 60950-1 and to cUL 60950-1. This makes them ideal for all telecom and industrial applications where approved safety standards are required. The industry standard 2" x 2" package meets military standards for thermal shock and vibration tolerance.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Input ⁽¹⁾ Current [mA]	Efficiency ⁽¹⁾ typ. [%]	Max. Capacitive Load ⁽²⁾ [μF]
RP40-243.3SGW ^(3,4)	9-36	3.3	10000	1580	87	25750
RP40-2405SGW ^(3,4)	9-36	5	8000	1894	88	13600
RP40-2412SGW ^(3,4)	9-36	12	3333	1916	87	2360
RP40-2415SGW ^(3,4)	9-36	15	2666	1915	87	1510
RP40-483.3SGW ^(3,4)	18-75	3.3	10000	790	87	25750
RP40-4805SGW ^(3,4)	18-75	5	8000	936	89	13600
RP40-4812SGW ^(3,4)	18-75	12	3333	958	87	2360
RP40-4815SGW ^(3,4)	18-75	15	2666	947	88	1510
RP40-2412DGW ^(3,4)	9-36	±12	±1667	1938	86	±1200
RP40-2415DGW ^(3,4)	9-36	±15	±1333	1938	86	±750
RP40-4812DGW ^(3,4)	18-75	±12	±1667	958	87	±1200
RP40-4815DGW ^(3,4)	18-75	±15	±1333	969	86	±750

Notes:

- Note1: Maximum values at nominal input voltage and full load of standard type
Note2: Max. Cap load is tested at minimum Input and constant resistive load



UL
E196683



UL60950-1 certified

Model Numbering



Notes:

- Note3: no suffix for CTRL function with Positive Logic (1=ON, 0=OFF)
add suffix “N” for CTRL function with Negative Logic (0=ON, 1=OFF)
Note4: add suffix “-HC” for premounted Heat-sink with clips

Ordering Examples

RP40-2405SGW = 24V Input, 5V Output, Single, Positive Logic CTRL pin
RP40-4812DGN-HC = 48V Input, ±12V Output, Dual, Negative Logic CTRL pin, Heat-sink premounted

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

BASIC CHARACTERISTICS


Parameter	Condition		Min.	Typ.	Max.
Input Filter ⁽⁶⁾			Pi-Type		
Input Voltage Range	nom. Vin = 24VDC nom. Vin = 48VDC		9VDC 18VDC	24VDC 48VDC	36VDC 75VDC
Input Surge Voltage	100ms max.	nom. Vin = 24VDC nom. Vin = 48VDC			50VDC 100VDC
Under Voltage Lockout (UVLO)	nom. Vin = 24VDC	DC-DC ON DC-DC OFF		8VDC	9VDC
	nom. Vin = 48VDC	DC-DC ON DC-DC OFF		16VDC	18VDC
Output Voltage Trimming ⁽⁶⁾	refer to "OUTPUT VOLTAGE TRIMMING"		-10%		+10%
Input Reflected Ripple Current ⁽⁷⁾				20mA _{p-p}	
Minimum Load ⁽⁸⁾	Single Dual		0% 10%		
Start-up Time	Power up ON/OFF CTRL			20ms 20ms	
ON/OFF CTRL ⁽⁹⁾	Positive Logic	DC-DC ON DC-DC OFF	Open or 3.0VDC < V _{CTRL} < 12VDC Short or 0VDC < V _{CTRL} < 1.2VDC		
	Negative Logic	DC-DC ON DC-DC OFF	Short or 0VDC < V _{CTRL} < 1.2VDC Open or 3.0VDC < V _{CTRL} < 12VDC		
Input Current of CTRL pin			DC-DC ON	-0.5mA	+0.5mA
Standby Current	nom. Vin = 24VDC nom. Vin = 48VDC		DC-DC OFF DC-DC OFF	10mA 5mA	
Internal Operating Frequency ⁽¹⁰⁾				270kHz	300kHz
Ripple and Noise	measured by 20MHz BW	3.3V _{out} , 5V _{out} 12V _{out} , 15V _{out}		50mV _{p-p} 75mV _{p-p}	
		±12V _{out} ±15V _{out}		120mV _{p-p} 150mV _{p-p}	

Notes:

- Note5: An external filter capacitor is required for normal operation. The capacitor should be capable of handling 1A ripple current for 48V/24V models. RECOM suggest: Nippon chemi-con KY series, 220μF/100V, ESR 90mΩ
- Note6: For the single output: Maximum output deviation is 10% inclusive of remote sense and trim. If remote sense is not being use, the +Sense should be connected to its corresponding +V_{out} and likewise the -Sense should be conneted to its corresponding -V_{out}
- Note7: Simulated source impedance of 12μH. 12μH inductor in series with +Vin
- Note8: The dual output required a minimum loading on the output to maintain specified regulation. Operation under no- load condition will not damage these devices, however they may not meet all listed specification
- Note9: The ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin pin
- Note10: Operating frequency for dual output: master (5V_{out}) 300kHz slave (3.3V_{out}) 500kHz


RP40-2405SGW

Efficiency vs. Output Current

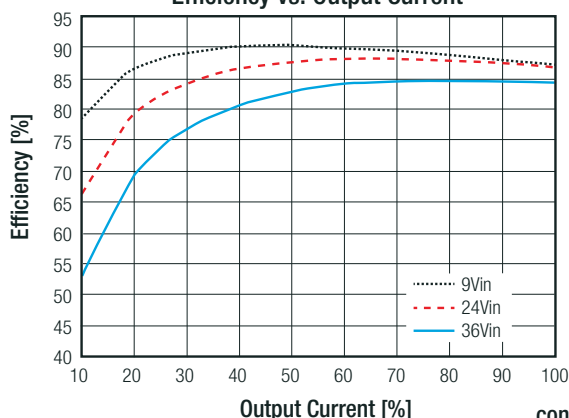

continued on next page


Efficiency vs. Input Voltage

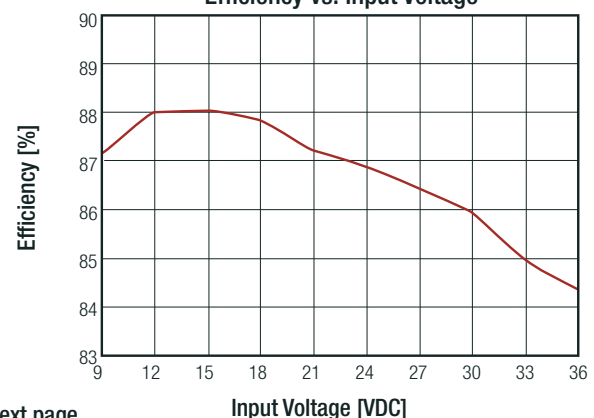


Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

RP40-4805SGW

Efficiency vs. Output Current

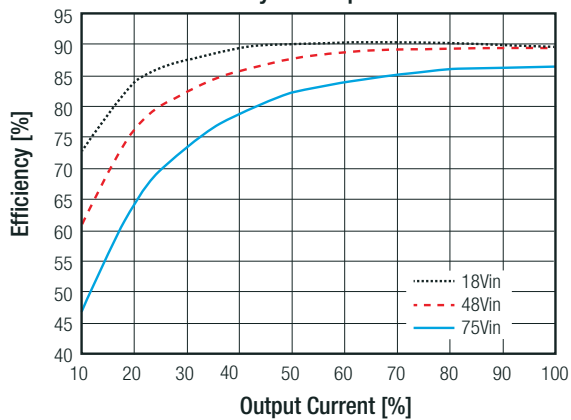


Efficiency vs. Input Voltage

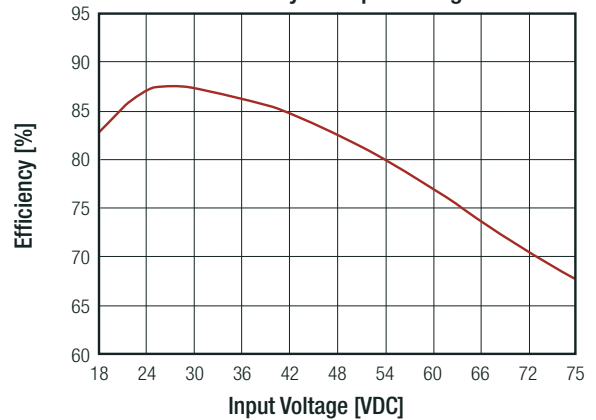

OUTPUT VOLTAGE TRIMMING

Output Voltage Trimming

Some single/dual output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

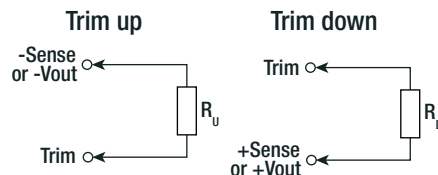

RP40-xx3.3SGW

Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.63	[VDC]
R _u =	57.93	26.16	15.58	10.28	7.11	4.99	3.48	2.34	1.46	0.75	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.97	[VDC]
R _d =	69.47	31.23	18.49	12.12	8.29	5.74	3.92	2.56	1.50	0.65	[kΩ]

RP40-xx05SGW

Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.4	5.45	5.50	[VDC]
R _u =	36.57	16.58	9.92	6.58	4.59	3.25	2.30	1.59	1.03	0.59	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	4.95	4.90	4.85	4.80	4.75	4.70	4.65	4.60	4.55	4.50	[VDC]
R _d =	45.53	20.61	12.31	8.15	5.66	4.00	2.81	1.92	1.23	0.68	[kΩ]

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

RP40-xx12SGW											
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20	[VDC]
R _u =	367.91	165.95	98.64	64.98	44.78	31.32	21.70	14.49	8.88	4.39	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	11.88	11.76	11.64	11.52	11.40	11.28	11.16	11.04	10.92	10.8	[VDC]
R _d =	460.99	207.95	123.60	81.42	56.12	39.25	27.20	18.16	11.13	5.51	[kΩ]
RP40-xx15SGW											
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	15.15	15.3	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50	[VDC]
R _u =	404.18	180.59	106.06	68.80	46.44	31.53	20.88	12.90	6.69	1.72	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	14.85	14.70	14.55	14.40	14.25	14.10	13.95	13.80	13.65	13.50	[VDC]
R _d =	499.82	223.41	131.27	85.20	57.56	39.14	25.97	16.10	8.42	2.282	[kΩ]
RP40-xx12DGW											
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40	[VDC]
R _u =	218.21	98.10	58.07	38.05	26.04	18.03	12.32	8.03	4.69	2.02	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	23.76	23.52	23.28	23.04	22.80	22.56	22.32	22.08	21.84	21.6	[VDC]
R _d =	273.44	123.02	72.87	47.80	32.76	22.73	15.57	10.20	6.02	2.67	[kΩ]
RP40-xx15DGW											
Trim up	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	30.30	30.60	30.90	31.20	31.50	31.80	32.10	32.40	32.70	33.00	[VDC]
R _u =	268.29	120.64	71.43	46.82	32.06	22.21	15.10	9.91	5.81	2.53	[kΩ]
Trim down	1	2	3	4	5	6	7	8	9	10	[%]
Vout =	29.70	29.40	29.10	28.80	28.50	28.20	27.90	27.60	27.30	27.00	[VDC]
R _d =	337.71	152.02	90.13	59.18	40.61	28.23	19.39	12.76	7.60	3.47	[kΩ]



REGULATIONS			
Parameter	Condition		Value
Output Accuracy			±1.0% max.
Line Regulation	low line to high line, full load		±0.2% max.
Load Regulation ^(8,11)	min. load to full load	Single	±0.5% max.
		Dual	±1.0% max.
Cross Regulation	asymmetrical 25%/100% FL		±5.0% max.
Transient Response Recovery Time	25% load step change		250µs typ.
Notes: Note11: Load regulation for dual output: Min load to 100% load balanced on all outputs			

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

PROTECTIONS			
Parameter	Condition		Value
Short Circuit Protection (SCP)			continuous, automatic recovery
Over Voltage Protection (OVP)	zener diode clamp	3.3Vout 5Vout 12Vout 15Vout	3.9VDC 6.2VDC 15VDC 18VDC
Over Load Protection (OLP)	% of Iout rated		150% max.
Over Temperature Protection (OTP)			110°C typ.
Isolation Voltage ⁽¹²⁾	I/P to O/P I/P to O/P to case		1.6kVDC/ 1 minute 1.6kVDC/ 1 minute
Isolation Resistance	Viso= 500VDC		1GΩ min.
Isolation Capacitance			2500pF max.
Notes:			
Note12: For repeat Hi-Pot testing, reduce the time and/or the test voltage			
Note13: This power module is not internally fused. An input line fuse must always be used			

ENVIRONMENTAL			
Parameter	Condition		Value
Operating Temperature Range	without derating with derating		-40°C to +57°C -40°C to +105°C
Maximum Case Temperature			+105°C max.
Temperature Coefficient			±0.02%/K max.
Thermal Impedance	@ natural convection 0.1m/s	without heat-sink with heat-sink	9.2K/W 7.6K/W
Operating Humidity	non-condensing		5% - 95% RH
Thermal Shock			according to MIL-STD-810F
Vibration			according to MIL-STD-810F
MTBF	MIL-HDBK-217F, G.B Bellcore TR-NWT-000332 ⁽¹⁴⁾		6617 x 10 ² hours 1105 x 10 ³ hours

Derating Graph ⁽¹⁵⁾

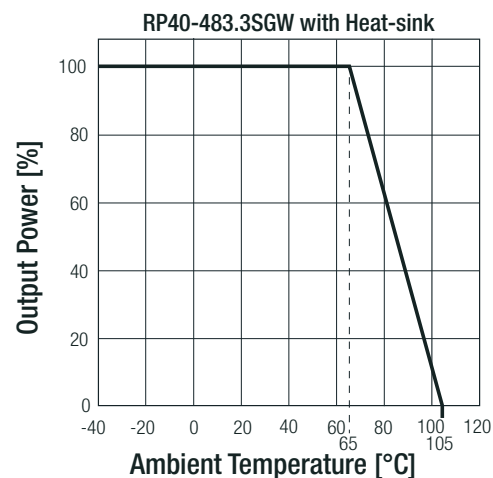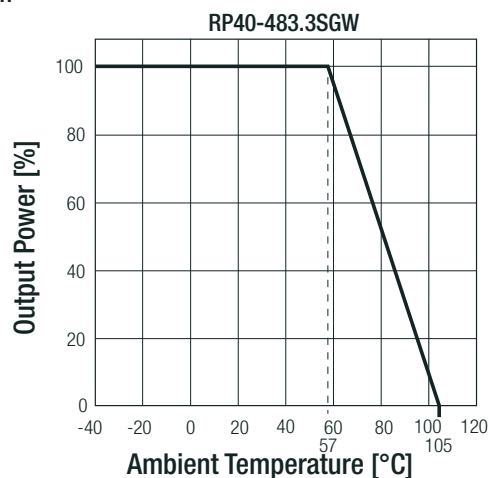

Notes:

Note14: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment)

Note15: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact RECOM Techsupport for detailed information

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Condition	Standard
Information Technology Equipment, General Requirements for Safety	E196683	UL60950-1, 2nd Edition 2011 CAN/CSA-C22.2 No. 60950-1-07, 2nd Edition 2011
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS2		RoHS-2011/65/EU + AM-2015/863



EMC Compliance

Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	EN55032, Class A and B
ESD Electrostatic discharge immunity test	EN61000-4-2, Criteria A
Radiated, radio-frequency, electromagnetic field immunity test	EN61000-4-3, Criteria A
Fast Transient and Burst Immunity ⁽¹⁶⁾	EN61000-4-4, Criteria B
Surge Immunity ⁽¹⁶⁾	EN61000-4-5, Criteria A
Immunity to conducted disturbances, induced by radio-frequency fields	EN61000-4-6, Criteria A
Power Magnetic Field Immunity	EN61000-4-8, Criteria A

Notes:



Note16: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5
The filter capacitor Recom suggests: Nippon chemi-con KY series 220µF/100V

EMC Filtering Suggestions according to EN55032

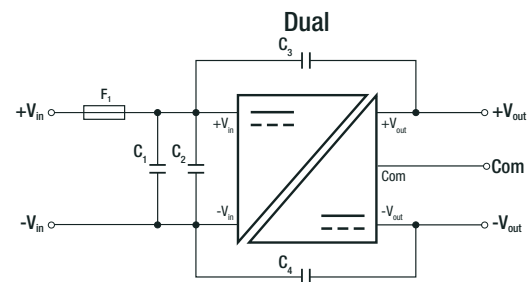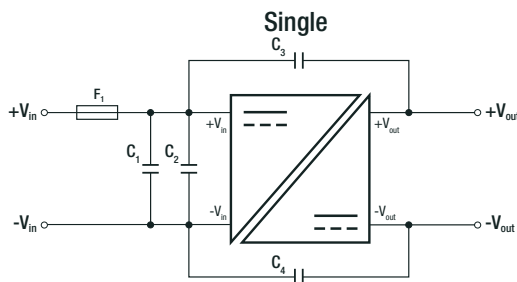

Component List Class A

MODEL	C1	C2	C3/C4
RP40-24xxSGW RP40-24xxDGW	N/A	N/A	1000pF/2kV, 1206 MLCC
RP40-48xxSGW RP40-48xxDGW	2.2µF/100V, 1812 MLCC	2.2µF/100V, 1812 MLCC	1000pF/2kV, 1206 MLCC

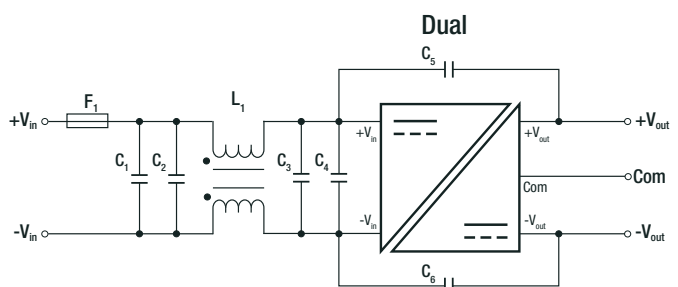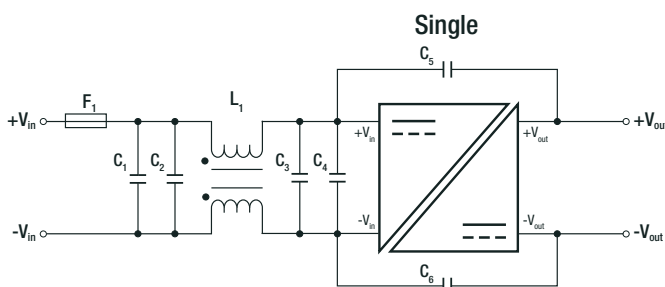

Component List Class B





MODEL	C1	C2	C3	C4	C5/C6	L1
RP40-24xxSGW RP40-24xxDGW	4.7µF/50V 1812 MLCC	N/A	4.7µF/50V 1812 MLCC	N/A	1000pF/2kV 1206 MLCC	CMC: 450µH ref.: WE 7448227005 or ref.: CMC-05
RP40-24xxSGW RP40-24xxDGW	2.2µF/100V 1812 MLCC	2.2µF/100V 1812 MLCC	2.2µF/100V 1812 MLCC	2.2µF/100V 1812 MLCC	1000pF/2kV 1206 MLCC	CMC: 830µH ref.: WE 744822301 or ref.: CMC-08

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	case	nickel coated copper
	base	FR4 PCB
	potting	epoxy (UL94-V0)
Dimensions (LxWxH)	without Heat-sink	50.8 x 50.8 x 10.2mm
	with Heat-sink	56.8 x 50.8 x 17.0mm
Weight	without Heat-sink	60.0g
	with Heat-sink	81.06g

Dimension Drawing (mm)

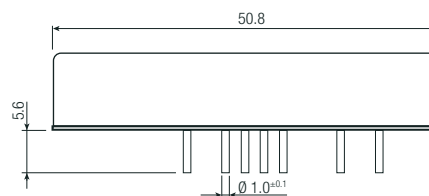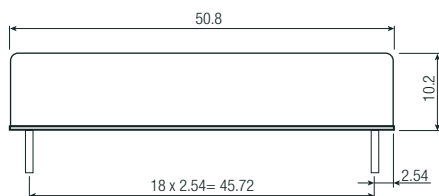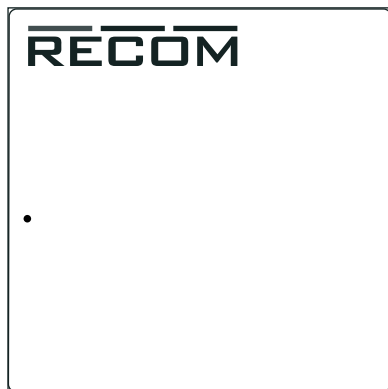



Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL ⁽³⁾	CTRL ⁽³⁾
4	-Sense ⁽⁶⁾	+Vout
5	+Sense ⁽⁶⁾	Com
6	+Vout	Com
7	-Vout	-Vout
8	Trim	Trim

Pin Pitch Tolerance $\pm 0.25\text{mm}$
 xx.x = $\pm 0.5\text{mm}$
 xx.xx = $\pm 0.25\text{mm}$


Recommended Footprint Details

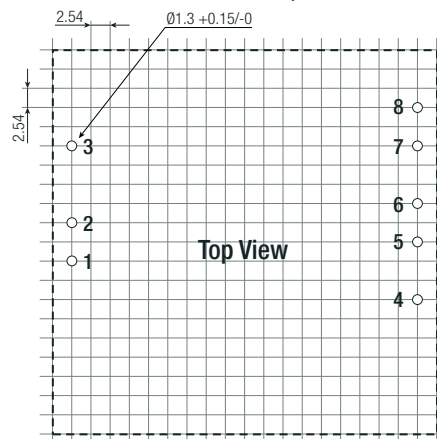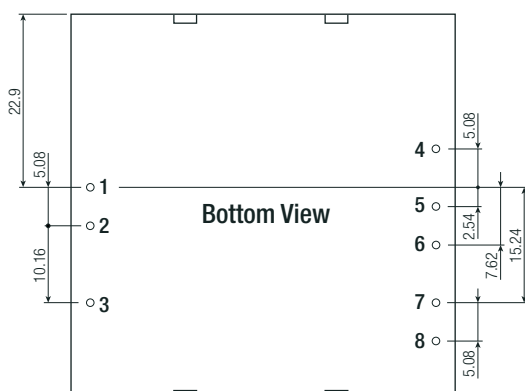

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

Dimension Drawing (mm) with Heat-sink





Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL ⁽³⁾	CTRL ⁽³⁾
4	-Sense ⁽⁶⁾	+Vout
5	+Sense ⁽⁶⁾	Com
6	+Vout	Com
7	-Vout	-Vout
8	Trim	Trim

Pin Pitch Tolerance $\pm 0.25\text{mm}$

xx.x = $\pm 0.5\text{mm}$

xx.xx = $\pm 0.25\text{mm}$

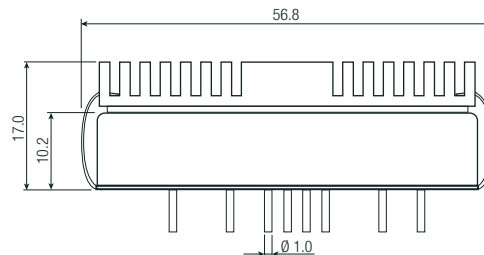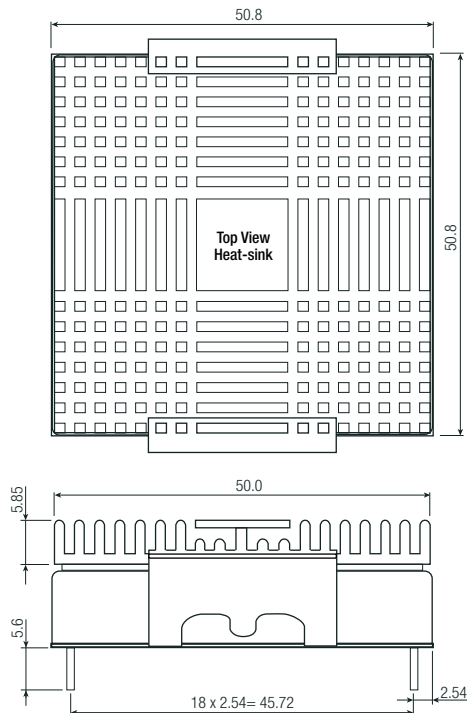

PACKAGING INFORMATION

Parameter	Type		Value
Packaging Dimension (LxWxH)	tube	without heat-sink	255.0 x 54.0 x 22.0mm
	tray	with heat-sink	306.0 x 226.0 x 30.0mm
Packaging Quantity	tube	without heat-sink	4pcs
	tray	with heat-sink	12pcs
Storage Temperature Range			-55°C to +125°C
Storage Humidity	non-condensing		5% - 95% RH

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[RECOM:](#)

[RP40-2405SGW](#) [RP40-2405SGW-HC](#) [RP40-2412DGW](#) [RP40-2412DGW/N](#) [RP40-2412DGW/N-HC](#) [RP40-2412DGW-HC](#) [RP40-2412SGW](#) [RP40-2412SGW-HC](#) [RP40-2415DGW](#) [RP40-2415DGW/N](#) [RP40-2415DGW/N-HC](#) [RP40-2415DGW-HC](#) [RP40-2415SGW](#) [RP40-2415SGW-HC](#) [RP40-243.3SGW](#) [RP40-243.3SGW-HC](#) [RP40-4805SGW](#) [RP40-4805SGW-HC](#) [RP40-4812DGW](#) [RP40-4812DGW/N](#) [RP40-4812DGW/N-HC](#) [RP40-4812DGW-HC](#) [RP40-4812SGW](#) [RP40-4812SGW-HC](#) [RP40-4815DGW](#) [RP40-4815DGW/N](#) [RP40-4815DGW/N-HC](#) [RP40-4815DGW-HC](#) [RP40-4815SGW](#) [RP40-4815SGW-HC](#) [RP40-483.3SGW](#) [RP40-483.3SGW-HC](#) [RP40-2405SGW/N](#) [RP40-2405SGW/N-HC](#) [RP40-2412SGW/N](#) [RP40-2412SGW/N-HC](#) [RP40-2415SGW/N](#) [RP40-2415SGW/N-HC](#) [RP40-243.3SGW/N](#) [RP40-243.3SGW/N-HC](#) [RP40-4805SGW/N](#) [RP40-4805SGW/N-HC](#) [RP40-4812SGW/N](#) [RP40-4812SGW/N-HC](#) [RP40-4815SGW/N](#) [RP40-4815SGW/N-HC](#) [RP40-483.3SGW/N](#) [RP40-483.3SGW/N-HC](#)