MODEL TLP-97311/A/SM

Ordering: P/N 61973111600

Termination: Pressure Contacts

TECHNICAL DATA


(Typical values @+25°C for batteries stored for one year or less)

- Capacity to 3.0V (@250mA @1% duty cycle) Nominal voltage Maximum 1 second pulse to 3.0V Maximum pulse length @125mA to 2.8V Delay time to 3.0V @125mA Weight Operating temperature range
- Capacity retention after 10 years
- 1.65 Ah 3.6 V 1 A 1000 sec No Delay 35 gr -40°C to +85°C 85%







- HIGH ENERGY
- **UP TO 1A PULSE CAPABILITY**
- **INSTANT VOLTAGE RESPONSE**
- NO PASSIVATION EFFECT

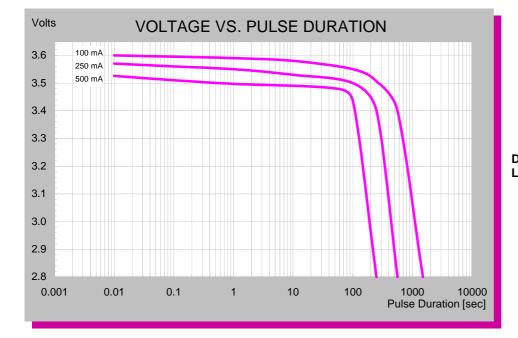



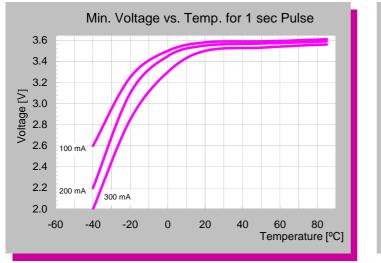

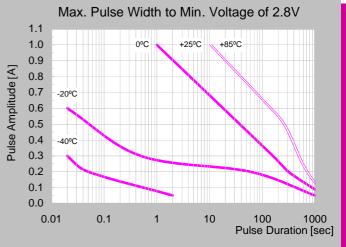

For High Pulse Current Applications

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. ECN 6100625 Rev. D June/07


MODEL TLP-97311/A/SM

The battery is designed specifically for applications requiring low background currents combined with high current pulses. The Pulses Plus[™] battery combines the inherent benefits of bobbin type Lithium Thionyl Chloride cell with a novel hermetically sealed Hybrid Layer Capacitor (HLC). The addition of the HLC

enhances the performance of the Lithium


* The PTC is optional and not necessary in many cases


Thionyl Chloride cell to meet large pulse current requirements, thus providing greater performance and safety in comparison to jellyroll construction (spirally wound) type batteries.








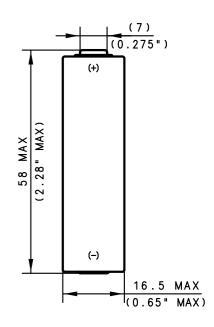

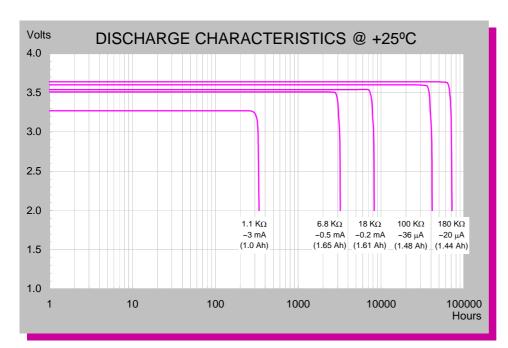

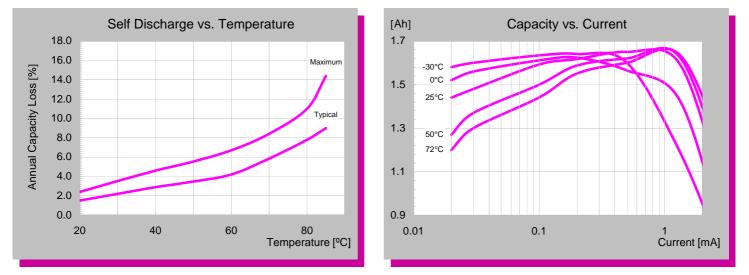

For High Pulse Current Applications

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. ECN 6100625 Rev. D June/07

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Tadiran Batteries: TLP-97311/A/SM