



Nominal Voltage:	3.0 V
Typical Voltage:	3.2-3.3 V
Nominal Internal Impedance:	0.3 ohm @ 1kHz
Average Weight:	11 g
Volume:	5.168 cm. ³
Terminals:	Flat, Recessed Negative Terminal, Nickel Plated Steel
Operating Temp. Range:	-20°C to 75°C (-4°F to 167°F)
NEDA/ANSI :	CR2
IEC:	-

Delivered Energy vs. Power Drain
@ Various Cutoff Voltage - Room Temperature

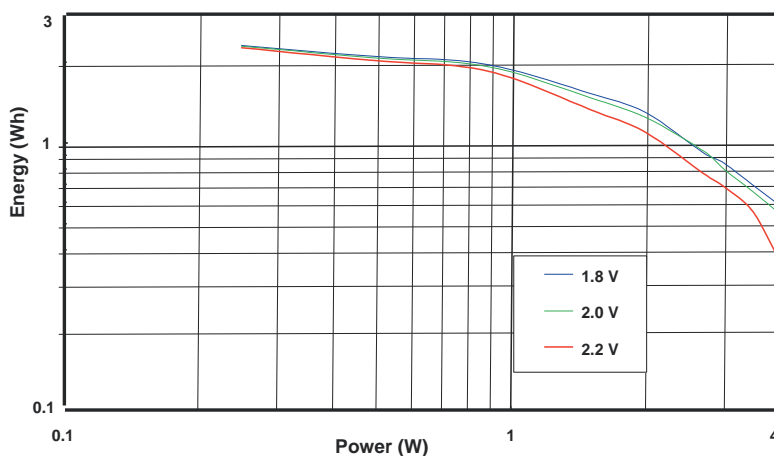


Duracell Ultra CR2 Typical Performance


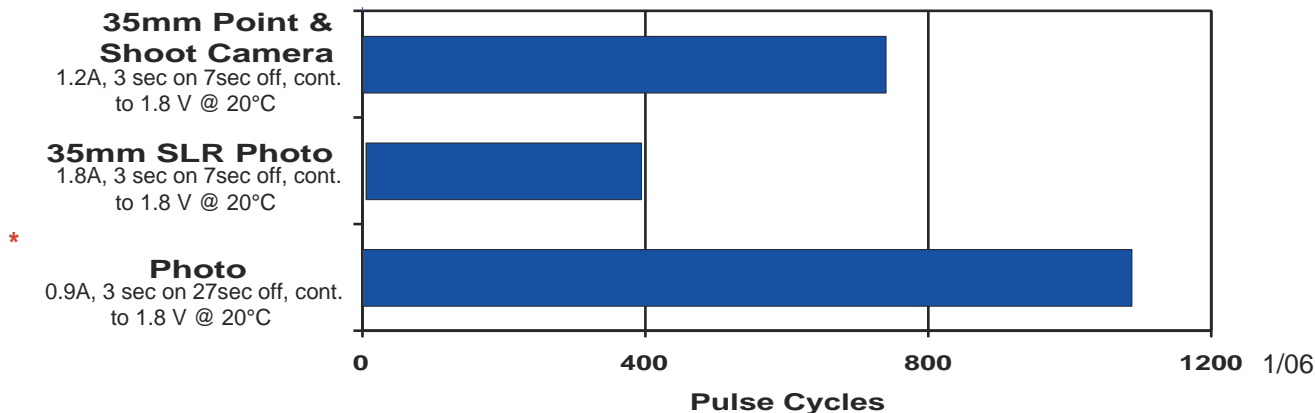


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.


1.8 Amp 3 sec on/ 7 sec off
@ Various Temperatures

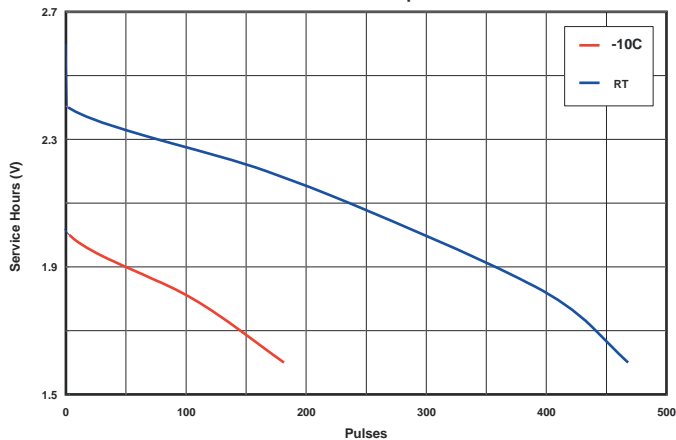

1.2 Amp, 3 sec on/ 7 sec off
@ Various Temperatures

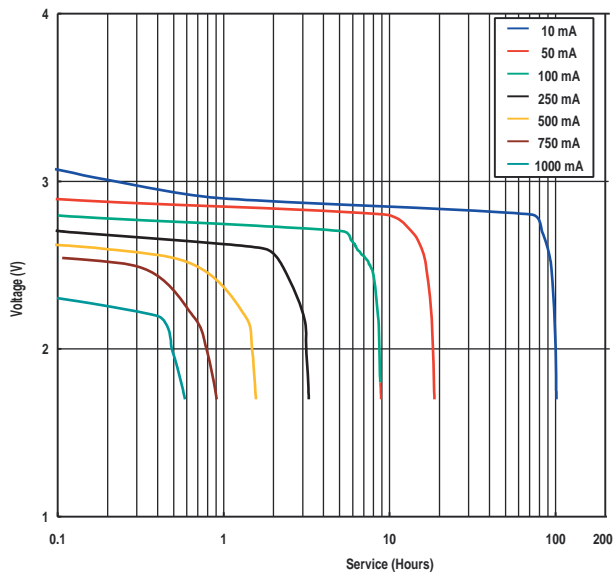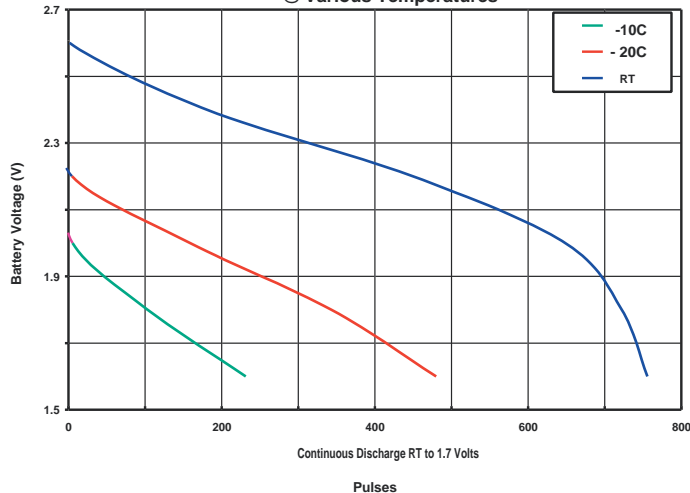

0.9 Amp, 3 sec on/27 sec off
@ Various Temperatures

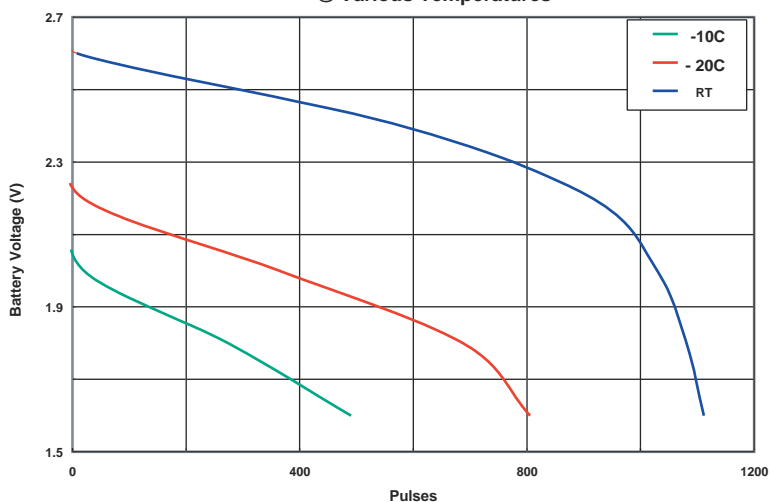

DURACELL®

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Duracell:](#)

[DLCR2](#)