
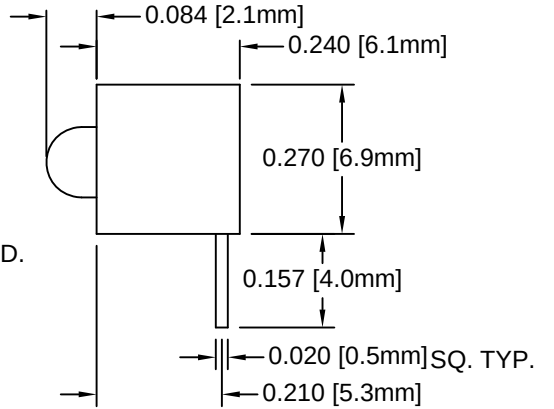
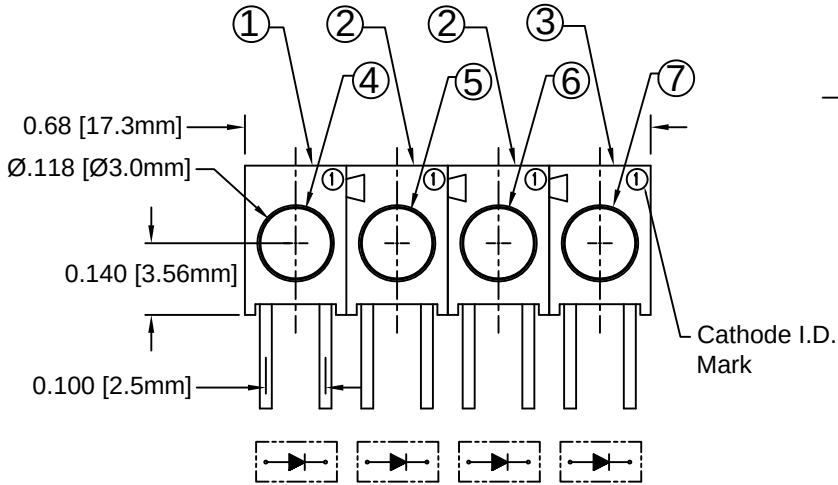


ITEM	Q'TY	PART NUMBER	PART DESCRIPTION
1	1	H-132C-1-140	T-1 (3mm) LED HOLDER, INTERLOCKING
2	2	H-130C-1-140	T-1 (3mm) LED HOLDER, INTERLOCKING
3	1	H-133C-1-140	T-1 (3mm) LED HOLDER, INTERLOCKING
4	1	3GD-S	T-1 (3mm) Shouldered LED
5	1	3YD-S	T-1 (3mm) Shouldered LED
6	1	3AD-S	T-1 (3mm) Shouldered LED
7	1	3HD-S	T-1 (3mm) Shouldered LED

REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	02/28/07	M. C.
B	Corrected Holder Part Numbers	05/15/07	M. C.
C	Corrected Assembly Height	06/22/07	M. C.
D	LED Spec Upgrade	07/10/08	M. C.
E	Engineering Update w/o Changes	06/20/16	J. C.

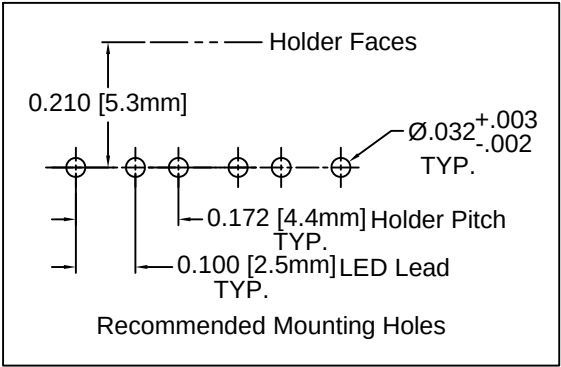

LED Part No.	Chip			Lens Appearance	Absolute Max. Ratings				Electro-Optical Data @ 20mA			Viewing Angle 2 Θ½ (Deg)
	Material	Peak Wave Length λp (nm)	Emitted Color		Δλ (nm)	Pd (mW)	If (mA)	Peak If (mA)	Vf (V)		Iv (mcd)	
									TYP	MAX	TYP	
3GD-S	GaP/GaP	568	GREEN	DIFFUSED	30	80	30	150	2.1	2.8	25	40
3YD-S	GaAsP/GaP	590	YELLOW	DIFFUSED	35	85	30	150	2.0	2.8	20	40
3AD-S	GaAsP/GaP	605	AMBER	DIFFUSED	35	80	30	150	2.0	2.8	25	40
3HD-S	GaAsP/GaP	625	HE RED	DIFFUSED	40	80	30	150	2.0	2.8	30	40

ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

REVERSE VOLTAGE _____ 5V

REVERSE CURRENT (VR=5V) _____ 100 μ A

OPERATING TEMPERATURE RANGE _____ -25°C ~ 85°C

STORAGE TEMPERATURE _____ -30°C ~ 100°C

LEAD SOLDERING TEMPERATURE (1/16" FROM BODY) _____ 260°C for 5 Seconds

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		BIVAR®	
DECIMALS	ANGULAR	4 THOMAS, IRVINE, CA. 92618	
.X $\pm$.1	X° $\pm$ 1°	TEL.: (949) 951-8808 FAX: (949) 951-3974	
.XX $\pm$.02		TITLE: T-1 (3mm) LED'S & HOLDER, 90° INTERLOCKED ASSEMBLY	
.XXX $\pm$.010			
DESIGNED: D. Beckman	DATE: 02/28/07	PART NO: H134CGYAHD-140	REVISION: E
CHECKED: T. Yin	DATE: 02/28/07	CAGE CODE : 32559	SHEET # 1 OF 1
CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

BIVAR:

[H134CGYAHD-140](#)