
	REV.	DESCRIPTION	DATE	APPROVED
	П	Engineering Update w/o Changes	02/26/04	M.C.
	П	Material Update	10/13/08	T.Y.
1				

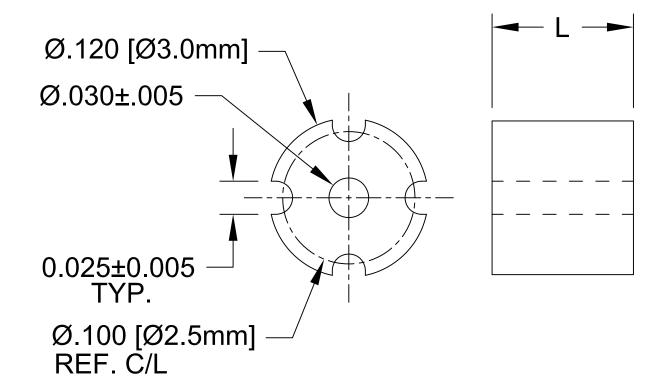

- 3. TOLERANCE "L" DIMENSION:
  - 0.030 0.500 (1.0 12.7mm)±0.005(0.1mm)
  - 0.505 0.750 (12.8 19.1mm)±0.008(0.2mm)
  - 0.755 1.250 (19.2 31.8mm)±0.015(0.4mm)
- 2. MATERIAL: PVC ALLOY, 94V-0, BLACK. BIVAR MATERIAL CODE 58-BK. CYBERSHIELD PVC ALLOY, CS1534WX-BLK02N BLACK.
- 1. GENERAL SPECIFICATIONS: BIVAR EXTRUDED PRODUCT SPECIFICATION BV00-E105.

M. Chen 12/17/02		CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.		
CHECKED:	DATE:	CAGE CODE: 32559 SHEET#	1 <b>OF</b> 1	
Shane Irving	02/03/98	ELM 7	F	
DESIGNED:	DATE:	PART NO:	REVISION:	
.XXX ± .005	$\oplus \Box$	TITLE: EXTRUDED, SELF-RETAINING LED MOUNT		
.X ± .1	X° ±1°	4 THOMAS, IRVINE, CA. 9 TEL: (949) 951-8808 FAX: (949) 9		
( UNLESS OTHERWIS	SE SPECIFIED ) ANGULAR		®	

STANDARD TOLERANCE

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **BIVAR:**

ELM 7-020 ELM 7-025 ELM 7-030 ELM 7-040 ELM 7-045 ELM 7-050 ELM 7-060 ELM 7-065 ELM 7-070 ELM 7-075 ELM 7-080 ELM 7-090 ELM 7-095 ELM 7-1.000 ELM 7-100 ELM 7-105 ELM 7-100M ELM 7-110 ELM 7-115 ELM 7-1140 ELM 7-125 ELM 7-125 ELM 7-125 ELM 7-1260 ELM 7-130 ELM 7-135 ELM 7-1360 ELM 7-140 ELM 7-190 ELM 7-190M ELM 7-150 ELM 7-155 ELM 7-1560 ELM 7-160M ELM 7-170M ELM 7-180 ELM 7-180M ELM 7-190 ELM 7-190M ELM 7-190M ELM 7-245 ELM 7-240M ELM 7-210 ELM 7-210M ELM 7-220 ELM 7-220M ELM 7-300 ELM 7-300 ELM 7-315 ELM 7-325 ELM 7-325 ELM 7-335 ELM 7-345 ELM 7-350 ELM 7-355 ELM 7-360 ELM 7-375 ELM 7-385 ELM 7-385 ELM 7-340 ELM 7-400 ELM 7-400 ELM 7-560 ELM 7-580 ELM 7-585 ELM 7-590 ELM 7-590 ELM 7-500 ELM 7-600 ELM 7-600 ELM 7-625 ELM 7-655 ELM 7-655 ELM 7-665 ELM 7-600 ELM 7-700 ELM 7-735 ELM 7-750 ELM 7-750