


REV.	DESCRIPTION	DATE	APPROVED
F	Engineering Release	10/03/12	T. Y.
G	Engineering Update w/o Changes	08/08/16	J. C.

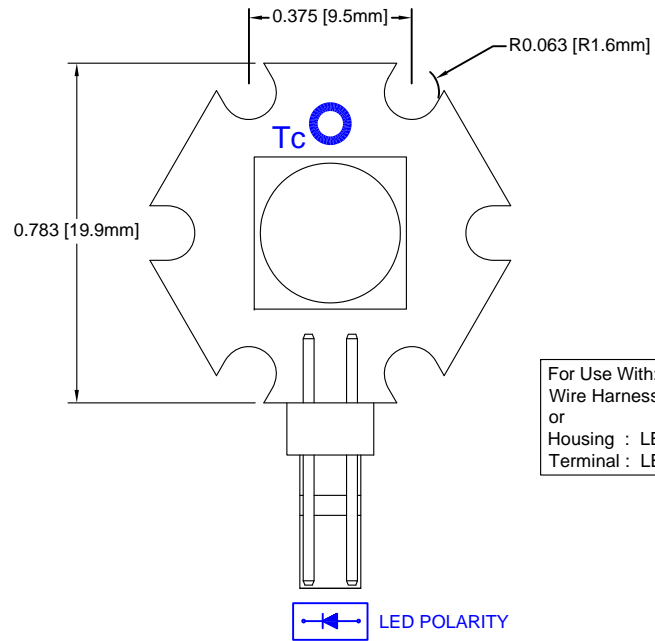

For Use With:  
 Wire Harness: BIVAR L2CON-24  
 or  
 Housing : LEOCO 2530S020000  
 Terminal : LEOCO 2533TPB0000

Part Number	CCT (K)	CRI	Typical Luminous Flux @ If = 200mA, Tc=70C (lm)	Typical Luminous Flux @ If = 350mA, Tc=100C (lm)	Typical DC Forward Current, Vf (V)	Viewing Angle (°)
L2-TGN1-F	4000	80	141	160	5.2 ~ 5.3	120
L2-TGW1-F	3000	80	130	148	5.2 ~ 5.3	120

Part Number	CCT (K)	CRI	Typical Luminous Flux @ If = 1000mA, Tc=120C (lm)	Typical Luminous Flux @ If = 2500mA, Tc=60C (lm)	Typical DC Forward Current, Vf (V)	Viewing Angle (°)
L2-TGN1-F	4000	80	216	660	5.6 ~ 5.9	120
L2-TGW1-F	3000	80	186	566	5.6 ~ 5.9	120

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
DECIMALS	ANGULAR		
.X ± .1	X° ± 1°	 <b>TITLE:</b> L2 Starboard Light Engine	
.XX ± .02			
.XXX ± .010		<b>PART NO:</b> L2-TGXX-F	
DESIGNED: <b>B. Oliver</b>	DATE: <b>11/02/11</b>	<b>REVISION:</b> G	
CHECKED: <b>T. Yin</b>	DATE: <b>11/02/11</b>	<b>CAGE CODE :</b> 32559 <b>SHEET #</b> 1 <b>OF</b> 1	
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.			

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[BIVAR:](#)

[L2-TGW1-F](#) [L2-TGN1-F](#)