
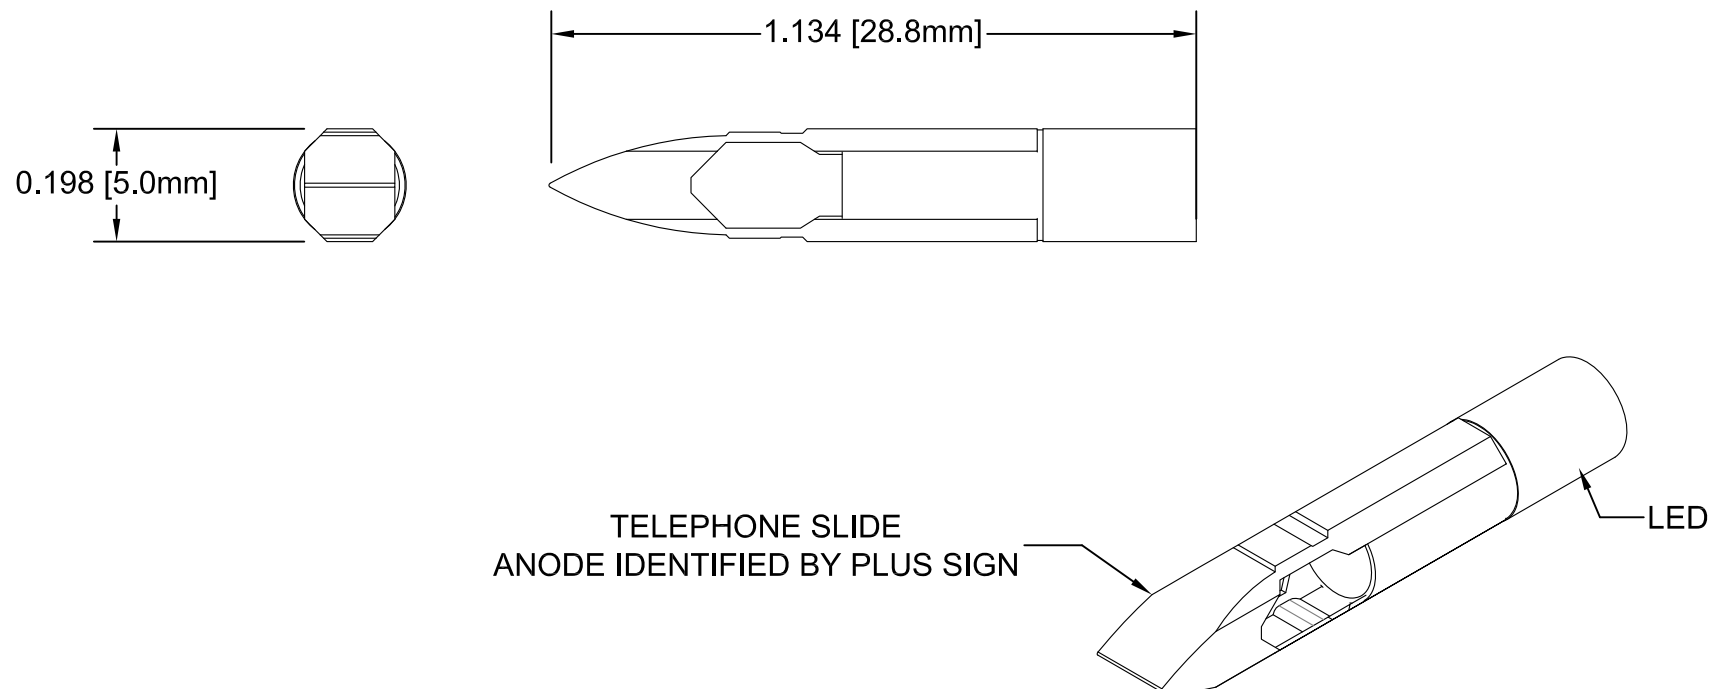


REV.	DESCRIPTION	DATE	APPROVED
A	Engineering Release	10/21/13	G. W.




NOTES:
1. DIRECT REPLACEMENT FOR Ts5.5 (T5.5 TELEPHONE SLIDE) BASED LAMPS

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618	
DECIMALS	ANGULAR		
.X ± .1	X° ± 1°	 TITLE: 209 SERIES INCANDESCENT REPLACEMENT LED	
.XX ± .02			
.XXX ± .010		PART NO: LFR-209X-XXX	
DESIGNED: Alex Wright	DATE: 10/21/13	CAGE CODE : 32559 SHEET # 1 OF 2	
CHECKED: Minh Doan	DATE: 10/21/13	REVISION: A CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.	


REV.	DESCRIPTION	DATE	APPROVED
	SEE SHEET #1		

DERATING CURVES


Derating Graph 1




Derating Graph 2



Derating Graph 3



Derating Graph 4




Bivar Part Number	Wave Length λ_p (nm)	Emitted Color	Lens Appearance	Operating Voltage	Electro-Optical Data		Viewing Angle	De-rating Graphs
				Vf (Vdc)	Current DC (mA)	Iv (mcd)		
				TYP	TYP	TYP		
LFR-209R12V	630	RED	CLEAR	12	20	600	120	1
LFR-209R28V	630	RED	CLEAR	28	20	600	120	1
LFR-209Y12V	585	YELLOW	CLEAR	12	20	600	120	1
LFR-209Y28V	585	YELLOW	CLEAR	28	20	600	120	1
LFR-209G12V	515	GREEN	CLEAR	12	20	800	120	2
LFR-209G24V	515	GREEN	CLEAR	24	20	800	120	2
LFR-209G28V	515	GREEN	CLEAR	28	20	800	120	2
LFR-209B12V	465	BLUE	CLEAR	12	20	230	120	4
LFR-209B28V	465	BLUE	CLEAR	28	20	230	120	4
Bivar Part Number	Chromaticity Coordinates	Emitted Color	Lens Appearance	Operating Voltage	Electro-Optical Data		Viewing Angle	De-rating Graphs
				Vf (Vdc)	Current DC (mA)	Iv (mcd)		
				TYP	TYP	TYP		
LFR-209WW12V	X=0.4255~0.4680 Y=0.4000~0.4385	WARM WHITE	CLEAR	12	20	850	120	3
LFR-209WW28V	X=0.4255~0.4680 Y=0.4000~0.4385	WARM WHITE	CLEAR	28	20	850	120	3
LFR-209CW12V	X=0.31 Y=0.32	COOL WHITE	CLEAR	12	20	1100	120	3
LFR-209CW28V	X=0.31 Y=0.32	COOL WHITE	CLEAR	28	20	1100	120	3

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

MAXIMUM POWER DISSIPATION _____ 500 mW

OPERATING TEMPERATURE RANGE _____ $-40^\circ\text{C} \sim 85^\circ\text{C}$

STORAGE TEMPERATURE _____ $-40^\circ\text{C} \sim 100^\circ\text{C}$

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974	
<u>DECIMALS</u>			
<u>ANGULAR</u>			
DESIGNED:	DATE:	TITLE: 209 SERIES INCANDESCENT REPLACEMENT LED	
Alex Wright	10/21/13	PART NO: LFR-209X-XXX	REVISION: A
CHECKED:	DATE:	CAGE CODE : 32559	SHEET # 2 OF 2
Minh Doan	10/21/13	CAD GENERATED DOCUMENT, DO NOT MEASURE DRAWING.	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

BIVAR:

[LFR-209WW12V](#) [LFR-209Y28V](#) [LFR-209Y12V](#) [LFR-209B12V](#) [LFR-209R28V](#) [LFR-209R12V](#) [LFR-209WW28V](#)
[LFR-209CW28V](#) [LFR-209B28V](#) [LFR-209CW12V](#) [LFR-209G28V](#) [LFR-209G12V](#)