


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/12/18	C.E.

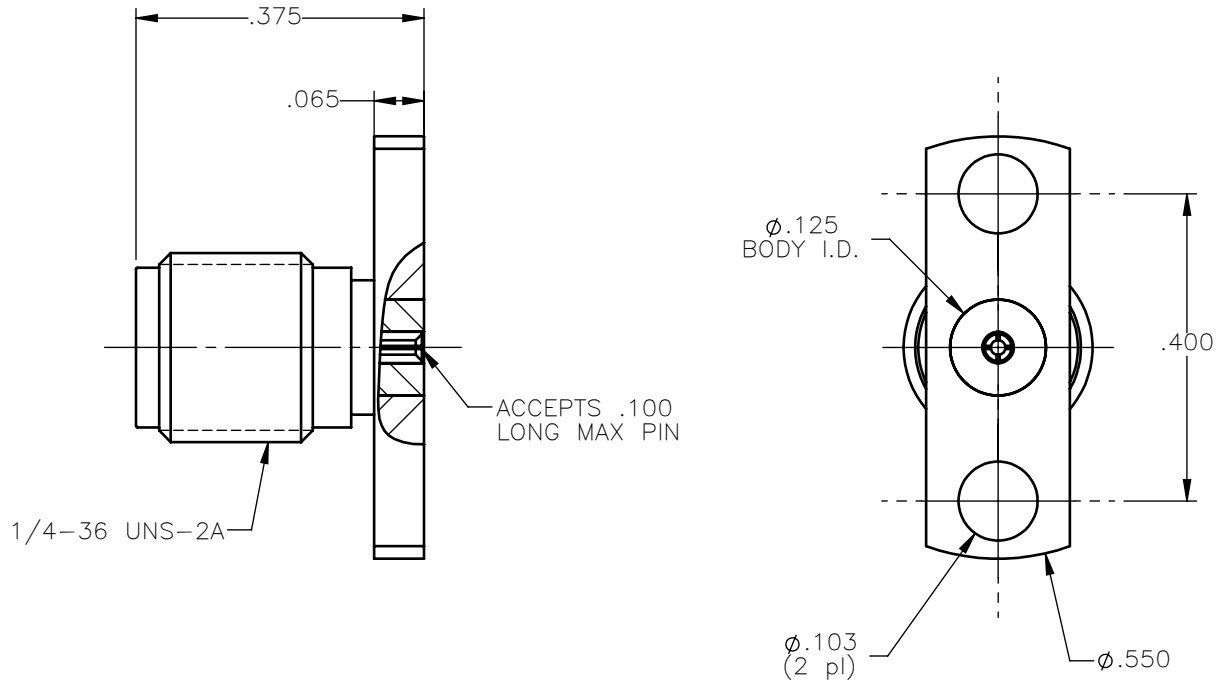

NOTES:

MATERIALS:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.

FINISHES:

1. BODY = PASSIVATE PER SAE-AMS-2700.
2. CONTACT = GOLD PLATE PER ASTM B488-11, TYPE II, 50μin MIN, GRADE C, OVER 100 TO 200μin STRESS FREE SULFAMATE NICKEL PER AMS-QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: C.E.	DATE 03/12/18	 Property of Radiall This document cannot be reproduced or communicated to a third party without prior written permission of RADIALL.	
		CHKD:	DATE 03/12/18		
DECIMAL	ANGLE	D.N.	03/12/18	SMA STRAIGHT JACK 2-HOLE FLANGE MOUNT HERMETIC SEAL LAUNCHERS	
		APVD:	DATE 03/12/18		
REFERENCE:		MATERIAL:		SIZE A	FSCM NO. 19505
ORIGINATED: C.E. DATE: 03/12/18		SEE NOTES		DWG NO. 9180-9513-001	
				SCALE 4:1	THIRD ANGLE PROJECTION
				SHEET 1 OF 2	

9180-9513-001

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[9180-9513-001](#)