



OSIS by Radiall™
One Step Interconnection Solution

Introduction

THE EASIEST OUTDOOR INTERCONNECTION SOLUTION: IN ONLY ONE CLICK !

To meet the requirements of telecommunication operators in new generation of flexible base stations using FTTA links (fiber-to-the-antenna), Radiall has developed a new fast waterproof connection system: OSIS™, the One Step Interconnection Solution.

The OSIS by Radiall (Trademark) connection system makes secure and waterproof standard LC connection to SFP transceiver at the panel front of the equipment. It has been designed to withstand environmental constraints of outdoor applications in field conditions.

OSIS™ is available as a component (Kit Plug) to fit on any conventional LC connector or as a complete cable assembly.

BENEFITS & FEATURES

Easy to Install

- Quick lock Push-Pull connection system in One Step - Patent Pending
- Direct Plug into SFP module
- Compensation of the transceiver position tolerances in X, Y and Z axis

Robust and safe

- LC connectors always protected
- Waterproof and dustproof
- Important tensile strength



Flexible and modular

- Kit assembled in the field without tools over existing optical patch cords
- Compatible with a large range of standard LC connectors and standard SFP transceivers

High density

- Stackable



APPLICATIONS

- All outdoor telecommunication applications
- Antenna uplinks and downlinks in new installations supporting innovative technologies: 3G, 4G, WIMAX, CDMA, LTE



Products characteristics


OSIS™ PLUG KIT

Part Number: OSIS 115 000

(Plug connector only: no patch cord)



Overall Dimensions (mm)


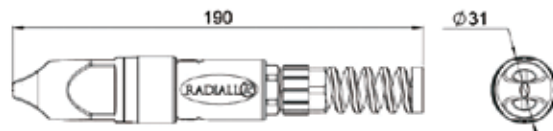


Packaging: unitary in plastic bag with assembly note.

The OSIS™ Plug Kit is adapted to all types of optical cable assemblies with simplex or duplex standard LC connectors and 5 to 7 mm diameter MultiMode or SingleMode field cable - other diameters on request.

To guarantee proper operation when the OSIS™ Plug Kit is assembled over existing optical patch cords, the following fan-out definition is recommended:

FIBER STRIPPING AND TUBING RECOMMENDATIONS:

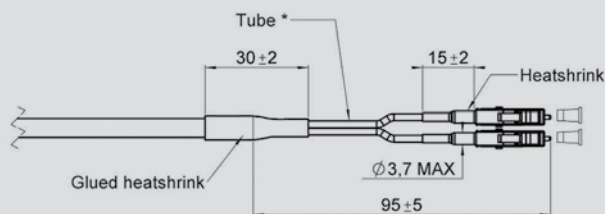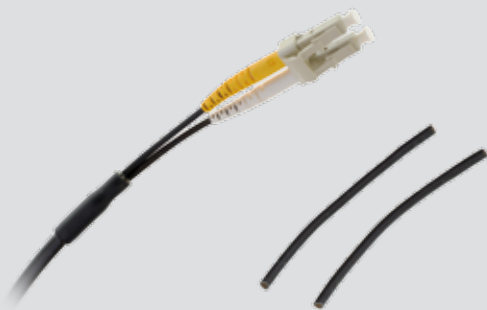

**Tube must be flexible enough to guarantee an even bending radius of the fiber.*
RADIALL recommends the use of OSIS 990 000 retubing kit.

MAIN CHARACTERISTICS

OSIS by Radiall™ connector is IEC 61300 qualified (fiber optic interconnection devices)

Mechanical

Endurance	100 mating cycles minimum
Retention force	200N
Vibrations / Shocks	IEC 61300-2-1 / IEC 61300-2-9


Environmental

Ingress protection	IP65 or IP67 optionally
Temperature range	-40°C to +85°C
Salt Mist	IEC 61300-2-26



RADIALL 
The next connexion

OSIS™ PRE-MOUNTED OPTICAL CABLE ASSEMBLIES

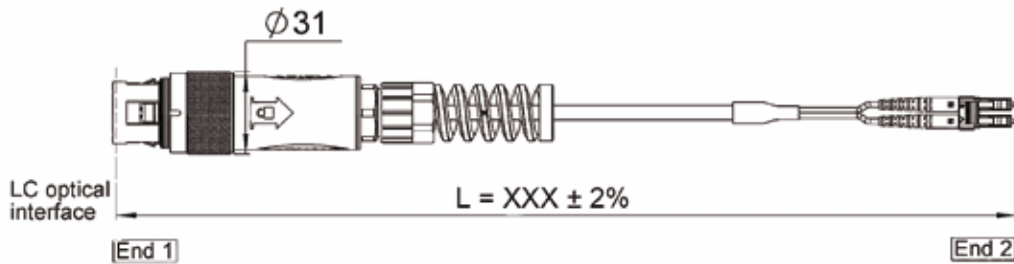

Any configuration of pre-mounted optical cable assembly with OSIS™ is available on demand:

- Field cables with diameters of 5 to 7 mm on standard – other cable sizes on request
- Standard LC connectors (OSIS side)
- Any possibility of optical connectors on the opposite side (LC, SC, FC, ST, ...)
- Simplex or duplex connectors
- MultiMode (50/125 or 62.5/125 on request) or SingleMode (9/125) field cable
- Polishing/finishing: PC or APC

OPTICAL CHARACTERISTICS

According to IEC 61300-3-4 and IEC 61300-3-6

MultiMode field cable


Insertion Loss (mated with reference plug) @850 nm	$\leq 1.2 \text{ dB} + 2.5 \text{ dB/Km}$
--	---

SingleMode field cable

Insertion Loss (mated with reference plug) (@1310 & 1550 nm)	$\leq 1.2 \text{ dB}$
Return Loss (@1310 & 1550 nm)	$RL > 45 \text{ dB}$

LC PATCH CORDS

Radiall can also provide any configuration of LC optical patch cords for use with the OSIS™ Plug Kit.

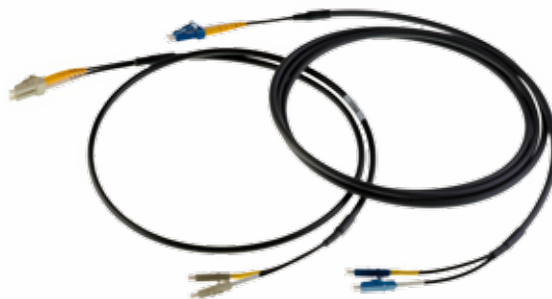

OSIS™ RECEPTACLES



The standard OSIS™ receptacle is waterproof to IP67.

The receptacle is delivered with the protection cap mounted on the body.

It includes a center pin which has to be inserted into the transceiver cage to center the receptacle in X and Y axis before to fix it on the panel with screws.




Figure 1




Figure 2

PART NUMBER	FIGURE	DESCRIPTION
OSIS 107 000	1	Receptacle with Trapezoidal fixture holes (foot print 24 / 27 x 30 mm)
OSIS 107 001	1	Receptacle with Trapezoidal fixture holes (foot print 24 / 27 x 30 mm) with cord
OSIS 107 002	2	Receptacle with Square fixture holes (foot print 28 x 28 mm)



AEROSPACE



AUTOMOTIVE



DEFENSE



INDUSTRIAL



INSTRUMENTATION



MEDICAL



SPACE



TELECOM

EUROPE

France - RADIALL S.A.

101, Rue Ph. Hoffmann
93116 ROSNY sous BOIS (Paris)
Tel.: +33 1 49 35 35 35 - Fax: +33 1 48 54 63 63
E-Mail: info@radiall.com

Finland - RADIALL SF

P.O. Box 202 - 90101 OULU
Tel.: +358 407 522 412
E-Mail: infofi@radiall.com

Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143
D63307 - RÖDERMARK (Frankfurt)
Tel.: +49 60 74 91 07 0 - Fax: +49 60 74 91 07 70
E-Mail: infode@radiall.com

Italy - RADIALL Elettronica S.R.L.

Via Concordia, 5 - 20090 ASSAGO MILANO
Tel.: +39 02 48 85 121 - Fax: +39 02 48 84 30 18
E-Mail: infoit@radiall.com
Regional office: Roma

Netherlands - RADIALL B.V.

Hogebrinkerweg 15b - 3871 KM HOEVELAKEN
Tel.: +31 33 253 40 09 - Fax: +31 33 253 45 12
E-Mail: infofl@radiall.com

Sweden - RADIALL A.B.

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)
Tel.: +46 844 434 10 - Fax: +46 875 449 16
E-Mail: infose@radiall.com

U.K. - RADIALL Ltd.

Ground Floor, 6 The Grand Union Office Park,
Packet Boat Lane
UXBRIDGE Middlesex UB8 2GH (London)
Tel.: +44 1895 425 000 - Fax: +44 1895 425 010
E-Mail: infouk@radiall.com

NORTH AMERICA

USA - RADIALL USA, Inc.

6825 West Galveston Street
CHANDLER, Arizona 85226
Tel.: +1 480 682 9400 - Fax: +1 480 682 9403
E-Mail: infousa@radiall.com

ALSO REPRESENTED IN

Australia	Hungary	Poland
Austria	Indonesia	Russia
Belgium	Israel	Singapore
Brazil	Korea	Spain
Czech	Latvia	Switzerland
Republic	Lithuania	Taiwan
Denmark	Malaysia	Thailand
Estonia	Norway	Vietnam
Greece	Philippines	South Africa

For the above countries, please contact the local agent or RADIALL at info@radiall.com

ASIA

China - SHANGHAI RADIALL Electronic Co., Ltd.

N° 390 Yong He Road 200072 - SHANGHAI
Tel.: +86 21 66 52 37 88 - Fax: +86 21 66 52 11 77
E-Mail: infozh@radiall.com

Japan - NIHON RADIALL

Shibuya-ku Ebisu 1-5-2, Kougetsu Bldg 405
TOKYO 150-0013
Tel.: +81 3 3440 6241 - Fax: +81 3 3440 6242
E-Mail: infojp@radiall.com

Hong Kong - RADIALL Electronics Ltd.

Flat D, 6/F, Ford Glory Plaza,
37-39 Wing Hong Street
Cheung Sha Wan
KOWLOON HONG KONG
Tel: +852-2959-3833 - Fax: +852-2959-2636
E-Mail: infohk@radiall.com

India - RADIALL India Pvt. Ltd.

25 D, II Phase, Peenya Industrial Area
BANGALORE 560058
Tel.: +91 80 83 95 271 - Fax: +91 80 83 97 228
E-Mail: infoin@radiall.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[OSIS107000](#) [OSIS115000](#) [OSIS107001](#) [OSIS107002](#)