
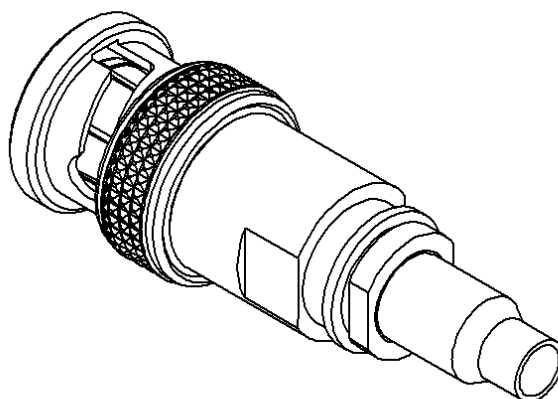
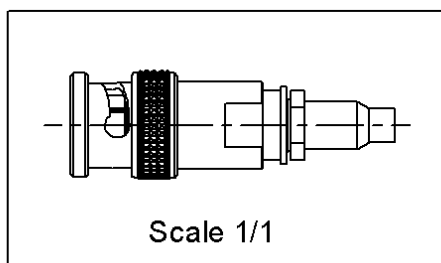


STRAIGHT PLUG CRIMP TYPE


CABLE 3.55/50 S

R141.095.020

Series : BNC

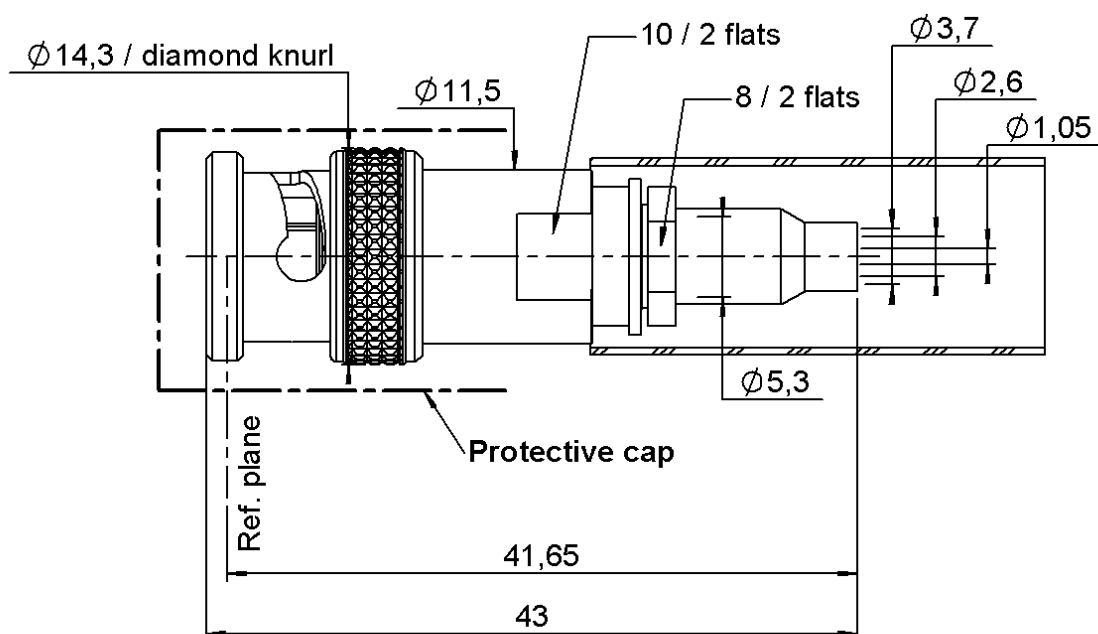

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BRASS	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-
OTHERS PARTS	BRASS	NICKEL 2
-	-	-
-	-	-

Issue : 1406 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


RADIALl®

STRAIGHT PLUG CRIMP TYPE**CABLE 3.55/50 S****R141.095.020**

Series : BNC

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-4	GHz
VSWR	1.35 + 0,0000	x F(GHz) Maxi
Insertion loss	0.115	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (57	- F(GHz)) dB Maxi
Voltage rating	500	Veff Maxi
Dielectric withstanding voltage	1500	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini
Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	170 N.cm
A/F clamp nut	8,0000 mm
Mating life	500 Cycles mini
Weight	17,8540 g

ENVIRONMENTAL

Operating temperature	-65/+165 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATION**ASNE0460-F04****CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	0,00	9,00	23,0	0,00	0,00	0,00

Assembly instruction :

Recommended cable(s)
GSC-03-81748-00

Cable retention

- pull off	120 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
282291	CRIMPING TOOL M22520/1-01	2x4 (pos. 7)
282997	POSITIONER FOR TOOL 282.291(M22520/1-13)	Red
R282235011	CRIMPING DIES M22520/5-11	5.41
R282293000	CRIMPING TOOL M22520/5-01	

OTHERS CHARACTERISTICS

Issue : 1406 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

**RADIALL** ®


STRAIGHT PLUG CRIMP TYPE

CABLE 3.55/50 S

R141.095.020


Series : BNC

COMPONENTS

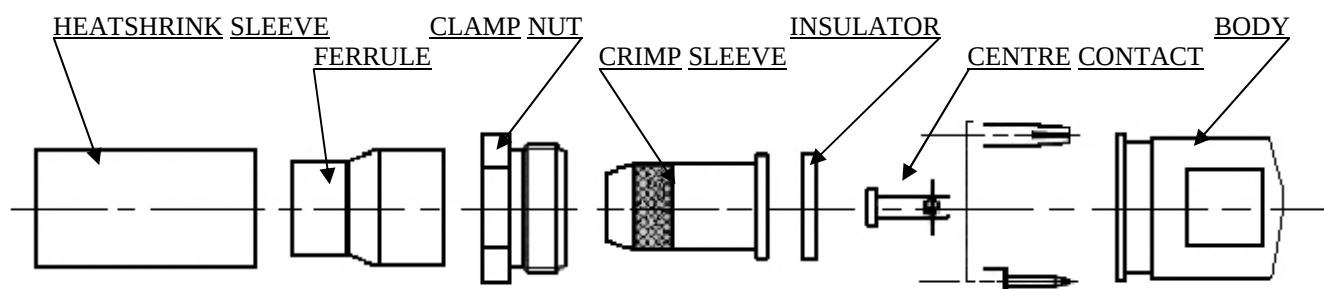


1

Slide onto the cable the heatshrink and the ferrule.
Strip the cable.

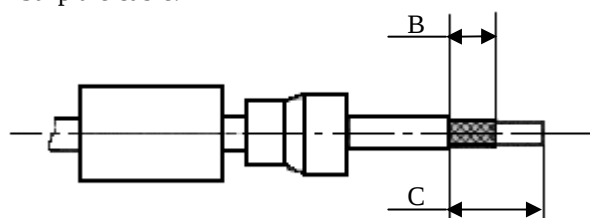


2

Slide the clamp nut onto the crimp sleeve.
Slide sub-assembly under the braid.
Slide ferrule over the braid against clamp nut. (In direction F)
Crimp the ferrule with crimping tool + dies

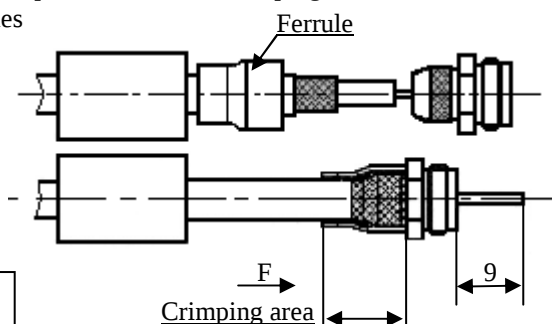


3

Cut the dielectric flush to crimp sleeve.
Mount insulator against crimp sleeve.

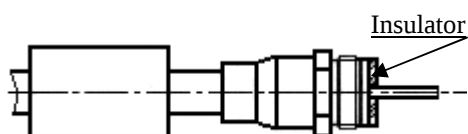


4

Slide the centre contact onto the cable inner conductor against insulator.
Crimp centre contact with the crimping tool and the positioner.

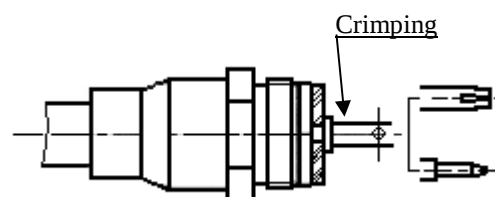

5

Screw sub-assembly into the connector body.
(recommended coupling see the connector TDS)
Slide sleeve over ferrule and heatshrink sleeve in the place.

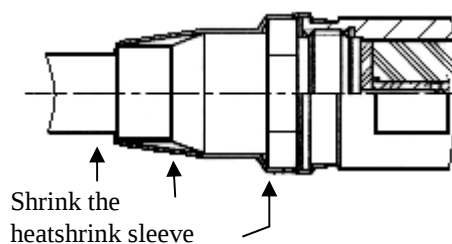

Issue : 1406 C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


RADIALL

®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

[R141095020](#) [R141095020W](#)