


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	ECO #7797	01/05/10	A.D.M.

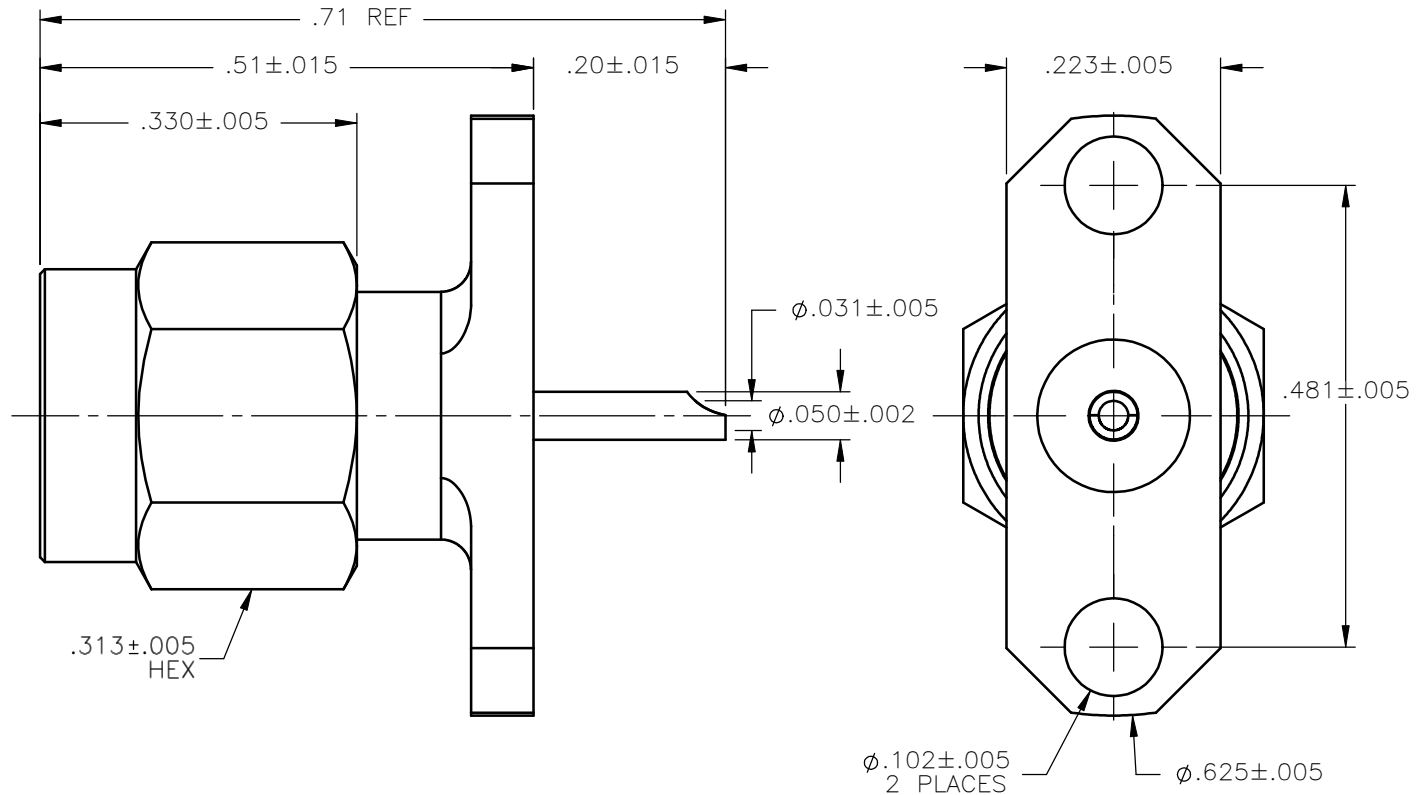

NOTES:

MATERIALS:

1. BODY & COUPLING NUT = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT & RETAINING RING = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
4. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.

FINISHES:

1. BODY & COUPLING NUT = PASSIVATE PER QQ-P-35, TYPE VI.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

Property of Radiall Incorporated
This document cannot be reproduced or
communicated to a third party without prior
written permission of RADIALL Incorporated.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: A.D.M.	DATE 01/05/10	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513			
		CHKD: D.N.	DATE 01/05/10				
DECIMAL	ANGLE	APVD: J.M.	DATE 01/05/10	SMA STRAIGHT PLUG 2 HOLE FLANGE MOUNT SOLDER POT CONTACT			
REFERENCE:		MATERIALS & FINISHES:		SIZE A	FSCM NO. 19505	DWG NO. 9455-9113-000	REV A
ORIGINATED: D.N. DATE: 04/26/96		SEE NOTES		SCALE 5:1	THIRD ANGLE PROJECTION		SHEET 1 OF 1

9455-9113-000

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

9455-9113-000