

SPDT

Contents

Quartz Series

SMT Power Micro-SPDT with 26.5 GHz capabilities: R516 Series 2-2 to 2-9

Ramses Series

SPDT up to 50 GHz: R570 Series (miniature models) 2-10 to 2-15

SPDT up to 18 GHz: R570 Series (N, BNC and TNC models) 2-16 to 2-19

Electrical Schematics

R570 Series 2-20 to 2-23

Platinum Series

High Performance SPDT up to 40 GHz: R595 Series 2-24 to 2-29

Optional Features 2-30

SPDT PART NUMBER SELECTION GUIDE*

Digital Position	RAMSES		PLATINUM	Series	R 1-3:	4: RF connectors	5: Type	6: Voltage	7: TTL opt./ model	8: Options	9: Terminals	10: Document- ation
	Quartz SPDT	SPDT										
	R516	R570	R570	R595		DC - 8 GHz						
	3	-	-	-		DC - 18 GHz						
	4	-	-	-		DC - 26.5 GHz						
	7	-	-	-		SMA 3 GHz						
	-	-	3	-		SMA 6 GHz						
	-	-	-	4		SMA 18 GHz						
	-	-	-	-		SMA 20 GHz						
	-	-	F	F		SMA 26.5 GHz						
	-	-	8	8		SMA 2.9 40 GHz						
	-	-	J	-		2.4mm 50 GHz						
	-	-	E	-		QMA 6 GHz						
	-	-	9	-		DIN 1.6/5.6, 2.5 GHz						
	-	-	H	-		-						
	-	-	A	-		Pc board mount 3 GHz						
	-	0	-	-		N 3 GHz						
	-	1	-	-		N 12.4 GHz						
	-	2	-	-		BNC 3 GHz						
	-	5	-	-		TNC 3 GHz						
	-	6	-	-		TNC 12.4 GHz						
	-	D	-	-		TNC 18 GHz						
	1/9	1/2	1/2	-		Failsafe						
	3	3/4/5/6	3/4/5/6	3/4/5/6		Latching						
	1	-	-	-		6 V						
	2	2	2	-		12 V						
	-	-	-	7		15 V						
	3	-	-	3		24 V						
	-	3	3	-		28 V						
	-	0	0	-		Without						
	-	1	1	-		With						
	-	-	-	1		SPDT non-terminated						
	1	-	-	-		-						
	-	0	0	1		Without option						
	-	1	1	1		Positive common						
	-	3	3	-		Supression diodes						
	-	4	4	-		Suppression diodes and positive common						
	-	-	-	2		Compatible with TTL driver						
	0	-	-	-		-						
	0	-	-	-		Not soldered						
	T	-	-	-		Soldered on a connectorized test fixture						
	-	0	0	0		Solder pins						
	-	5	-	5		D-Sub connector						
	-	-	-	-		Certificate of conformity						
	-	-	-	-		Calibration certificate						
	-	-	-	-		Calibration certificate + RF curves						

Example of P/N: R570F12010 is a SPDT SMA 26.5 GHz, failsafe, 12 Vdc, without TTL, with positive common, solder pins.

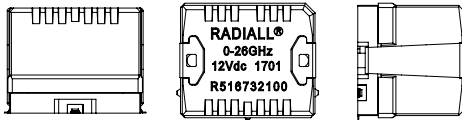
*For part number creation and available options, see detailed part number selection for each series.

SMT Power Micro SPDT with 26.5 GHz Capabilities

SURFACE MOUNT TECHNOLOGY




Actual Size



Typical Outline Drawing

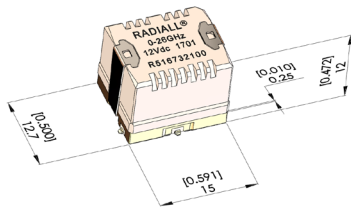All dimensions are in millimeters [inches].



An innovative and original "micro-mechanical" design of the R516 SMT micro-relay offers, excellent RF performance, reliability, and repeatability. The miniature size, and low installation cost make these coaxial switches an ideal solution.

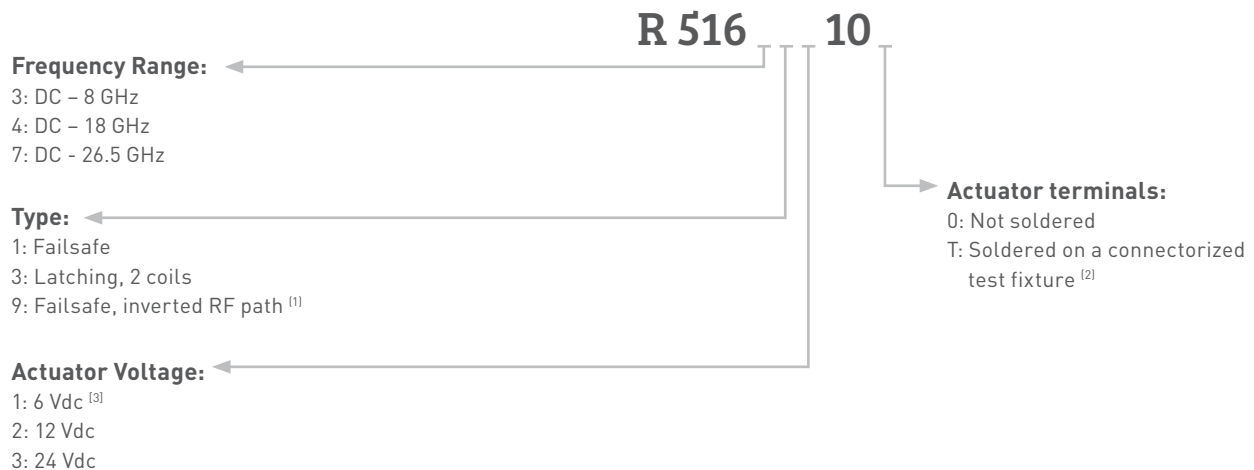
Very low return loss and insertion loss allow this relay to be used in power applications, as well as in typical SMT relay applications such as RF attenuators, RF matrices, spectrum analysers, and telecommunications.

Failsafe models are offered in two RF configurations (direct and inverted). The association of these two products on the same PC board enables the product to perform the bypass function. (For bypass mounting, further information is available on page 2-7).

Example of P/N:

R516713100 is a SPDT SMT 26.5 GHz, 24 Vdc, failsafe, not soldered.

PART NUMBER SELECTION



NOTE:

(1): Can be combined with a failsafe model, so as to achieve the "BYPASS" function (see application details on page 2-6)


(2): See details about test fixture dimensions on page 2-4

(3): Only available with type 3

SMT Power Micro SPDT with 26.5 GHz Capabilities**QUARTZ GENERAL SPECIFICATIONS**


Operating mode		Failsafe (types 1 and 9)		Latching (type 3)			
Nominal operating voltage (across temperature range)	Vdc	12 (10.5 to 13)	24 (21.5 to 30)	6 (5.1 to 6.6)	12 (10.2 to 13)	24 (20.5 to 30)	
Coil resistance at 23°C (+/-10%)	Ω	195	740	55	205	865	
Operating current at 23°C	mA	61	32	108	58	32	
RF and command ports		Gold plated access, infrared reflow, forced air oven or hand soldering (Compatible with “lead free” soldering processes)					
Switching time at nominal voltage	- Making contacts - Breaking contacts	Max 5 ms (typical 2 ms), including contact bounce time 3 ms					
Life	- Cold switching (max 120 cycles/min) - Hot switching (max 20 cycles/min)	2 million cycles		3 million cycles (5 million cycles typical at low level)			
		500.000 cycles					
Insulation		Dielectric test voltage		300 Vrms			
		Insulation resistance at 500 Vdc		> 100 MOhms			
Environmental protection		Lead free construction - Waterproof (acc. To IEC 60529 / IP64)					
Mass		8 g					
Operating temperature range (with no icing nor condensation)	°C	-25 to +70 ⁽¹⁾		-40 to +85			
Storage temperature range	°C	- 55 to +85					
Sine vibration (MIL STD 202, Method 204D)		Condition D: 10-2000 Hz, 20 g		Operating			
		Condition G: 10-2000 Hz, 30 g		Non-operating			
Shocks (According to MIL STD 202, Method 213B, Cond. C)		100g / 6 ms, 1/2 sine		Operating			

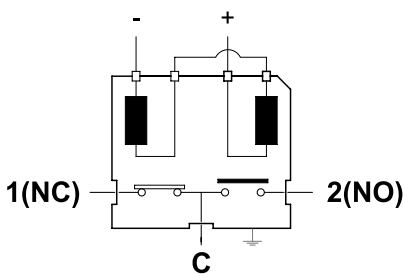(1): Failsafe models may be used down to -40°C, for this application please follow requirements of AN-R516-51. Contact Radiall for a copy of this application note.

PIN IDENTIFICATION (TOP VIEW)


**Failsafe model
(Type 1)**

Voltage	RF continuity
De-energized	C <--> 1(NC)
Energized	C <--> 2(NO)

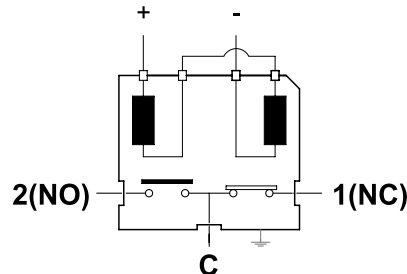

**Inverted failsafe model for
Bypass application (Type 9)**

Voltage	RF continuity
De-energized	C <--> 1(NC)
Energized	C <--> 2(NO)




**Latching model
(Type 3)**


Voltage	RF continuity
-1 +1	C <--> 1
-2 +2	C <--> 2

SMT Power Micro SPDT with 26.5 GHz Capabilities**QUARTZ PERFORMANCE (S PARAMETERS AVAILABLE ON REQUEST)**

Frequency range GHz		V.S.W.R. (max)	Insertion loss (max) dB	Isolation (min) dB	Third order Inter modulation	Impedance Ω
				switch alone		
DC - 8	DC - 3	1.20	0.20	50	-110 dBc typical at 1730 MHz (2 carriers 20 W)	50
	3 - 6	1.35	0.40	40		
DC - 18	6 - 8	1.40	0.50	40		
	8 - 12.4	1.50	0.60	40		
DC - 26.5	12.4 - 18	1.70	1.00	40		
	18 - 26.5	2.00	1.60	40		

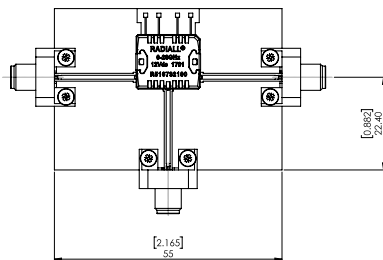MEASUREMENT METHODRelay soldered on test fixture ⁽⁷⁾



Calibration board



All dimensions are in millimeters [inches].

Inputs/Outputs of the calibration board and test fixture are equipped with coaxial type receptacle connectors. The length of the RF tracks is the same on the calibration board and the test fixture circuits. The insertion loss of the relay itself is calculated by subtracting the insertion loss of the “calibration board” to the insertion loss of the “relay soldered on the test fixture.”

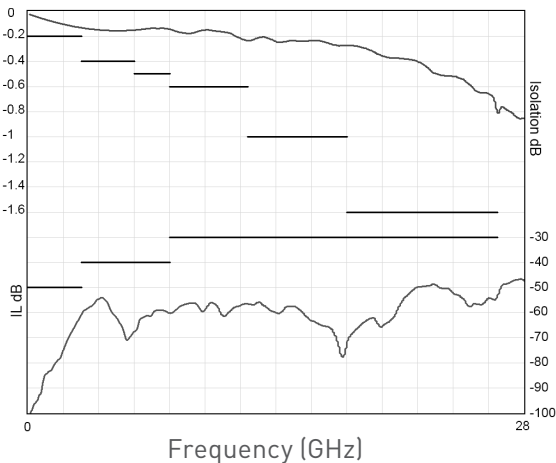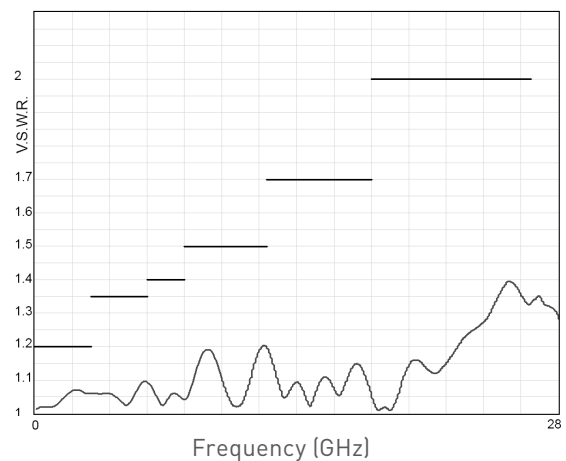(7): Relay soldered on Test Fixture is available. To order, please use the suffix "T" (part number R516 - - - - T), as explained in page 2-2.


TYPICAL RF PERFORMANCE**Insertion Loss and Isolation****V.S.W.R**

SMT Power Micro SPDT with 26.5 GHz Capabilities**RF POWER RATING FOR COLD SWITCHING USE**

(Impedance 50 Ohms, V.S.W.R. < 1.25)

Power level depends on environmental conditions:

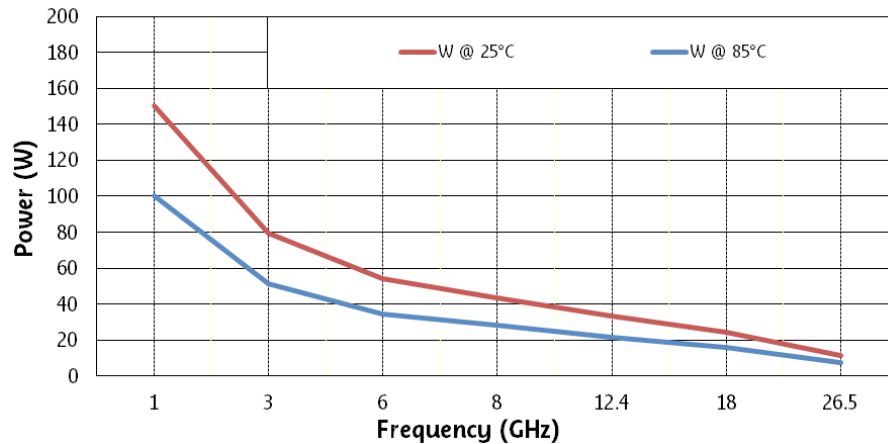- R516 series have been designed to be used without a cooling fan even for high power applications. However, the power capability may be still improved by using the appropriate cooling fan.
- For failsafe models used with coil permanently supplied (N/O position), the same power level as latching models may be applied.

**RELAY PACKAGING**

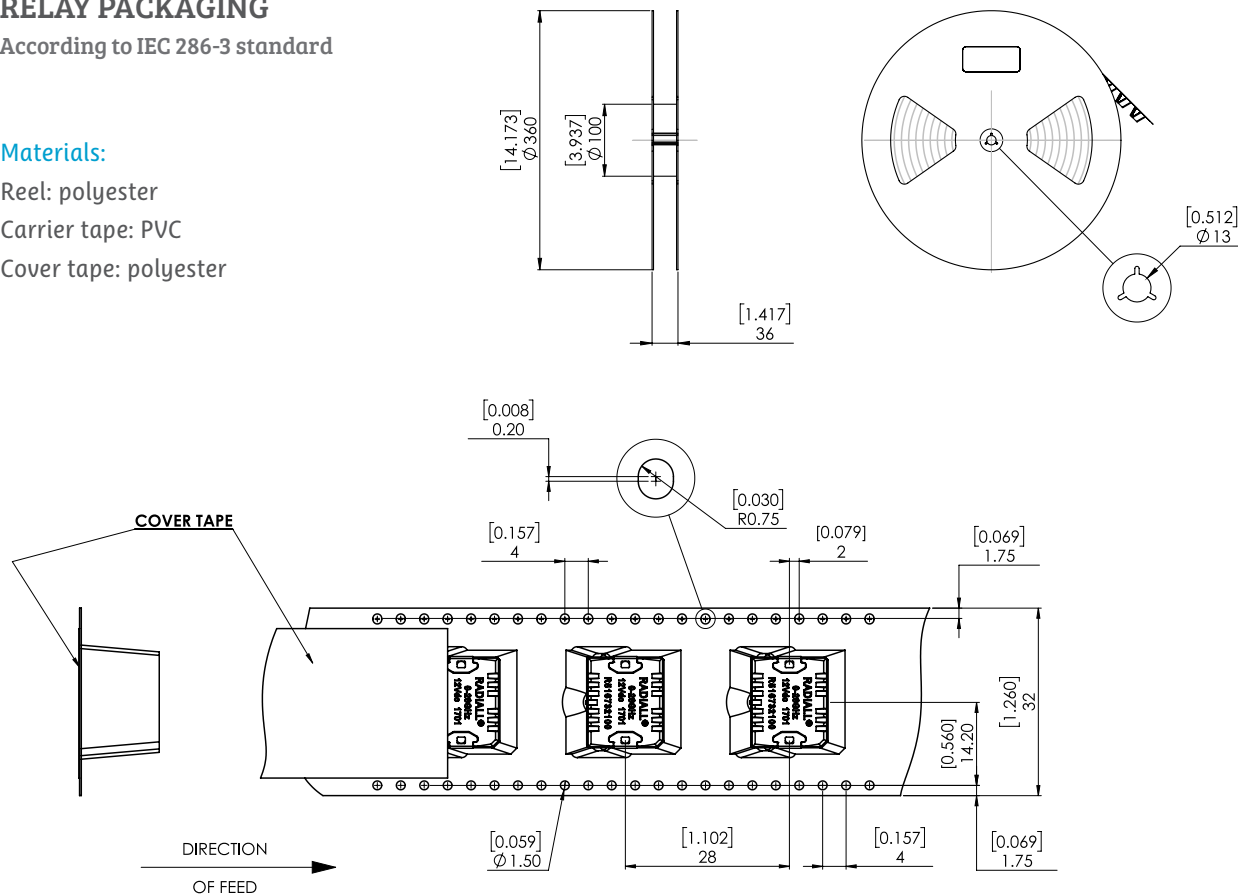
According to IEC 286-3 standard

Materials:

Reel: polyester


Carrier tape: PVC

Cover tape: polyester




SMT Power Micro SPDT with 26.5 GHz Capabilities

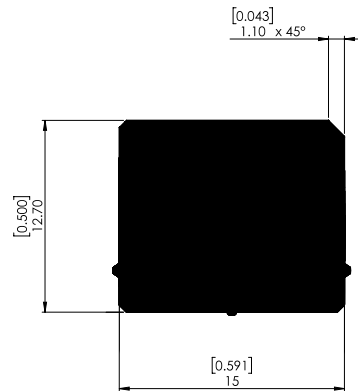Video shadow of the relay




Aspiration area



All dimensions are in millimeters [inches].

BYPASS APPLICATION

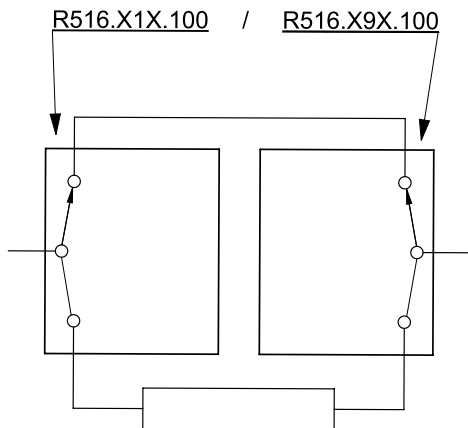Failsafe Micro-relay typical implantation




SPDT relays (Single Pole Double Throw) can be used to achieve a bypass switch function. For SMT applications, R516 series, relays are available in two failsafe versions, standard and inverted, to provide symmetric RF ports implantation possibility. The “side by side” implementation of these two versions on a PCB effectively produces the bypass function. The package size is reduced and interconnecting tracks are shortened. Required in order to protect the receiver for transmit/receive applications. RF performance of bypass switch assemblies depend on the distance between the two RF SMT relays.

SMT Power Micro SPDT with 26.5 GHz Capabilities**PC BOARD MOUNTING**

Board layout

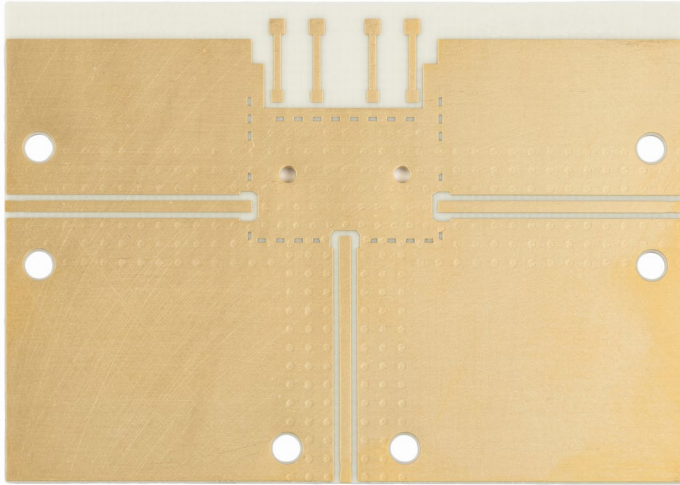DXF or Gerber format file available upon request.

**Substrate types**

Recommended substrates are ROGERS RO4003.,
Thickness 0.508 mm Cu double side 17.5 μm .

**Recommended total thickness of RF tracks (copper over
thickness + plating): 40 μm .**
Other substrates may be used.

Please contact your local sales representative for additional information.

SMT Power Micro SPDT with 26.5 GHz Capabilities**RECOMMENDED SOLDERING PROCEDURE****A - Soldering procedure using automatic pick and place equipment****1 - Solder paste:**

R516 series are "Lead Free", and Lead Free Sn-Ag3.5-Cu0.7 solder cream may be used as well as standard Sn63-Pb35-Ag2. RADIALl recommends using a "no clean - low residue" solder cream (5% solid residue of flux quantity) that will permit the elimination of the cleaning operation step after soldering.

Note: Due to the gold plating of the switch PCB interface, it is important to use a paste made with silver. This will help in avoiding formation of intermetallics as part of the solder joint.

2 - Solder paste deposition:

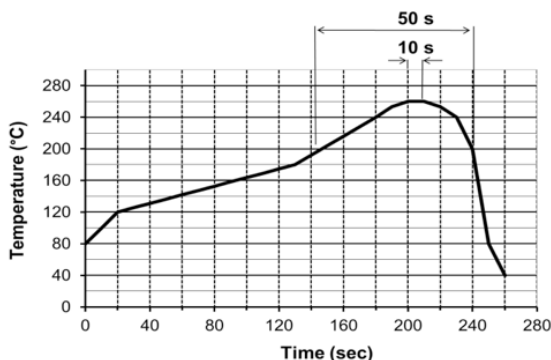
Solder cream may be applied on the board with screen printing or dispenser technologies. For either method, the solder paste must be coated to appropriate thickness and shapes to achieve good solder wetting. Please optically verify that the edges of the zone are clean and without contaminates, and that the PCB zoned areas have not oxydated. The design of the mounting pads and the stenciling area are available upon request, for a thickness of the silk-screen printing of 0.15 mm (0.006").

3 - Placement of the component:

For small lightweight components such as chip components, a self-alignment effect can be expected if small placement errors exist. However, this effect is not as expected for relays components and they require a accurate positioning on their soldering pads, typically ± 0.1 mm (± 0.004 "). Place the relay onto the PCB with automatic pick and place equipment. Various types of suction can be used. Radiall does not recommend using adhesive agents on the component or on the PCB.

4 - Soldering: infra-red process:

Please follow the Radiall recommended max temperature profile for infra-red reflow or forced air convection:



Higher temperature ($>260^{\circ}\text{C}$) and longer process duration would permanently damage the switches.

5 - Cleaning procedure:

On miniature relays, high frequency cleaning may cause the contacts to stick. If cleaning is needed, please avoid ultrasonic cleaning and use alcohol based cleaning solutions.



In-line cleaning process, spraying, immersion, especially under temperature, may cause a risk of degradation of internal contacts. For such cleaning process please contact us.

6 - Quality check:

Verify by visual inspection that the component is centred on the mounting pads. Solder joints: verify by visual inspection that the formation of meniscus on the pads are proper.

B - Soldering procedure by manual operation

Manual soldering is not recommended for high frequencies, as it generates resonance and lower RF characteristics due to gaps between PC board and relay grounds.

1 - Solder paste and flux deposition:

Refer to procedure A - 1. Deposit a thin layer of flux on solder pad area. Allow the flux to evaporate a few seconds before applying the solder paste, it will prevent dilution of the paste.

2 - Solder paste deposition:

Radiall recommends depositing a small amount of solder paste on solder pad area by syringe, according to the manual soldering pattern (available upon request). Be careful, not to apply solder paste outside of the zone area.

3 - Placement of the component:

During manipulation, avoid contaminating gold surfaces by contact with fingers. Place the component on the mounting zone by pressing on the top of the relay lid.

4 - Hand soldering:

Iron wattage 30 to 60 W. To keep better RF characteristics, apply pressure on the relay lid during all the soldering stage, so as to reduce the air gap between the PC board and the relay. If possible, fix the ground plane of the relay on the board with two M1.2 screws before the soldering stage. On each side of the central RF access, the RF body edge must be soldered to the ground of the PC board. To improve RF characteristics and avoid soldering the RF body to the ground, a conductive gasket may be used (please contact us for detailed application note).

5 - Cleaning procedure:

Refer to procedure A - 5.

6 - Quality check:

Verify by visual inspection that component is centred on the mounting pads. Solder joints: verify by visual inspection that there is no solder excess on the RF pads.

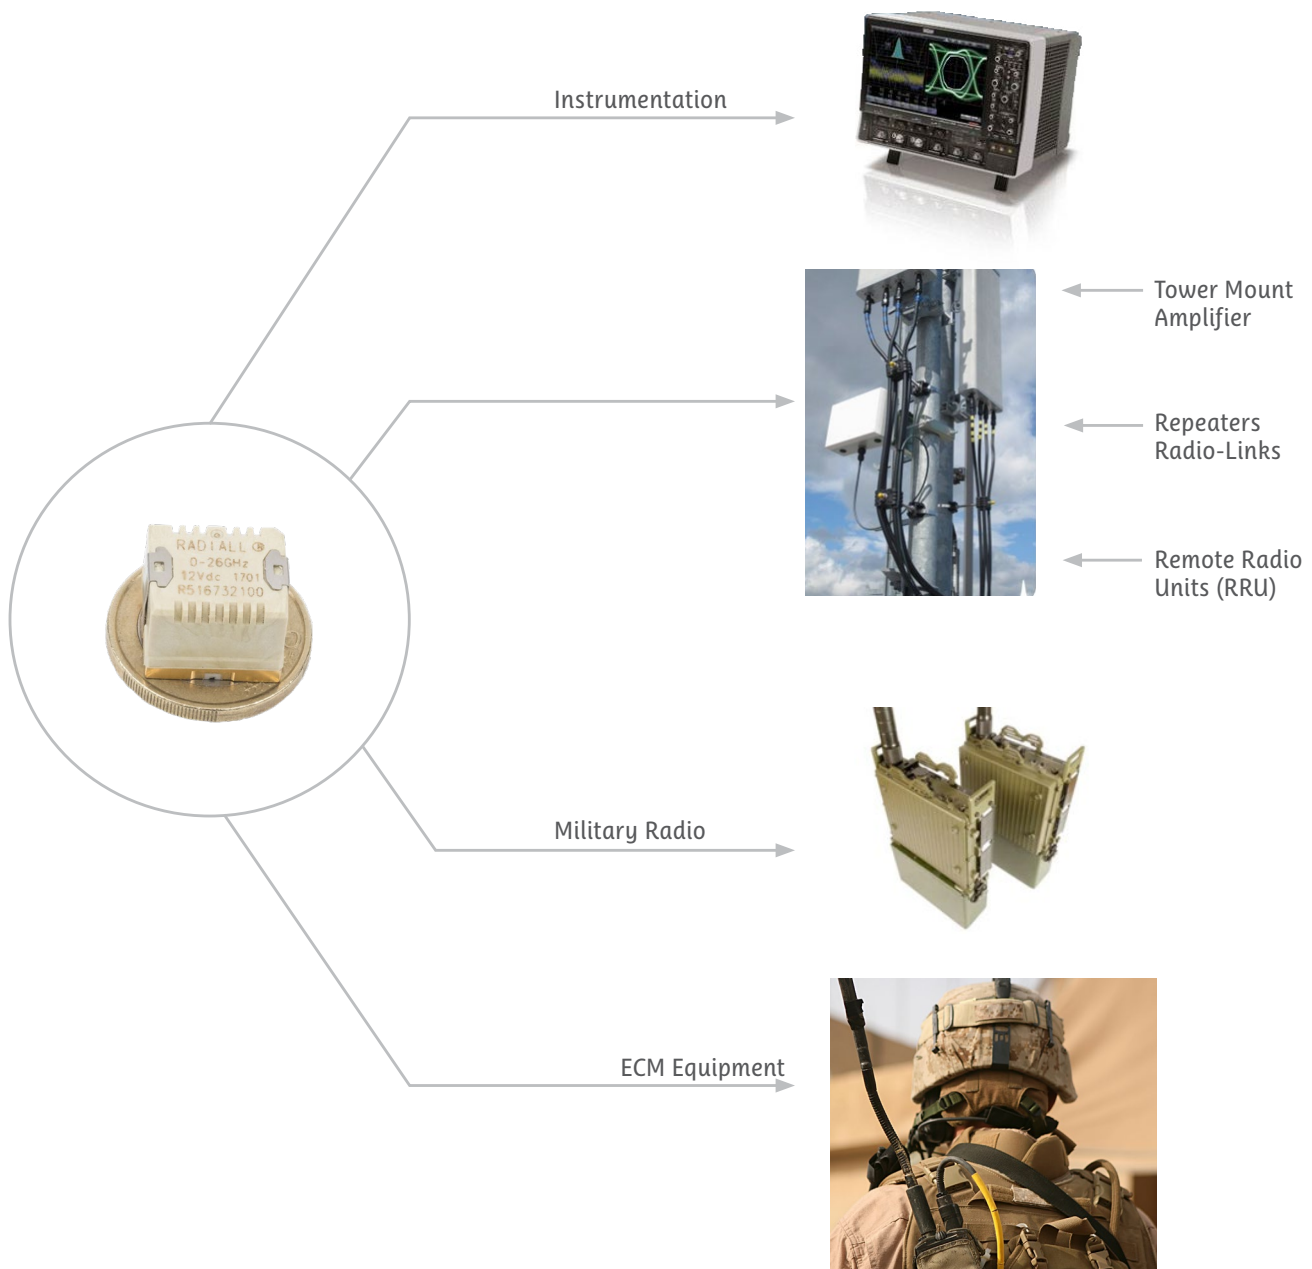
Applications

PC BOARD MOUNTING

The SMT Series offers a large range of products which can be used in many applications such as:

- Tower mount amplifiers
- Instrumentation
- Military radios
- ECM equipment
- Remote Radio Unit (RRU)
- Radio-Links
- Repeaters

These products offer the same RF Board and soldering process as all RF components but with a reduced weight and size. They are designed to meet all market specifications.



SPDT up to 50 GHz

PC Board - SMA - SMA 2.9 - 2.4 mm - QMA - DIN 1.6/5.6

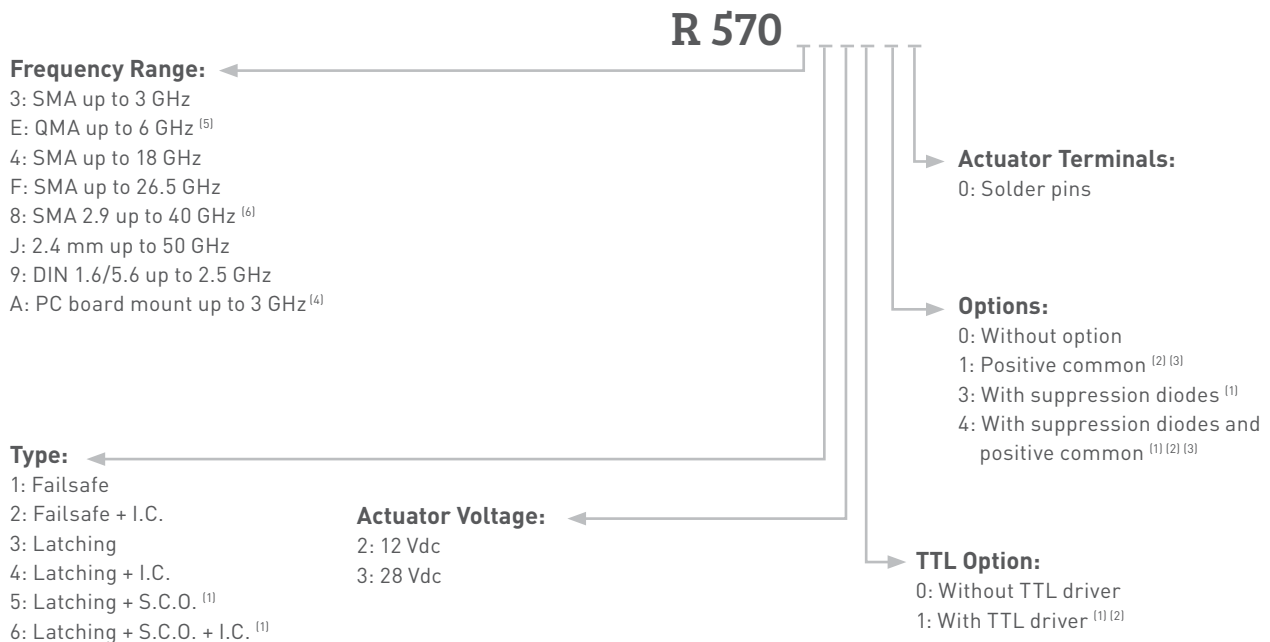


Radiall's RAMSES SPDT switches offer excellent reliability, high performance and operating frequencies from DC to 50 GHz. Radiall's RAMSES concept (which provides for a life span of 10 million cycles) offers a variety of options to meet customer needs.

These switches are dedicated to all market applications including: military, instrumentation and telecommunications.

Example of P/N:

R570413100 is a SPDT SMA 18 GHz, failsafe, 28 Vdc, with TTL driver, without option, solder pins.

PART NUMBER SELECTION**NOTE:**

I.C.: Indicator contact - S.C.O.: Self Cut-Off

(1): Suppression diodes are already included in Self Cut-OFF & TTL option

(2): Polarity is not relevant to application for switches with TTL driver

(3): Positive common shall be specified only with type 3, 4, 5 and 6 because failsafe switches can be used with both polarities

(4): Available only upon request



(5): The QLF trademark (Quick Lock Formula®) standard applies to QMA and QN series and guarantees the full intermateability between suppliers using this trademark. Using QLF certified connectors also guarantees the specified level of RF performance.

(6): Connector SMA 2.9 is equivalent to "K connector®", registered trademark of Anritsu.

SPDT up to 50 GHz

PC Board - SMA - SMA 2.9 - 2.4 mm - QMA - DIN 1.6/5.6

GENERAL SPECIFICATIONS

Operating mode		Failsafe		Latching	
Nominal operating voltage (across temperature range)	Vdc	12 (10.2 to 13)	28 (24 to 30)	12 (10.2 to 13)	28 (24 to 30)
Coil resistance at 23°C (+/-10%)	Ω	47.5	275	58	350
Operating current at 23°C	mA	250	102	210	80
Average power		See Power Rating Chart page 1-13			
TTL Input	High level	2.2 to 5.5 Volts		800 µA max 5.5 Volts	
	Low level	0 to 0.8 Volts		20 µA max 0.8 Volts	
Indicator rating		1 W / 30 V / 100 mA			
Switching time		ms	10		
Life	SMA - SMA 2.9 - QMA		10 million cycles		
	DIN 1.6/5.6 - Pc Board		5 million cycles		
	2.4 mm		2 million cycles		
Connectors		SMA - SMA 2.9 - QMA - DIN 1.6/5.6 - Pc Board - 2.4 mm			
Operating temperature range	DIN 1.6/5.6 - 2.4 mm		-25°C to +70°C		
	SMA - SMA 2.9 - QMA - Pc Board		-40°C to +85°C		
Storage temperature range	DIN 1.6/5.6 - 2.4 mm		-40°C to +85°C		
	SMA - SMA 2.9 - QMA - Pc Board		-55°C to +85°C		
Vibration (MIL STD 202, Method 204D, cond.D)		10-2000 Hz, 20 g		Operating	
Shock (MIL STD 202, Method 213B, cond.C)		100 g / 6 ms, ½ sine		Operating	

RF PERFORMANCE

Connectors	Frequency range GHz		V.S.W.R. (max)	Insertion loss (max) dB	Isolation(min) dB	Impedance Ω
DIN 1.6/5.6	DC - 2.5	DC - 1	1.20	0.20	80	75
		1 - 2.5	1.30	0.30	70	
QMA	DC - 6	DC - 3	1.20	0.20	80	50
		3 - 6	1.30	0.30	70	
SMA	DC - 3	DC - 3	1.10	0.15	80	
		3 - 8	1.20	0.20	75	
	DC - 18	8 - 12.4	1.20	0.25	65	
		12.4 - 18	1.40	0.35	60	
	DC - 26.5	18 - 26.5	1.50	0.50	55	
SMA 2.9	DC - 40	DC - 6	1.30	0.30	70	
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
PC Board	DC - 3	DC - 3	1.20	0.20	80	
2.4 mm	DC - 50	DC - 6	1.30	0.30	70	
		6 - 12.4	1.40	0.40	60	
		12.4 - 18	1.50	0.50	60	
		18 - 26.5	1.70	0.70	55	
		26.5 - 40	1.90	0.80	50	
		40 - 50	1.90	1.10	50	

NOTE:

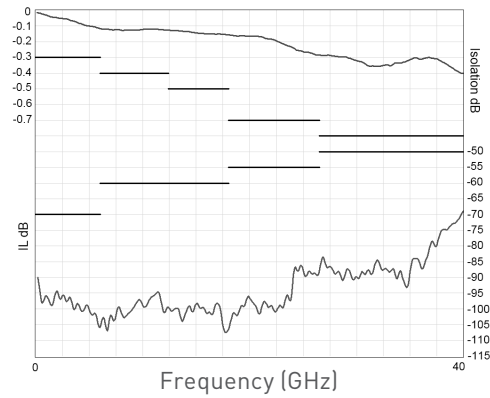
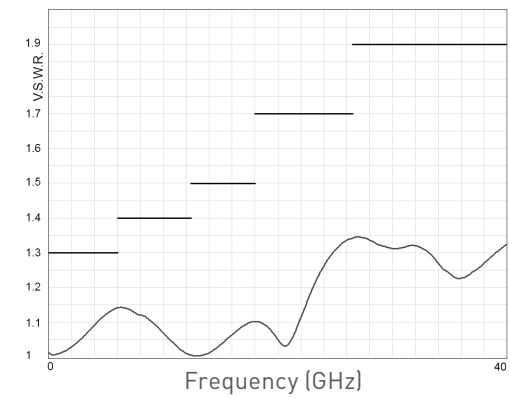
See page 2-12 and 2-13 for typical RF performance.

SPDT up to 50 GHz



PC Board - SMA - SMA 2.9 - 2.4 mm - QMA - DIN 1.6/5.6

R570 TYPICAL RF PERFORMANCE



Example: SPDT SMA 2.9 up to 40 GHz

Insertion Loss and Isolation**V.S.W.R.**

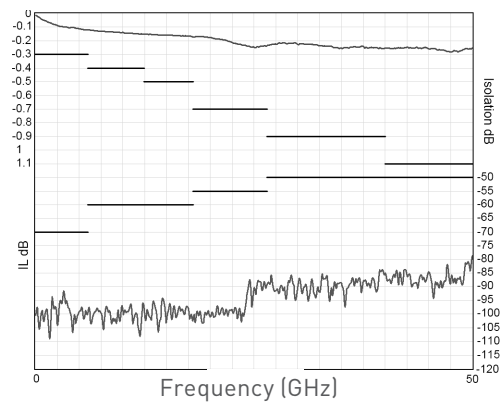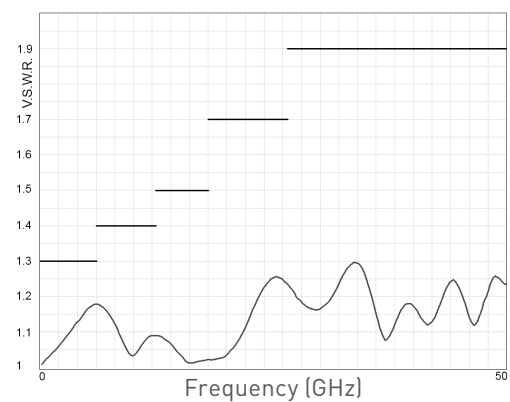Example: SPDT 2.4 mm up to 50 GHz

Insertion Loss and Isolation**V.S.W.R.**

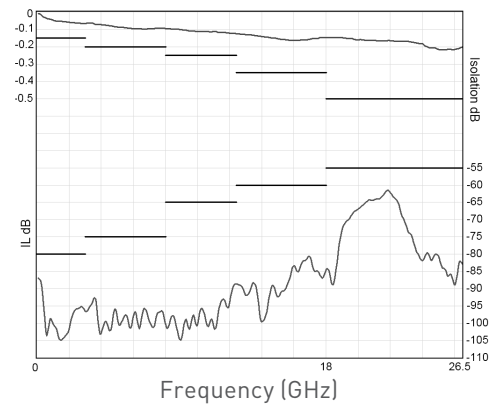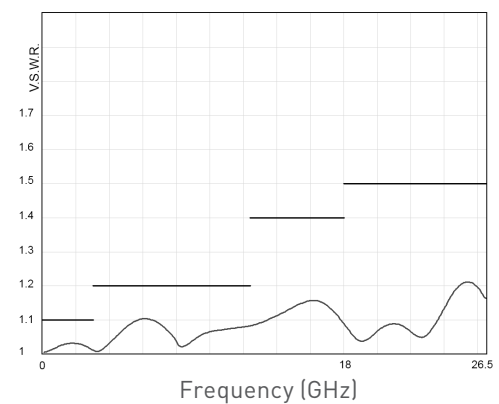Example: SPDT SMA up to 26.5 GHz



Insertion Loss and Isolation**V.S.W.R.**

SPDT up to 50 GHz



PC Board - SMA - SMA 2.9 - 2.4 mm - QMA - DIN 1.6/5.6

R570 TYPICAL RF PERFORMANCE

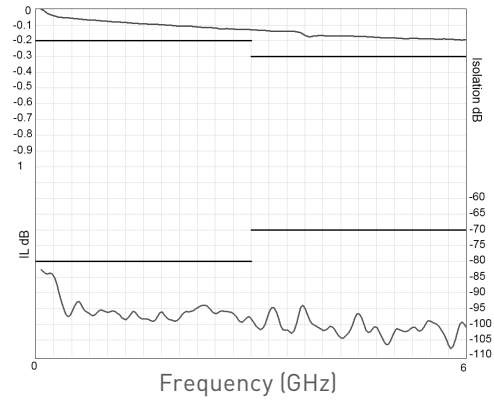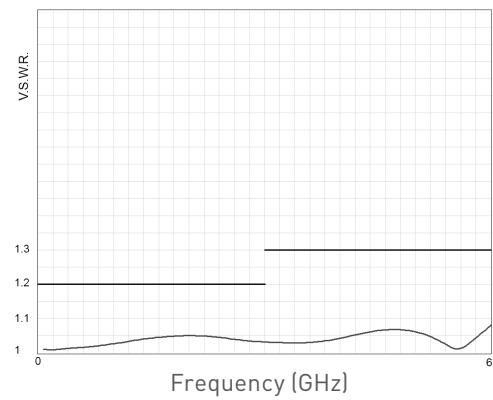Example: SPDT QMA up to 6 GHz

Insertion Loss and Isolation**V.S.W.R.**

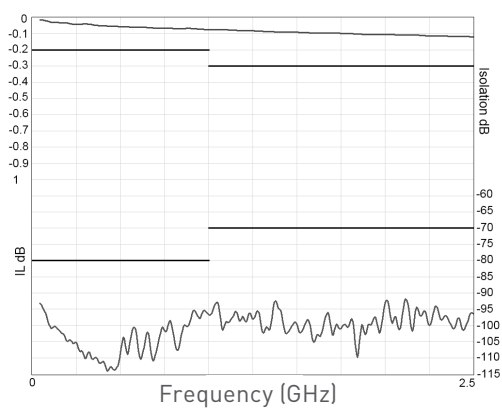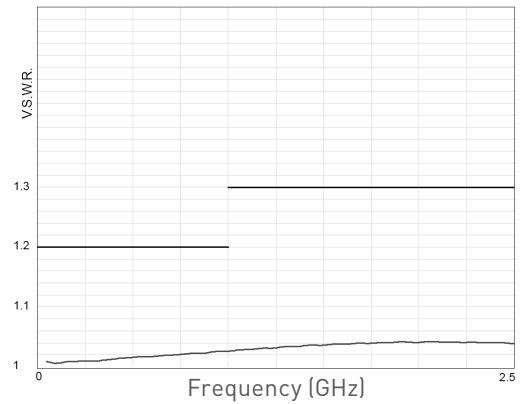Example: SPDT DIN 1.6/5.6 up to 2.5 GHz



Insertion Loss and Isolation**V.S.W.R.**

SPDT up to 50 GHz

PC Board - SMA - SMA 2.9 - 2.4 mm - QMA - DIN 1.6/5.6

TYPICAL OUTLINE DRAWING

Connectors	A max (mm [inches])
SMA	7.7 [0.303]
SMA 2.9 and 2.4 mm	6.7 [0.264]
QMA	10.8 [0.394]
DIN 1.6/5.6	11.5 [0.433]
PC Board	4.5 [0.157]

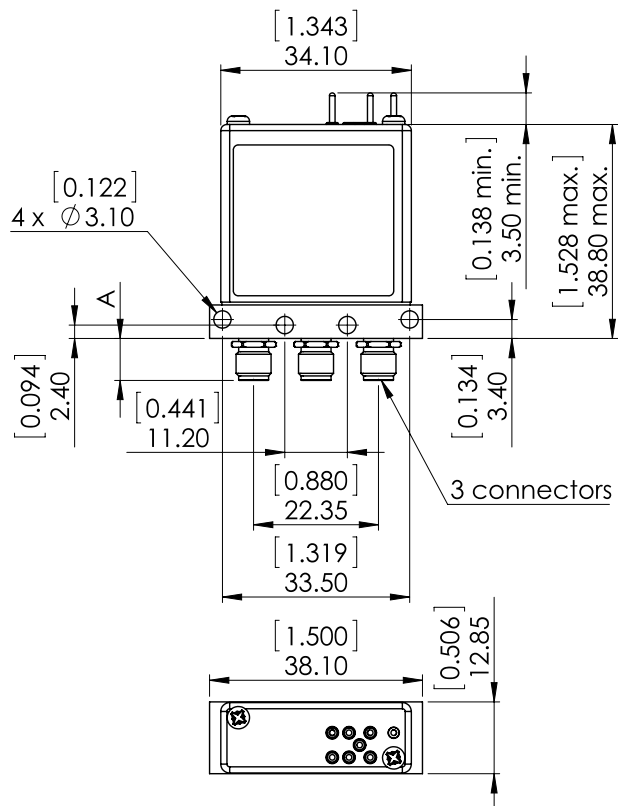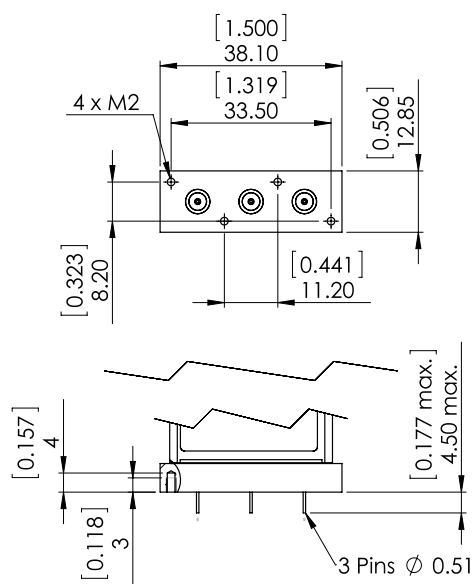

See page 2-23 for pin identification.

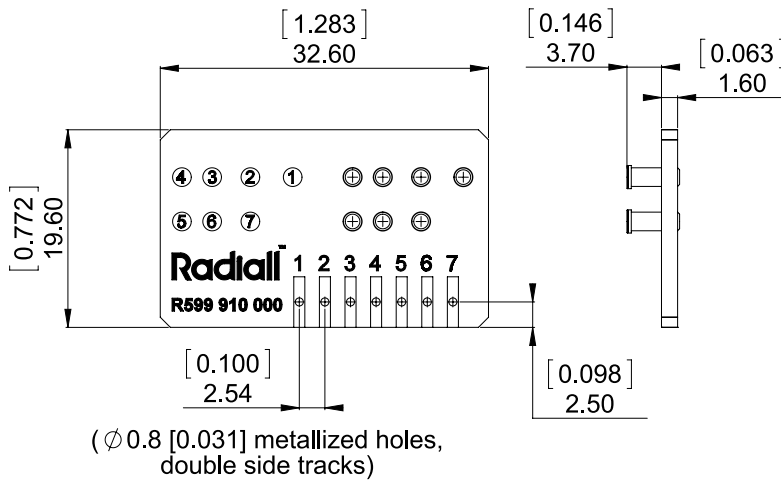
All dimensions are in millimeters [inches].

SPDT up to 50 GHz

PC Board - SMA - SMA 2.9 - 2.4 mm - QMA - DIN 1.6/5.6

ACCESSORIES

A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals. For SPDT model R570 series = Radiall part number: **R599 910 000**



All dimensions are in millimeters [inches].

The PCB accessory pin number assignment is independant from the pin identification table of the switch.

SPDT up to 18 GHz

N - TNC - BNC



Radiall's RAMSES SPDT N, BNC and TNC switches are designed for high performance in RF & Microwave systems up to 18 GHz.

Radiall's RAMSES concept (modular concept) offers a full range of configurations. They are commonly used for applications where high power handling capability is required.

These switches are dedicated to all market applications including: defense, instrumentation and telecommunications.

Example of P/N:

R570113035 is a SPDT N 12.4 GHz, failsafe, 28 Vdc, with suppression diodes, without option, D-Sub connector.

PART NUMBER SELECTION**R 570****Frequency Range:**

- 0: N up to 3 GHz
- 1: N up to 12.4 GHz
- 2: BNC up to 3 GHz
- 5: TNC up to 3 GHz
- 6: TNC up to 12.4 GHz
- D: TNC up to 18 GHz

Type:

- 1: Failsafe
- 2: Failsafe + I.C.
- 3: Latching
- 4: Latching + I.C.
- 5: Latching + S.C.O. ⁽¹⁾
- 6: Latching + S.C.O. + I.C. ⁽¹⁾

Actuator Voltage:

- 2: 12 Vdc
- 3: 28 Vdc

Actuator Terminals:

- 0: Solder pins
- 5: D-Sub connector

Options:

- 0: Without option
- 1: Positive common ^{(2) (3)}
- 3: With suppression diodes ⁽¹⁾
- 4: With suppression diodes and positive common ^{(2) (3)}

TTL Option:

- 0: Without TTL driver
- 1: With TTL driver ^{(1) (2)}

NOTE:

I.C.: Indicator contact - S.C.O.: Self Cut-Off

(1): Suppression diodes are already included in Self Cut-OFF and TTL option

(2): Polarity is not relevant to application for switches with TTL driver

(3): Positive common shall be specified only with type 3, 4, 5 and 6 because failsafe switches can be used with both polarities

SPDT up to 18 GHz

N - TNC - BNC

GENERAL SPECIFICATION

Operating mode		Failsafe		Latching	
Nominal operating voltage (across temperature range)	Vdc	12	28	12	28
		{10.2 to 13}	{24 to 30}	{10.2 to 13}	{24 to 30}
Coil resistance at 23°C (+/-10%)	Ω	38	200	38	225
Operating current at 23°C	mA	320	140	320	125
Average power		See Power Rating Chart page 1-13			
TTL input	High level	2.2 to 5.5 Volts		800 μA max 5.5 Volts	
	Low level	0 to 0.8 Volts		20 μA max 0.8 Volts	
Indicator rating	ms	1 W / 30 V / 100 mA			
Switching time	ms	10			
Life		2.5 million cycles			
Connectors		N - TNC - BNC			
Actuator terminals		Solders pins or 9 pin D-Sub connector			
Operating temperature range		-40°C to +85°C			
Storage temperature range		-55°C to +85°C			
Vibration (MIL STD 202, Method 204D, cond.D)		10-2000 Hz, 20 g		Operating	
Shock (MIL STD 202, Method 213B, cond.C)		100 g, 6 ms, ½ sine		Non operating	

RF PERFORMANCE

Connectors	Frequency Range GHz		V.S.W.R. (max)	Insertion Loss (max) dB	Isolation (min) dB	Impedance Ω
N / TNC	DC - 3 DC - 12.4	DC - 1	1.15	0.15	85	50
		1-2	1.20	0.20	80	
		2 - 3	1.25	0.25	75	
		3 - 8	1.35	0.35	70	
		8 - 12.4	1.50	0.50	60	
TNC 18	DC - 18	DC - 6	1.30	0.30	70	
		6 - 12.4	1.50	0.50	60	
		12.4 - 18	1.60	0.70	60	
BNC	DC - 3	DC - 1	1.15	0.15	85	
		1 - 2	1.20	0.20	80	
		2-3	1.25	0.25	75	

NOTE:

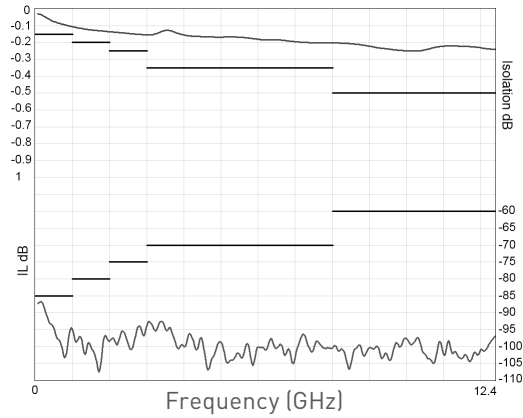
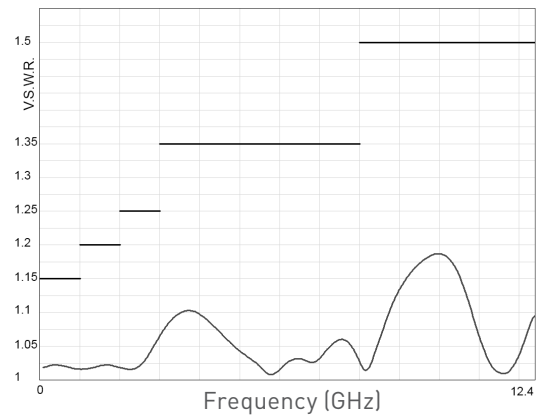
See page 2-18 for typical RF performance.

SPDT up to 18 GHz



N - TNC - BNC

R570 TYPICAL RF PERFORMANCE

Example: SPDT N and TNC up to 12.4 GHz



Insertion Loss and Isolation**V.S.W.R.**

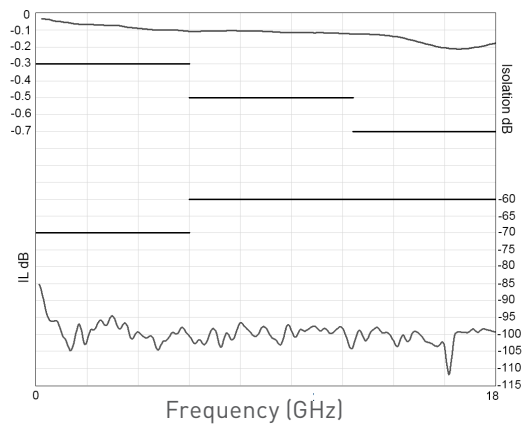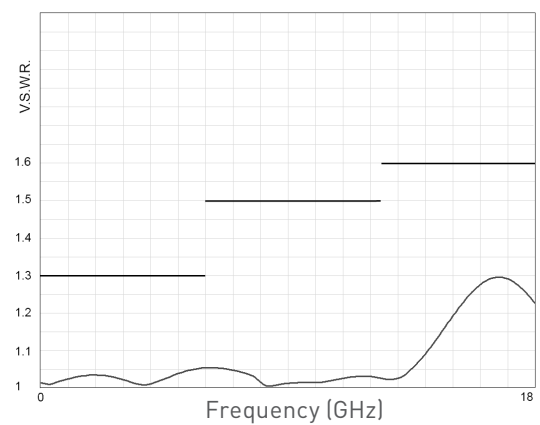Example: SPDT TNC up to 18 GHz

Insertion Loss and Isolation**V.S.W.R.**



TYPICAL OUTLINE DRAWING

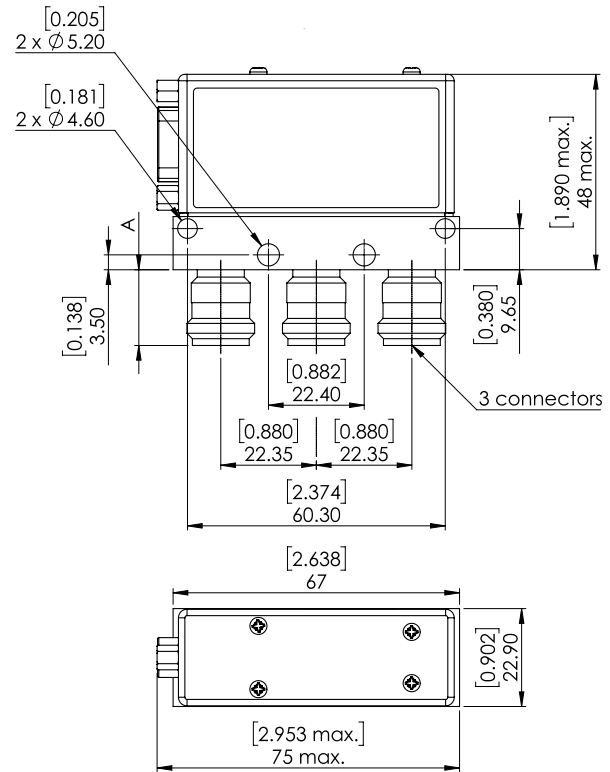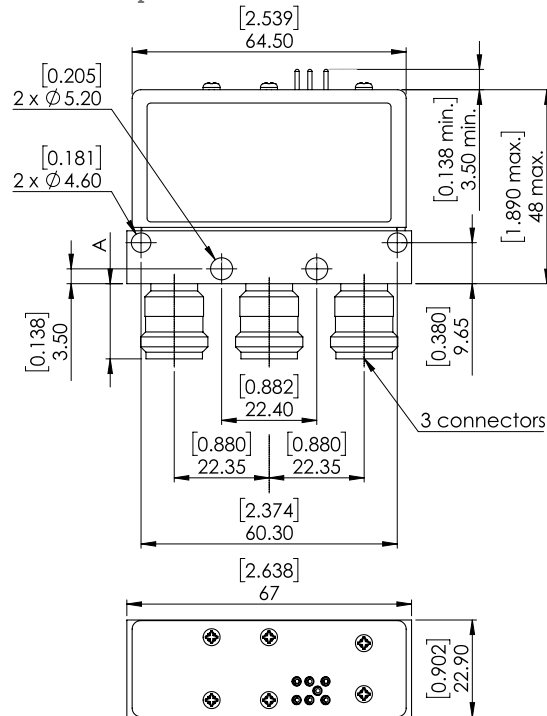With D-sub connector



Connectors	N	TNC	BNC
A max (mm [inches])	18.5 [0.709]	11.5 [0.433]	11.5 [0.433]

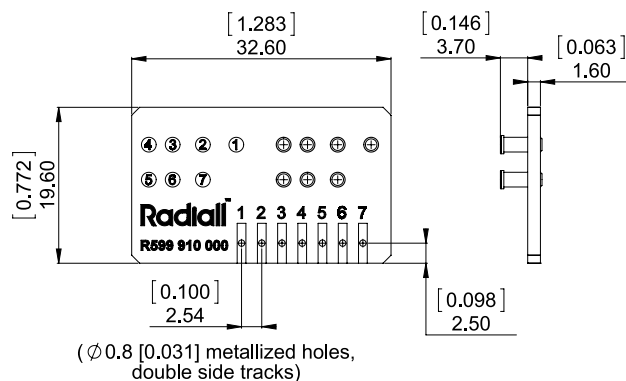A printed circuit board interface connector (ordered separately) has been designed for easy mounting on terminals.
For SPDT model R570 series = Radiall part number: **R599 910 000**









The PCB accessory pin number assignment is independant from the pin identification table of the switch.

Coaxial SPDT - Electrical Schematics

R570 Series

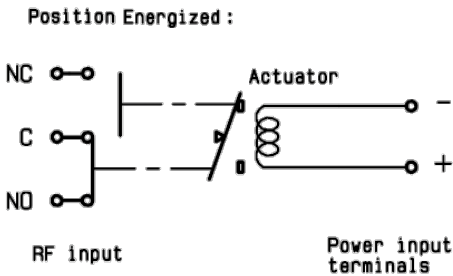
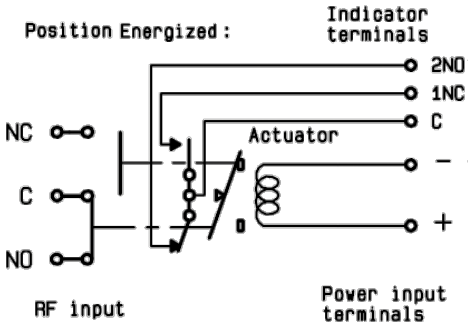
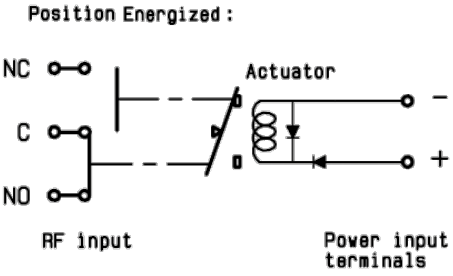
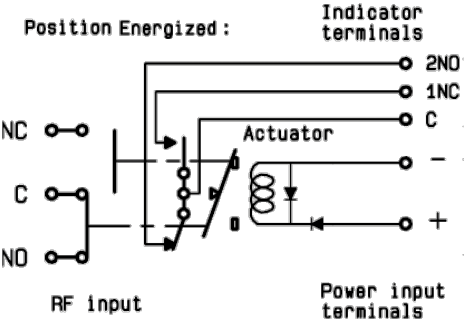
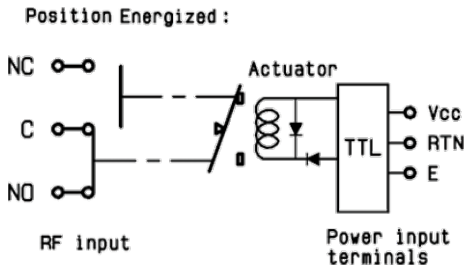
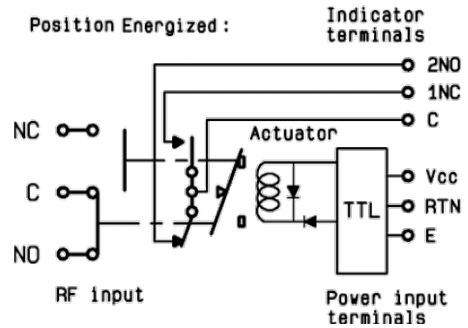
FAILSAFE

<p>WITHOUT OPTION R570 -1- 000</p> <p>Position Energized :</p>  <p>RF input</p> <p>Power input terminals</p>	<p>WITH INDICATOR CONTACT R570 -2- 000</p> <p>Position Energized :</p>  <p>Indicator terminals</p> <p>2NO</p> <p>1NC</p> <p>C</p> <p>RF input</p> <p>Power input terminals</p>
<p>WITH SUPPRESSION DIODES R570 -1- 030</p> <p>Position Energized :</p>  <p>RF input</p> <p>Power input terminals</p>	<p>WITH SUPPRESSION DIODES AND INDICATOR CONTACT R570 -2- 030</p> <p>Position Energized :</p>  <p>Indicator terminals</p> <p>2NO</p> <p>1NC</p> <p>C</p> <p>RF input</p> <p>Power input terminals</p>
<p>WITH TTL DRIVER (supression diodes are included) R570 -1- 100</p> <p>Position Energized :</p>  <p>RF input</p> <p>Power input terminals</p> <p>TTL</p> <p>Vcc</p> <p>RTN</p> <p>E</p>	<p>WITH TTL DRIVER AND INDICATOR CONTACT (supression diodes are included) R570 -2- 100</p> <p>Position Energized :</p>  <p>Indicator terminals</p> <p>2NO</p> <p>1NC</p> <p>C</p> <p>RF input</p> <p>Power input terminals</p> <p>TTL</p> <p>Vcc</p> <p>RTN</p> <p>E</p>

Coaxial SPDT - Electrical Schematics

R570 Series

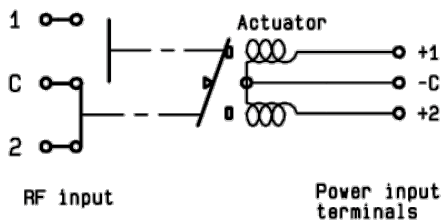
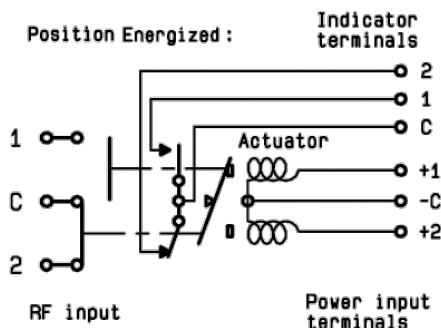
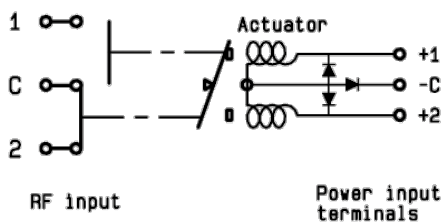
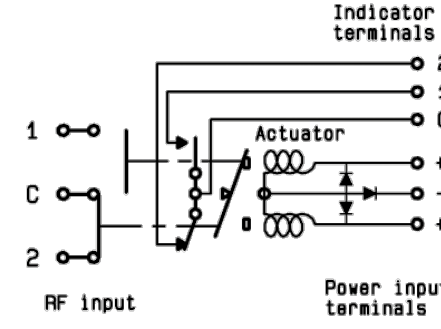
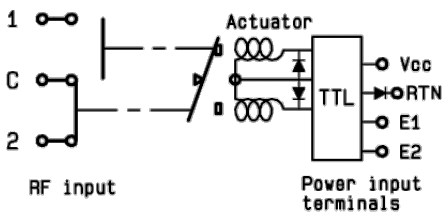
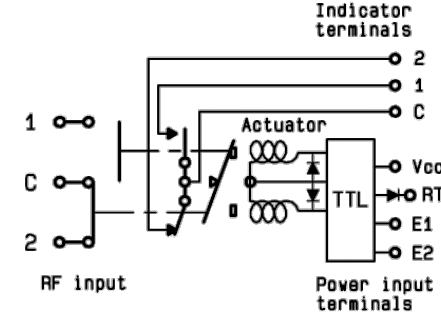
LATCHING

<p>WITHOUT OPTION R570-3- 000</p>  <p>RF input</p> <p>Power input terminals</p>	<p>WITH INDICATOR CONTACT R570 -4- 000</p> <p>Position Energized :</p>  <p>Indicator terminals</p> <p>RF input</p> <p>Power input terminals</p>
<p>WITH SUPPRESSION DIODES R570 -3- 030</p>  <p>RF input</p> <p>Power input terminals</p>	<p>WITH SUPPRESSION DIODES AND INDICATOR CONTACT R570 -4- 030</p>  <p>Indicator terminals</p> <p>RF input</p> <p>Power input terminals</p>
<p>WITH TTL DRIVER (supression diodes are included) R570 -3- 100</p>  <p>RF input</p> <p>Power input terminals</p>	<p>WITH TTL DRIVER AND INDICATOR CONTACT (supression diodes are included) R570 -4- 100</p>  <p>Indicator terminals</p> <p>RF input</p> <p>Power input terminals</p>

Coaxial SPDT - Electrical Schematics


R570 Series

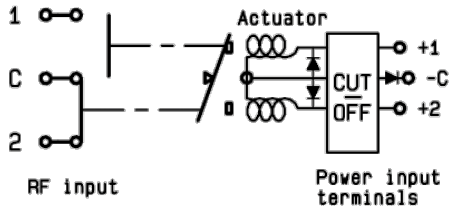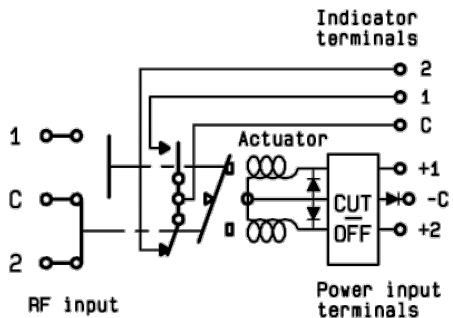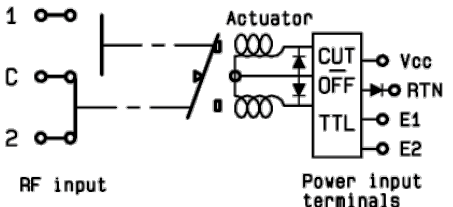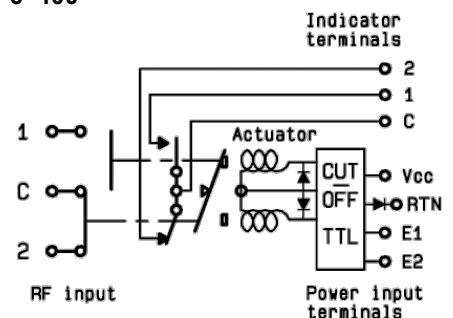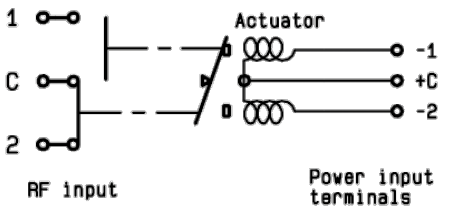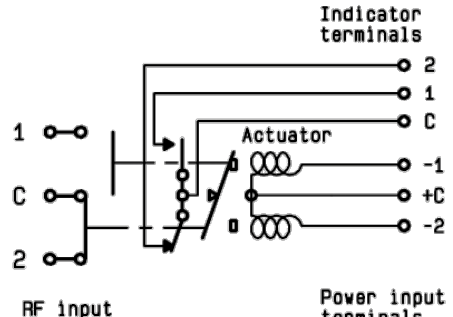LATCHING


<p>WITH CUT-OFF (supression diodes are included) R570 -5- 000</p> 	<p>WITH CUT-OFF AND INDICATOR CONTACT (supression diodes are included) R570 -6- 000</p> 
<p>WITH CUT-OFF AND TTL DRIVER (supression diodes are included) R570 -5- 100</p> 	<p>WITH CUT-OFF, TTL AND INDICATOR CONTACT (supression diodes are included) R570 -6- 100</p> 
<p>WITH POSTIVE COMMON, NO OPTION R570 -3- 010</p> 	<p>WITH POSTIVE COMMON AND INDICATOR CONTACT R570 -4- 010</p> 

Coaxial SPDT - Electrical Schematics

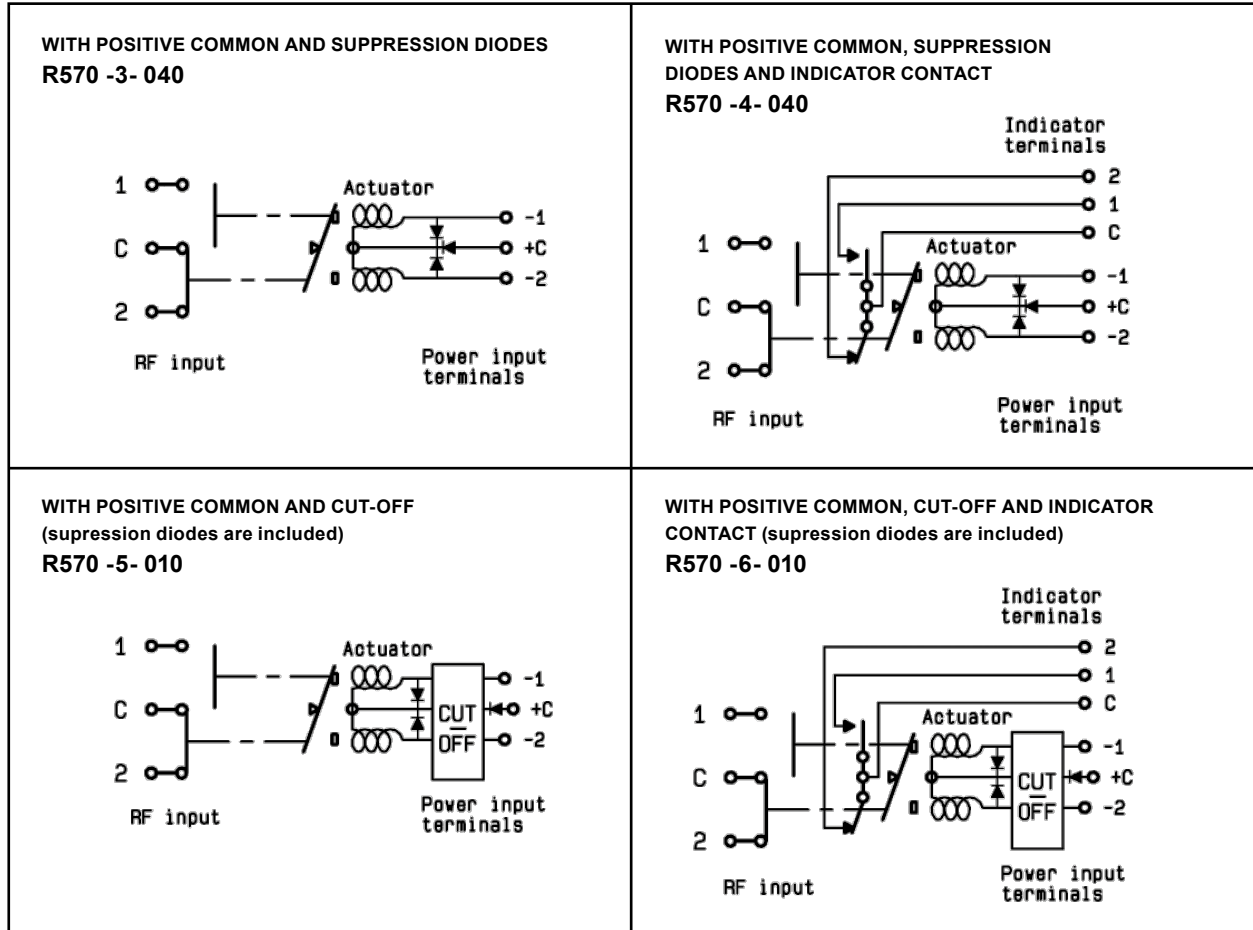R570 Series

LATCHING**PIN IDENTIFICATION**

Type	PIN						
	1	2	3	4	6	7	8
Failsafe	+	-	-	-	-	-	-
Failsafe + I.C.	+	-	-	-	2NO	1NC	C
Failsafe + TTL	E	-	RTN	VCC	-	-	-
Failsafe + I.C. + TTL	E	-	RTN	VCC	2NO	1NC	C
Latching	-2	-1	+C	-	-	-	-
Latching + Cut-off	or +2	or +1	or -C	-	-	-	-
Latching + I.C.	-2	-1	+C	-	2	1	C
Latching + I.C. + Cut-off	or +2	or +1	or -C	-	2	1	C
Latching + TTL	E2	E1	RTN	VCC	-	-	-
Latching + TTL + Cut-off	E2	E1	RTN	VCC	-	-	-
Latching + TTL + I.C.	E2	E1	RTN	VCC	2	1	C
Latching + TTL + I.C. + Cut-off	E2	E1	RTN	VCC	2	1	C

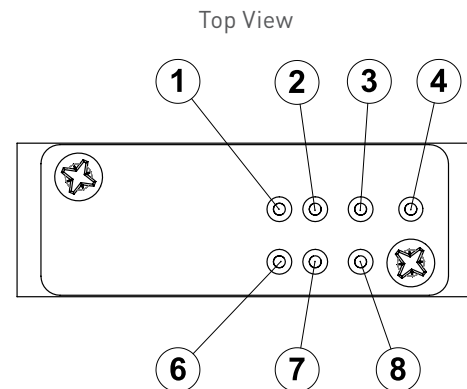

High performance SPDT up to 40 GHz

SMA - SMA 2.9



Radiall's PLATINUM series switches are optimised to perform at a high level over an extended life cycle, with outstanding RF performance, and a guaranteed insertion loss repeatability of 0.03 dB over a life span of 10 million switching cycles. PLATINUM series switches are perfect for automated test and measurement equipment, as well as signal monitoring devices.

Example of P/N:

R595443125 is a SPDT SMA 20 GHz, latching, 24 Vdc, with TTL driver, Indicators, D-Sub connector.

PART NUMBER SELECTION**R 595****Frequency Range:**

- 3: SMA up to 6 GHz
- 4: SMA up to 20 GHz
- F: SMA up to 26.5 GHz
- 8: SMA 2.9 up to 40 GHz

Type:

- 3: Latching ⁽¹⁾
- 4: Latching + I.C. ⁽¹⁾
- 5: Latching + S.C.O. ⁽¹⁾
- 6: Latching + S.C.O. + I.C. ⁽¹⁾

Actuator Voltage:

- 3: 24 Vdc
- 7: 15 Vdc

NOTE:

I.C.: Indicator contact - S.C.O.: Self Cut-Off
 (1): Suppression diodes are already included

Documentation:

- : Certificate of conformity
- C: Calibration certificate
- R: Calibration certificate + RF curves

Actuator Terminals:

- 0: Solder pins
- 5: D-Sub connector

Options:

- 1: Without option (positive common)
- 2: Compatible TTL driver

Switch Model:

- 1: Non-terminated SPDT switch

High performance SPDT up to 40 GHz

SMA - SMA 2.9

GENERAL SPECIFICATIONS

Operating mode		Latching	
Nominal operating voltage (across temperature range)	Vdc	24 (24 to 30)	15 (12 to 20)
Coil resistance at 23°C (+/-10%)	Ω	350	120
Operating current at 23°C	mA	68	125
TTL input	High level	3 to 7 Volts: 800 µA max 7 Volts	
	Low level	0 to 0.8 Volts: 20 µA max 0.8 Volts	
Switching time	ms	15	
Life (Min)	SMA	10 million cycles	
	SMA 2.9	5 million cycles	
Actuator terminals		D-Sub 9 pin female Solder pins	
Weight	g	60	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	-25°C to + 75°C
Storage temperature range	-55°C to +85°C
Temperature cycling (MIL STD 202F, Method 107D, Cond.A)	-55°C to +85°C (10 cycles)
Sine vibration operating (MIL STD 202, Method 204D, Cond.D)	10 - 2000 Hz, 20 g
Random vibration operating	16.91 g (rms) 50-2000 Hz 3min/axis
Shock operating (MIL STD 202, Method 213B, Cond.G)	50 g / 11 ms, sawtooth
Humidity operating	15 to 95% relative humidity
Humidity storage (MIL STD 202, Method 106E, Cond.E)	65°C, 95% RH, 10 days
Altitude operating	15.000 feet (4.600 meters)
Altitude storage (MIL STD 202, Method 105C, Cond.B)	50.000 feet (15.240 meters)

High performance SPDT up to 40 GHz


SMA - SMA 2.9

RF PERFORMANCE


Part Number		R5953--1--	R5954--1--		R595F--1--		R5958--1--	
Frequency range	GHz	DC to 6	DC to 20		DC to 26.5		DC to 40	
Impedance	Ω	50						
Insertion Loss (Max)	dB	0.20 + (0.45 / 26.5) x frequency [GHz]						
Isolation (Min)	dB	85	DC to 6 GHz	85	DC to 6 GHz	85	DC to 6 GHz	85
			6 to 12.4 GHz	75	6 to 12.4 GHz	75	6 to 12.4 GHz	75
			12.4 to 20 GHz	65	12.4 to 20 GHz	65	12.4 to 20 GHz	65
					20 to 26.5 GHz	60	20 to 26.5 GHz	60
						26.5 to 40 GHz	55	
V.S.W.R (Max)		1.15	DC to 6 GHz	1.15	DC to 6 GHz	1.15	DC to 6 GHz	1.15
			6 to 12.4 GHz	1.25	6 to 12.4 GHz	1.25	6 to 12.4 GHz	1.25
			12.4 to 20 GHz	1.30	12.4 to 20 GHz	1.30	12.4 to 20 GHz	1.30
					20 to 26.5 GHz	1.60	20 to 26.5 GHz	1.60
						26.5 to 40 GHz	1.80	
Repeatability (up to 10 million cycles at 25°C)	dB	0.03 dB maximum					0.05 dB maximum	

TYPICAL RF PERFORMANCE

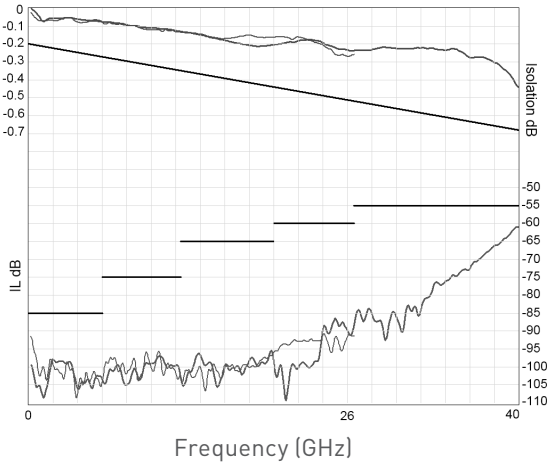Insertion Loss and Isolation



V.S.W.R.

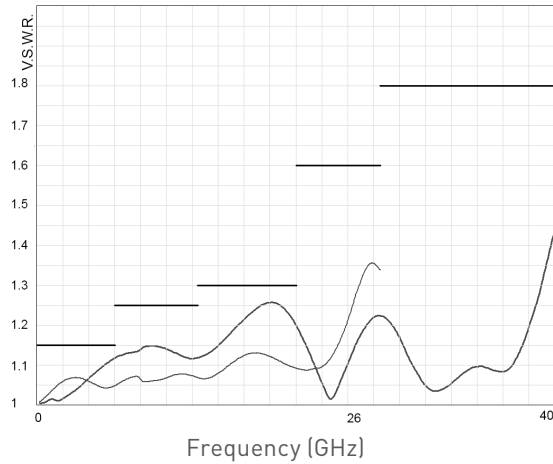

SMA — SMA 2.9 —

High performance SPDT up to 40 GHz


SMA - SMA 2.9

SWITCH MODEL: NON-TERMINATED SPDT SWITCH


The non-terminated SPDT switch is a single pole double throw switch. This switch is considered "break-before-make."

RF SCHEMATIC DIAGRAM


Position E1




Position E2

**POSITION INDICATOR**


State 11




State 22

**Standard drive option "1"****(Positive common):**

- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and close RF path 2-3)




D-Sub connector




Solder pins

TTL drive option "2"

- Connect pin GND to ground
- Connect pin +Vcc to supply (+20 Vdc to +32 Vdc)
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open)
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path (Ex: apply TTL "High" to pin E2)



D-Sub connector




Solder pins

High performance SPDT up to 40 GHz


SMA - SMA 2.9

TYPICAL OUTLINE DRAWING

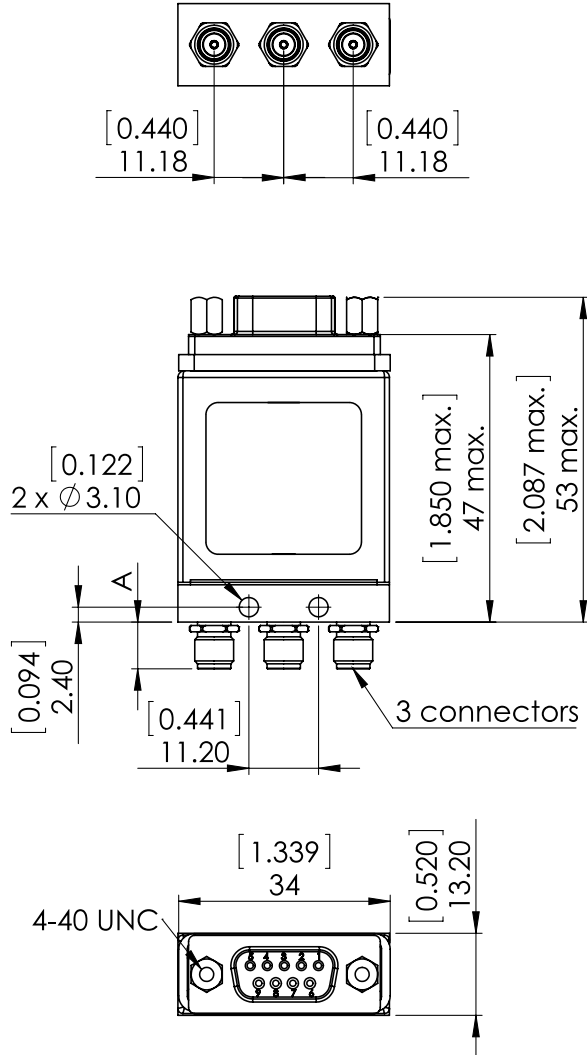With D-Sub connector



With solder pins

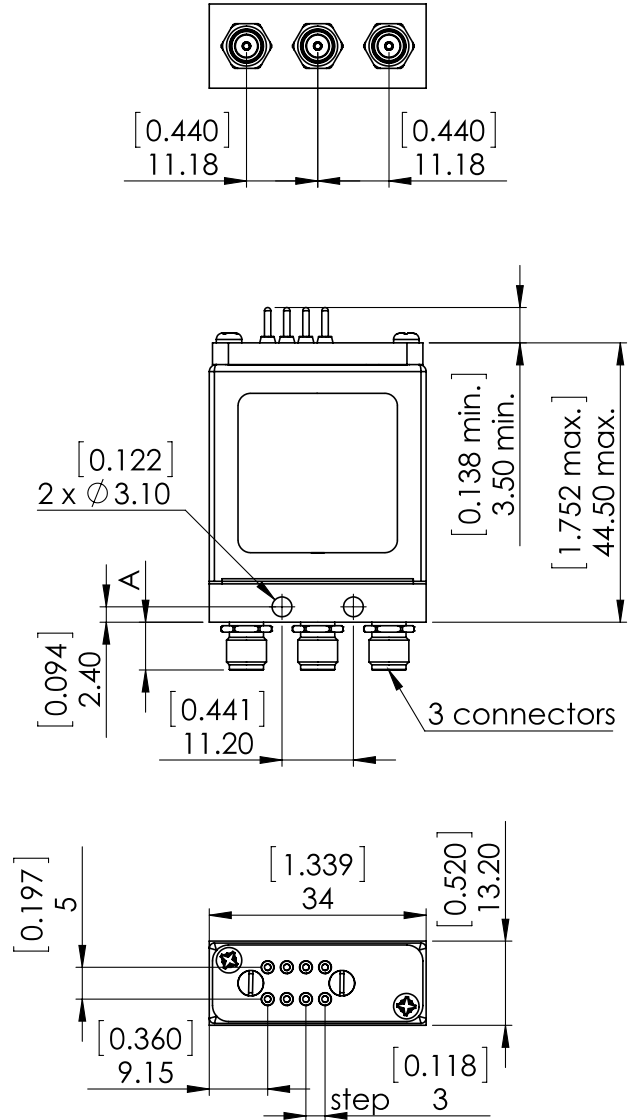

All dimensions are in millimeters [inches].

Connectors	A max mm [inches]
SMA	7.7 [0.303]
SMA 2.9	6.7 [0.264]

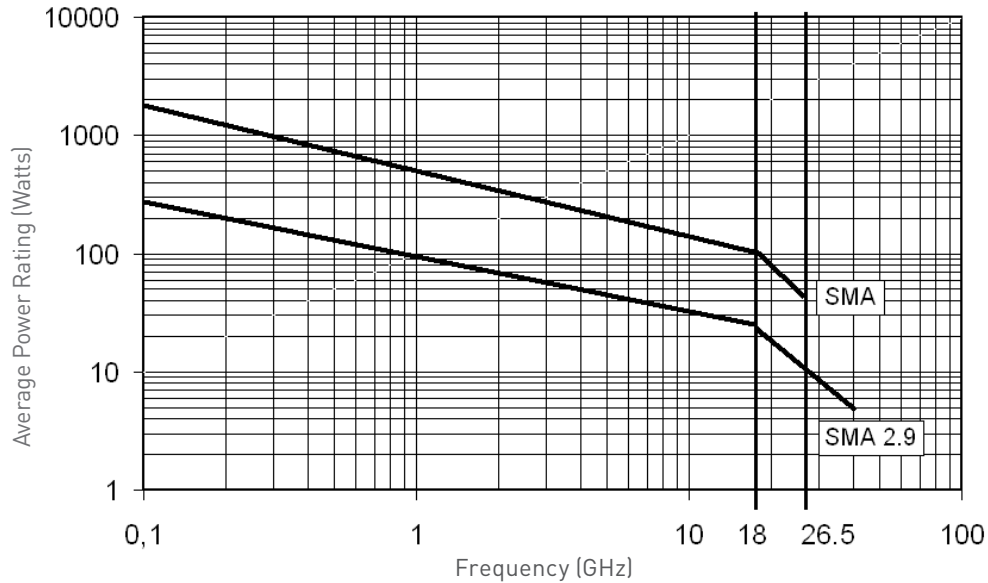
High performance SPDT up to 40 GHz

SMA - SMA 2.9


RF POWER RATING CHART

This graph is based on the following conditions:

- Ambient temperature: + 25°C
- Sea level
- V.S.W.R.: 1 and cold switching

**DERATING FACTOR VERSUS VSWR**

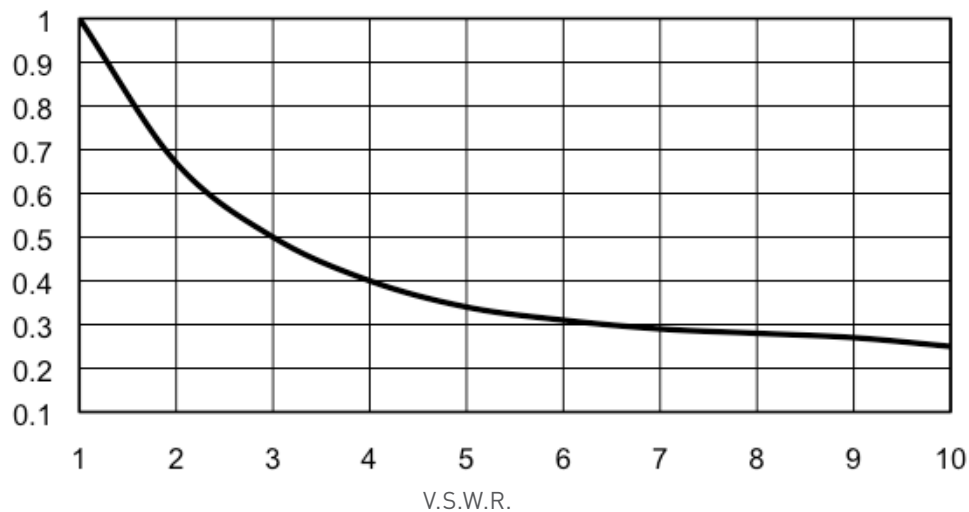The average power input must be reduced for load V.S.W.R. above 1:1



Optional Features for SPDT

GENERAL



All miniature SPDT switches fitted with SMA, QMA, 2.4 mm or SMA 2.9 connectors can be delivered with 34 mm narrow width RF body. Contact Radiall sales directly for availability.

Examples of dedicated application options:




SMA SPDT with a SINGLE input TTL driver. This option is available in a latching configuration upon special request. Key advantages include less wires and easier connection.



SPDT with MILC38999 circular connector for L band airborne applications.



SPDT models available for high power military applications (up to 100 watts CW from DC to 18 GHz).



A SP4T design up to 26.5 GHz with SMT relays mounted on a PCB fitted with UMP (Ultra Miniature Pressure) contact. Various switching configurations can be designed according to your specific requests.



SPDT with D-sub connector can be designed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radial:

R573403005	R574483810	R574J52425	R574J93625	R574F82825	R595443125	R573092425	R570033040
R574F93305	R573F03810	R574422000	R573F83625	R573432445	R574432445	R574F83825	R595333120
R573803415	R570842030	R574333410	R570853100	R573432645	R574313340	R574482405	R573333400
R574332530	R573F03410	R573453405	R574823625	R573312840	R573103625LP	R595367225	R595853225
R574422300	R573302830	R573F02600	R573F02825	R574F03040	R573F03600	R574853625	R570523105
R574F03825	R574F92620	R573F02225	R574F03000	R574333310	R573F03605	R591303445	R594F73417C
R574193625	R573483685LP	R573402835	R573483810	R574033525	R573003310	R573312345	R574332535
R573J13420	R574823325	R574193425	R573F83005	R574332335	R574823600	R595443110	R573402315
R573J23405	R573812430	R573F22625	R594F73617C	R573053320	R574803605	R573423815	R591722635
R573113380	R574482805	R574J92425	R574J53625	R573023600	R574313520	R574J02610	R574J03420
R573F02625	R574853325	R570A12030	R574332525	R574823620	R573J02410	R573422445	R595F43115C