

STRAIGHT PLUG FULL CRIMP TYPE


CABLE 5/50 D

R164.076.000

Series : QN

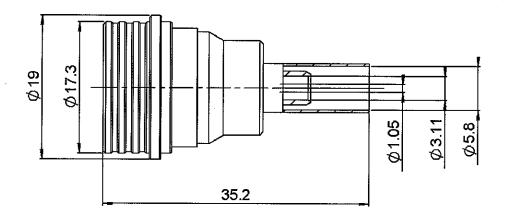



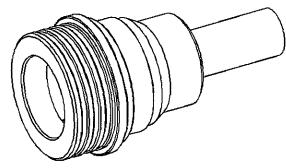



All dimensions are in mm.

COMPONENTS	MATERIALS	PLATINGS (μm)
BODY CENTER CONTACT OUTER CONTACT INSULATOR GASKET	BRASS BRASS BERYLLIUM COPPER PTFE EPDM	BBR 0.5 OVER SILVER 3 SILVER 5 PASSIVATED OVER COPPER 0.5 GOLD 0.3 OVER CHEMICAL NICKEL
OTHERS PARTS - -	BRASS	BBR 2 - -

Issue: 0519 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



STRAIGHT PLUG FULL CRIMP TYPE

CABLE 5/50 D

R164.076.000

Series: QN

PACKAGING

Standard	Unit	Other
50	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

1.05 +

- (

Impedance

50 Ω

Frequency

0-6* GHz

VSWR

0-0" GHZ

Insertion loss

0.025 x F(GHz) Maxi **0.048** √F(GHz) dB Maxi

RF leakage

** - F(GHz) dB Maxi

Voltage rating

850 Veff Maxi

Dielectric withstanding voltage Insulation resistance

1500 Veff mini

5000 $M\Omega$ mini

MECHANICAL CHARACTERISTICS

Center contact retention

Axial force – Mating end

27 N mini

Axial force – Opposite end Torque

27 N mini NA N.cm mini

Recommended torque

Mating Panel nut

NA N.cm

Panel nut Clamp nut NA N.cm NA N.cm

A/F clamp nut

0.000 mm

Mating life

100 Cycles mini

Weight

18.291 g

ENVIRONMENTAL

Operating temperature

-55/+125 ° C

Hermetic seal

NA Atm.cm3/s

Panel leakage

NA

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	С	d	e	f
mm	4.00	7.00	12.9	0.00	8.90	0.00

Assembly instruction:

Crimp 02

Recommended cable(s)

KX 23

RG 142 FTX

RG 142

RG 400

RG 223

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off

200 N mini

- torque

NA N.cm

TOOLING

Part Number	Description	Hexagon	
	•	•	
R282.223.000	CRIMPING	1.73-5.41	
	TOOL		
R282.235.011	CRIMPING DIES	1.73-5.41	
R282.293.000	CRIMPING		
	TOOL		

OTHERS CHARACTERISTICS

* Usable 0-11GHz

** Connector only : -90dB DC<F<3GHz

-80dB 3<F<6GHz

Issue: 0519 D

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Radiall:

R164076000