





(0.635 mm) .025" PITCH • QMSS/QFSS SERIES

QMSS Board Mates: QFSS


QFSS Board Mates: OMSS

QMSS/QFSS Standoffs:

SO

SPECIFICATIONS

Insulator Material: Liquid Crystal Polymer Terminal, Ground Plane & Shield Material: Phosphor Bronze Phosphor Bronze
Plating:
Au over 50 µ" (1.27 µm) Ni
(Tin on Ground Plane Tail)
Operating Temp Range:
-55 °C to +125 °C
Current Rating: Contact: 3.4 per pin (4 adjacent pins powered)
Ground Plane: Ground Plane: 7.8 A per ground plane (2 ground planes powered) Voltage Rating: 300 VAC/424 VDC

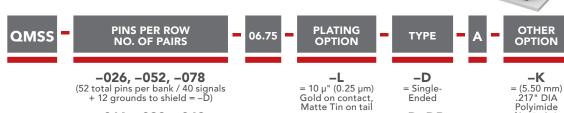

-016, -032, -048 (16 pairs per bank = -D-DP)


STATISTICAL STATES OF THE STAT

-D-DP = Differential Pair


(2.54) .100

film Pick & Place Pad (N/A with -PC4)

-PC4 = 4 Power Pins/End (N/A with -A)




No. of Banks x (21.34) .840 - (0.51) .020



OPTION Tape & Reel . Options (-TR & -FR) available. Visit


PACKAGING

series web page and view engineering prints for complete specifications.



-PC4 OPTION


View complete specifications at: samtec.com?QMSS

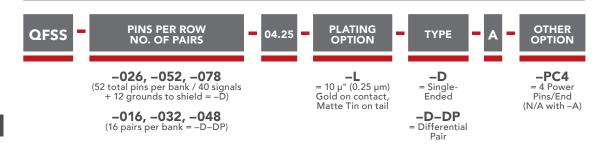




PROCESSING

For applications requiring more than two connectors contact ipg@samtec.com



Note: Some lengths, styles and options are non-standard, non-returnable.

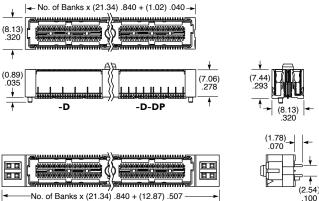

PACKAGING OPTION

.100

Tape & Reel Options (-TR & -FR) available. Visit series web page and view engineering prints for complete specifications.

View complete specifications at: samtec.com?QFSS

-PC4 OPTION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

QFSS-078-04.25-H-D-A-P