

ONE PLACE DECIMALS  $\pm .1[2.5]$  THREE PLACE DECIMALS  $\pm .005[.127]$  ANGLES  $\pm 2^\circ$   
 TWO PLACE DECIMALS  $\pm .01[.25]$  FOUR PLACE DECIMALS  $\pm .0020[.051]$

TITLE:  
**2MM SOCKET  
 STRIP ASSEMBLY**

DWG NO:  
**YTQ-1XX-XX-XX-X-XXX-XXX**

SHEET 1 OF 2

## NOTES:

1. MINIMUM CONTACT RETENTION: .5 lb PER PIN.
2. CUT FLASH TO BE .020 [.50] MAX.
3. TOE TO BE 2' MAX.
4. HEIGHT VARIANCE, PIN TO PIN: .005 [.13] MAX.
5.  $\textcircled{C}$  REPRESENTS A CRITICAL DIMENSION.



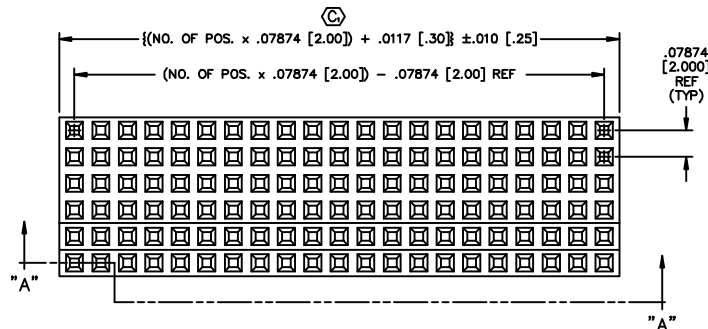


FIG. 1

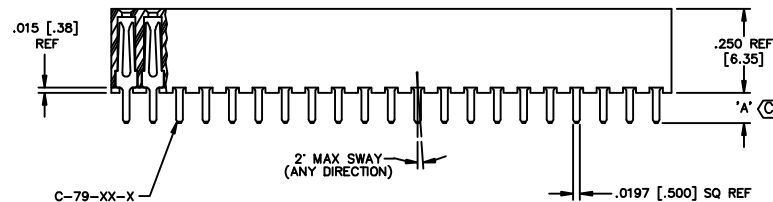

SECT. "A-A"

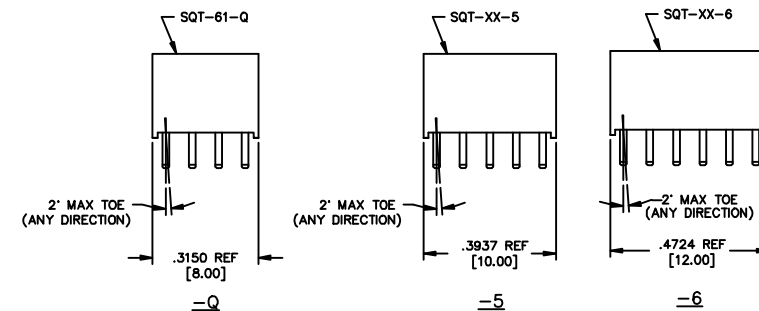

\* = NOT ENGINEERING APPROVED

**\*\* - MW OPTION, DO NOT DESIGN IN. SAMTEC WILL  
 ONLY SUPPORT EXISTING BUSINESS 2/11/02.**

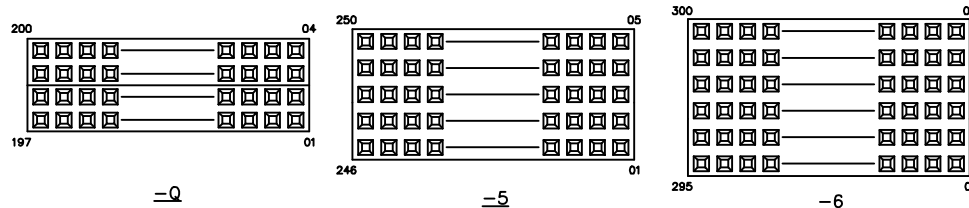


FIG. 2  
 POLARIZATION OPTION LOCATION  
 INSERT PK-07-N INTO SPECIFIED  
 POSITION AND BREAK OFF TAB

TABLE 1		
LEAD STYLE	'A'	CONTACT
-01	.090 [2.29]	C-79-01-X
-02	.600 [15.24]	C-79-02-X
-03	.208 [5.28]	C-79-53-X

**PROPRIETARY NOTE**  
 THIS DOCUMENT CONTAINS INFORMATION  
 CONFIDENTIAL AND PROPRIETARY TO  
 SAMTEC INC. AND SHALL NOT BE  
 REPRODUCED OR TRANSMITTED IN  
 ANY FORM OR BY ANY MEANS  
 WITHOUT THE WRITTEN CONSENT OF SAMTEC INC.

CONTACT:  
 PHOS BRONZE

MATERIAL:  
 BLACK, LCP

**samtec**

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150  
 PHONE (812) 944-6733 P.O. BOX 1147  
 CODE 55322

MADE BY:  
 BRATCHER 1-26-99

YTQ-1XX-XX-XX-X-XXX-XXX  
 SHEET 1 OF 2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[YTQ-150-03-S-5](#)