

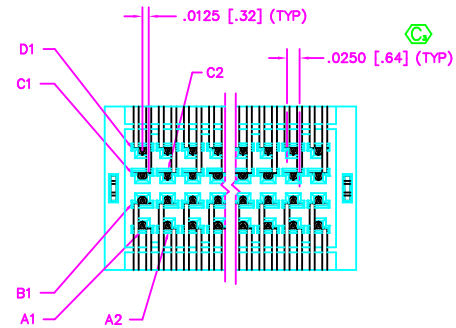
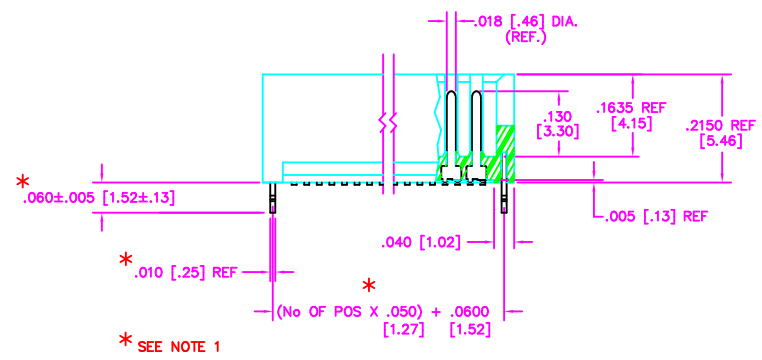


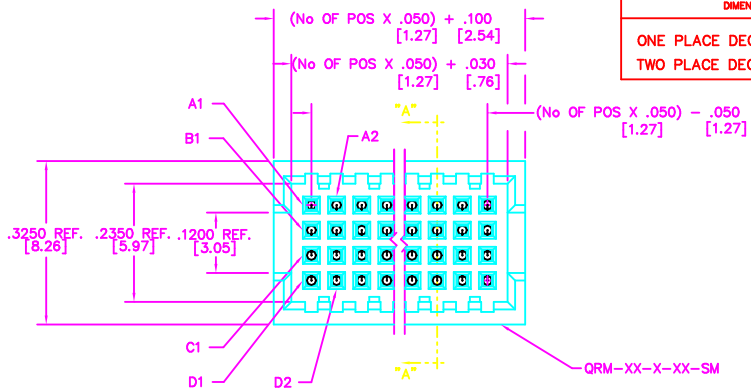


"A" = $\frac{(\text{NO. OF POS. X } .050 [1.27]) + .100 [2.54]}{2} - .135$

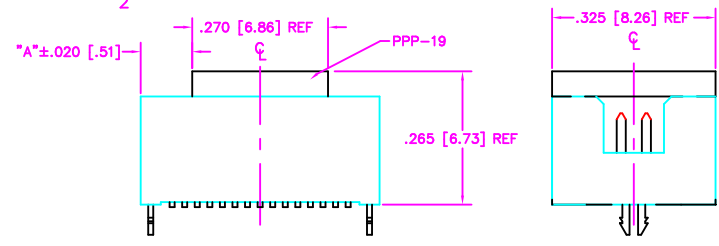

-P: PICK AND PLACE PAD

DIMENSIONS ARE IN INCHES		UNLESS OTHERWISE NOTED		TOLERANCES ARE:
ONE PLACE DECIMALS ± .1	THREE PLACE DECIMALS ± .005	ANGLES ± 5°		
TWO PLACE DECIMALS ± .01	FOUR PLACE DECIMALS ± .0020			



- MOLC-1XX-XX-XXX-X-XX-X
- No OF POSITIONS
-05 THRU -50
- LEAD STYLE
-02: SURFACE MOUNT
- PLATING SPECIFICATIONS
- S: SELECTIVE GOLD, TIN ON THE TAIL (USE T-1MXX-01-S)
 - H: HEAVY GOLD ON POSTS, FLASH GOLD ON TAIL (USE T-1MXX-01-H)
 - STL: SELECTIVE GOLD, TIN/LEAD ON THE TAIL (USE T-1MXX-01-STL)
 - SM: GOLD SELECTIVE, MATTE TIN TAIL (USE T-1MXX-01-S)
 - L: LIGHT SELECTIVE GOLD, MATTE TIN TAIL (USE T-1MXX-01-L)
- OPTION
- P: PICK AND PLACE PAD (USE PPP-19)
 - TR: TAPE & REEL
- OPTION
- LC: LOCKING CLIP (USE LC-09-TM)
- BODY SPECIFICATION
- Q: 4 ROW (USE QRM-XX-Q-01-SM)

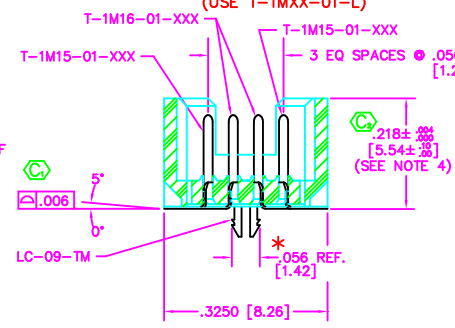

SECT: "A-A"

- NOTES:
1. DIMENSIONS PERTAIN TO -LC OPTION ONLY.
 2. INSULATOR MATERIAL: VECTRA E130
 3. TERMINAL MATERIAL: ".0045" BeCu 1/2 HARD 172, HEAT TREATED.
 4. DIMENSION TO BE MEASURED AT BEND OF THE LEAD, AND LEADS MUST REST ON PLASTIC RIBS.
 5. Ⓢ REPRESENTS CRITICAL DIMENSION FOR

TABLE 1		
OPTION	TUBE	PLUG
BLANK, -LC	PT-1-24-04-38	TP-03
-P	PT-1-24-03-38	TP-03

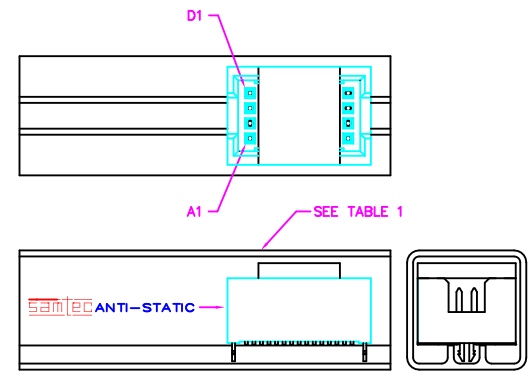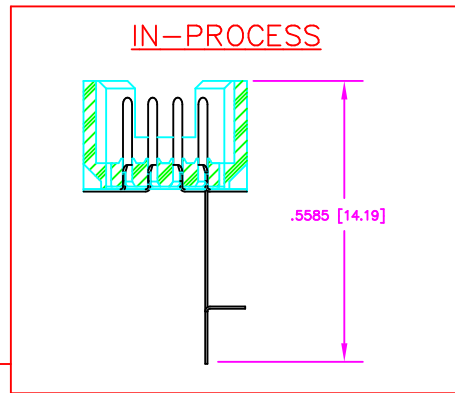

PACKAGE PARTS IN TUBE AS SHOWN

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:
INSULATOR:
LIQUID CRYSTAL POLYMER
CONTACT:
PHOSPHOR BRONZE



520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

[MOLC-105-02-H-Q](#) [MOLC-105-02-L-Q](#)