







HDMR SERIES

HIGH SPEED I/O RECEPTACLES

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?HDMR

Insulator Material:

High Temperature

Thermoplastic Contact Material:

Copper Alloy

Shell Material: Steel

Operating Temp Range:

-25°C to +85°C Plating:

Gold on Contacts, Nickel on

Shell and Tin on Tails Current Rating:

1.2 A per contact Voltage Rating: 40 VAC


Contact Resistance:

 $30 \text{ m}\Omega$ Minimum Cycles:


Lead-Free Solderable:

RoHS Compliant:

Mates with: **HPDPI**

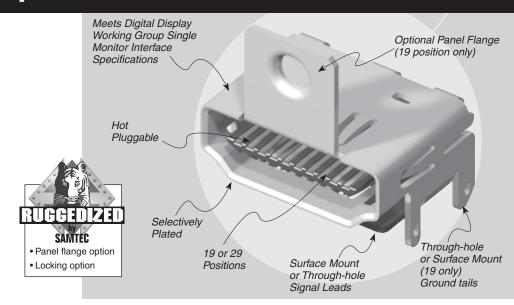

ALSO **AVAILABLE**



HDMP is an Edge Mount plug that mates to HDMR receptacles. Call Samtec for HDMP Series specifications.

NO. OF **HDMR POSITIONS**

LEAD STYLE

PLATING

TAIL OPTION

OPTIONS

-19 = 19 Positions / Mates with **HPXXX 5 Pairs**

-29

= 29 Positions / Mates with

.181

-19-01-PF

(5.96)

-01 Through-hole Ground Tails

-02 = Surface Mount **Ground Tails**

–F = Gold Flash on Mating Area, Tin on Tails

-S

-SM **Surface Mount**

(Signal Leads)

= Through-hole (Only available on HDMR-19-01-X-TH-PF-L)


(4,60) .181

-19-02-PF



-PF = Panel Flange

= Locking Option (Only available on HDMR-19-01-X-TH-PF-L)

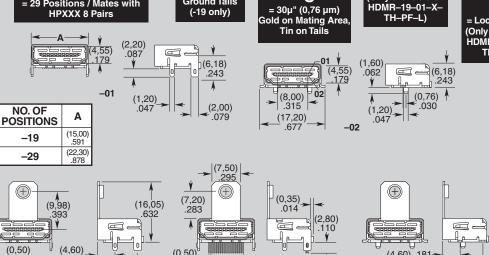

Note: Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

(0.50)

.020

(9,00).354

-19-01-PF-L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

HDMR-19-01-F-SM-PF HDMR-29-01-F-SM-PF HDMR-19-01-F-TH-PF-L