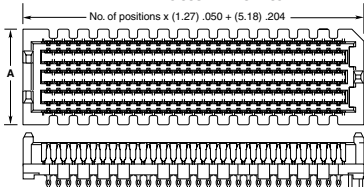



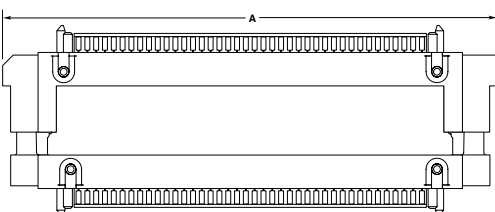






(1.27 mm) .050" PITCH • PRESS-FIT & 85 Ω OPEN-PIN-FIELD ARRAYS

SERIES	POSITIONS PER ROW	LEAD STYLE	PLATING OPTION	NO. OF ROWS	OPTION	PACKAGING										
SEAMP Terminal	-10, -20, -30, -40, -50	-02.0 (SEAMP only)	-L = 10 μ" (0.25 μm) Gold on contact area, Matte Tin on tail	-04, -06, -08, -10	-GP Guide Post (SEAMP only)	-TR = Tape & Reel										
SEAFP Socket		-05.0 (SEAFP only)	-S = 30 μ" (0.76 μm) Gold on contact area, Matte Tin on tail	SEAFP: -04 & -06 Rows only		-FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks)										
SEAMP Board Mates: SEAF, SEAF-RA-GP, SEAFP				<table><tr><th>NO. OF ROWS</th><th>A</th></tr><tr><td>-04</td><td>(7.06) .278</td></tr><tr><td>-06</td><td>(9.60) .378</td></tr><tr><td>-08</td><td>(12.14) .478</td></tr><tr><td>-10</td><td>(14.68) .578</td></tr></table> 			NO. OF ROWS	A	-04	(7.06) .278	-06	(9.60) .378	-08	(12.14) .478	-10	(14.68) .578
NO. OF ROWS	A															
-04	(7.06) .278															
-06	(9.60) .378															
-08	(12.14) .478															
-10	(14.68) .578															

SEAFP Board Mates: SEAM, SEAM-RA, SEAMP				NO. OF ROWS	A
				-04	(5.61) .221
				-06	(8.15) .321

View complete specifications at: samtec.com?SEAMP & samtec.com?SEAFP. Visit samtec.com?SEAFP-RA for right-angle socket.

SERIES	POSITIONS PER ROW	LEAD STYLE	NO. OF ROWS	085														
SEAR 85 Ω Tuned Riser	-40, -50	-10.0 = 20 mm Mated Height -20.0 = 30 mm Mated Height -30.0 = 40 mm Mated Height	-06, -08, -10															
SEAR Board Mates: SEAF				<table><tr><th>POSITIONS PER ROW</th><th>A</th></tr><tr><td>-40</td><td>(71.42) 2.812</td></tr><tr><td>-50</td><td>(84.12) 3.312</td></tr></table> <table><tr><th>NO. OF ROWS</th><th>B</th></tr><tr><td>-06</td><td>(11.43) .450</td></tr><tr><td>-08</td><td>(13.97) .550</td></tr><tr><td>-10</td><td>(16.51) .650</td></tr></table>	POSITIONS PER ROW	A	-40	(71.42) 2.812	-50	(84.12) 3.312	NO. OF ROWS	B	-06	(11.43) .450	-08	(13.97) .550	-10	(16.51) .650
POSITIONS PER ROW	A																	
-40	(71.42) 2.812																	
-50	(84.12) 3.312																	
NO. OF ROWS	B																	
-06	(11.43) .450																	
-08	(13.97) .550																	
-10	(16.51) .650																	

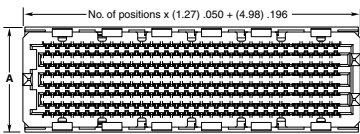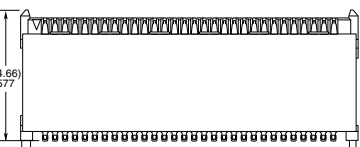SERIES	POSITIONS PER ROW	11.0	PLATING OPTION	NO. OF ROWS	SOLDER TYPE	A	K	"X"R						
SEAMI 85 Ω Tuned Terminal	-40 -50		-L = 10 μ" (0.25 μm) Gold on contact area, Matte Tin on solder tail -S = 30 μ" (0.76 μm) Gold on contact area, Matte Tin on solder tail	-08 -10	-1 = Tin/Lead Alloy SolderCharge -2 = Lead-Free Solder Charge			-TR = Tape & Reel -FR = Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks)						
SEAMI Board Mates: SEAF				<table><tr><th>NO. OF ROWS</th><th>A</th></tr><tr><td>-08</td><td>(13.41) .528</td></tr><tr><td>-10</td><td>(15.95) .628</td></tr></table>					NO. OF ROWS	A	-08	(13.41) .528	-10	(15.95) .628
NO. OF ROWS	A													
-08	(13.41) .528													
-10	(15.95) .628													

Note: Some lengths, styles and options are non-standard, non-returnable

View complete specifications at: samtec.com?SEAF & samtec.com?SEAMI

View complete specifications at: samtec.com?SEAR & samtec.com?SEAMI.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[SEAMI-40-11.0-L-10-2-A-K-TR](#) [SEAMI-20-11.0-L-04-2-A-K-TR](#) [SEAMI-40-11.0-L-08-2-A-K-TR](#) [SEAMI-50-11.0-L-10-2-A-K-TR](#) [SEAMI-50-11.0-S-08-2-A-K-TR](#) [SEAMI-50-11.0-S-10-2-A-K-TR](#) [SEAMI-20-11.0-L-06-2-A-K-TR](#) [SEAMI-20-11.0-L-08-2-A-K-TR](#) [SEAMI-30-11.0-L-04-2-A-K-TR](#) [SEAMI-50-11.0-L-08-2-A-K-TR](#) [SEAMI-30-11.0-S-08-2-A-K-TR](#) [SEAMI-40-11.0-S-08-2-A-K-TR](#) [SEAMI-40-11.0-S-10-2-A-K-TR](#)