



FEATURES & BENEFITS

 Pin compatible with optical FireFly™ using the same connector system

- Data connection is taken "off board" for easier routing
- Low-cost solution for seamless integration of new and existing designs
- Low-profile housing for space savings
- x4 bidirectional or x12 unidirectional
- Variety of end 2 termination options



x4 Bidirectional ECUE x12 Unidirectional ECUE

PAM4

56G b p s

x4 Bidirectional ECUE-2



Standard Copper (ECUE)

- 14 Gbps
- 100 Ω , 34 AWG or 36 AWG Eye Speed $^{\circ}$ twinax cable



Optimized Copper (ECUE-2)

- 28 Gbps card design
- 100 Ω, 34 AWG Eye Speed® ultra low skew twinax cable
- Optimized for use with connector UEC5-2




PCI Express®-Over-FireFly™ Copper (PCUE)

- PCle® 4.0
- 100 Ω , 34 AWG Eye Speed* ultra low skew twinax cable
- Optimized for use with connector UEC5-2




RUGGED MICRO FLYOVER® SOCKET SYSTEM

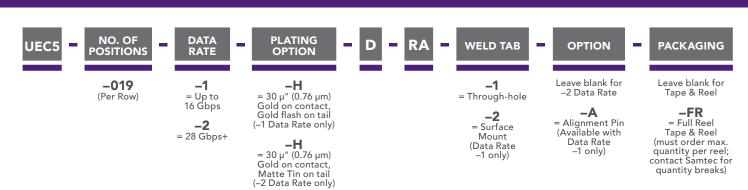



UEC5


Board Mates: ECUE, ECUO, PCUO, PCUE, ETUO

















Note: PCB footprints are not interchangeable for –1 and –2 data rate versions.

UEC5-019-2-X-D-RA-1

UEC5-019-1-X-D-RA-1-A

View complete specifications at: samtec.com?UEC5-1 & samtec.com?UEC5-2

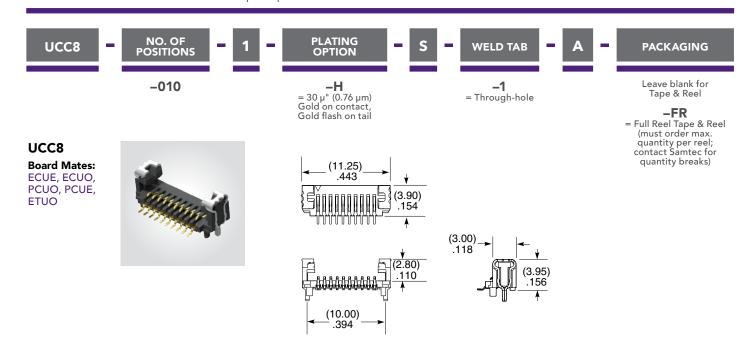

Note:

Some sizes, styles and options are non-standard, non-returnable.

View complete specifications at: samtec.com?UCC8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Samtec:

UEC5-019-2-H-D-RA-1