


SD

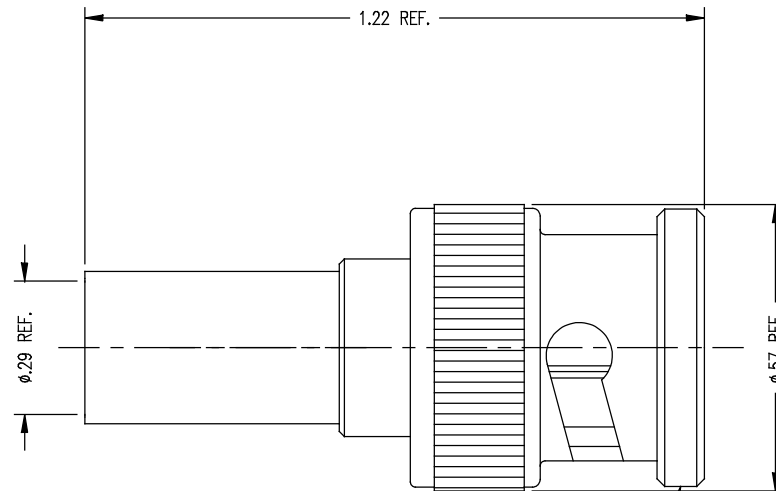

## NOTES:

1. FOR USE WITH BELDEN 1694A CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-661-4.
3. FOR CRIMPING USE DIE KTH-2270.
4. INTERFACE PER MIL-STD-348, FIG 301.1, AS APPLICABLE.
5. MATERIALS:
  - INSULATOR-TEFLON, ASTM-D-4894
  - GASKET-SILICONE RUBBER, ZZ-R-765
  - SPRING WASHER } BER. COP., ASTM-B-196
  - OUTER CONTACT }
  - K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
  - ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
  - CENTER CONTACTS-GOLD PLATE PER MIL-G-45204
  - SPRING WASHER-SILVER PLATE PER QQ-S-365
  - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
  - NOMINAL IMPEDANCE: 75 OHMS
  - WORKING VOLTAGE: 500 VRMS
  - FREQUENCY RANGE: DC TO 3 GHz
8. MARK PACKAGE: KINGS 2065-22-9

STAMP: KINGS 2065-22-9  
YR WK (DATE CODE)

SD

2065-22-9 SD

## REVISIONS

ISSUE	CHANGES
0	ER 38636 DCT 8/16/02
1	CN 38748 E DCT 1/16/3

SCALE 4:1

APPROX SURFACE AREA

WAS: E-20041

USED ON

REF:

PL, 75 BNC

DRAWN	DCT	DATE	6/17/2
DESIGN	DCT	DATE	6/17/2
APPR.		DATE	

**KINGS**ELECTRONICS CO., INC.  
ROCK HILL, SOUTH CAROLINA 29730

2065-22-9

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Winchester Interconnect:](#)

[2065-22-9](#)