


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

2065-28-9

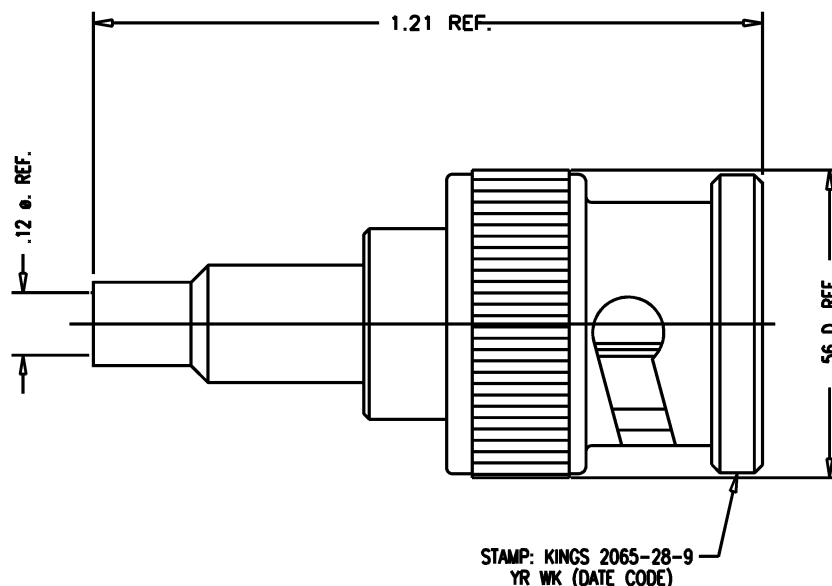

NOTES:

1. FOR USE WITH RG-179, 187/U AND BELDEN 9221 & 179DT CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-661-1.
3. FOR CRIMPING USE DIE KTH-2258.
4. INTERFACE PER KINGS ES-17, FIG 2..
5. MATERIALS:
 - INSULATOR-TEFLON, ASTM-D-4894
 - GASKET-SILICONE RUBBER, A-A-59588
 - SPRING WASHER } BER. COP., ASTM-B-196
 - OUTER CONTACT }
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
 - CENTER CONTACTS-GOLD PLATE PER ASTM-B488
 - SPRING WASHER-SILVER PLATE PER ASTM-B700
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 75 OHMS
 - VOLTAGE RATING: 500 VRMS
 - FREQUENCY RANGE: DC TO 3 GHz

REVISIONS

ISSUE	CHANGES
0	ER 39338 JPK 09/29/05
1	CN 39438 C JPK 04/13/06
2	CN 39449 C JPK 05/03/06

2065-28-9SD

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF: EOR 686

PLUG, 75 BNC

DRAWN	JLA	DATE	07/27/05
DESIGN	JLA	DATE	07/27/05
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2065-28-9

GSD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Winchester Interconnect:](#)

[2065-28-9](#)