


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

2065-29-9

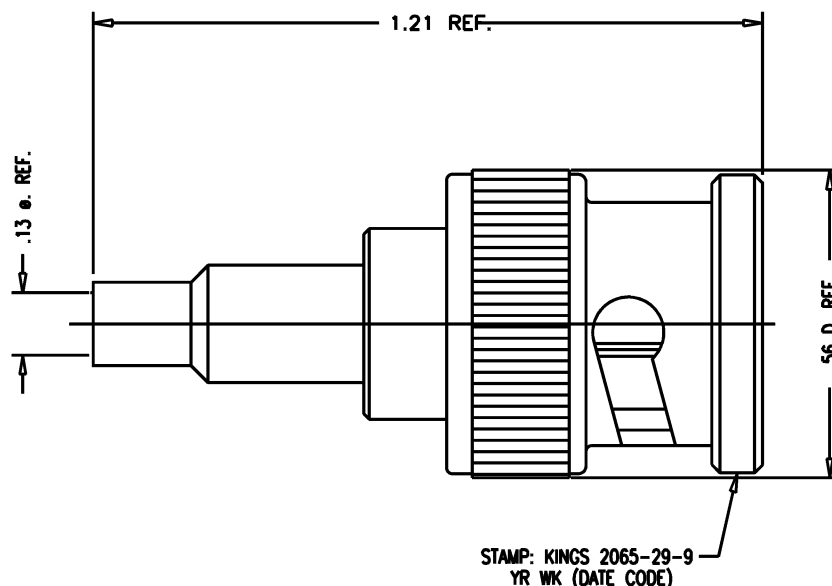

NOTES:

1. FOR USE WITH BELDEN 1279P & 1279R CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-764-1.
3. FOR CRIMPING USE DIE KTH-2276.
4. INTERFACE PER KINGS ES-17, FIG 2..
5. MATERIALS:
 - INSULATOR-TEFLON, ASTM-D-4894
 - GASKET-SILICONE RUBBER, A-A-59588
 - SPRING WASHER } BER. COP., ASTM-B-196
 - OUTER CONTACT }
 - K-GRIP SLEEVE-COMMERCIAL BRONZE, ASTM-B-135
 - ALL OTHER METAL PARTS-BRASS, ASTM-B16
6. FINISHES:
 - CENTER CONTACTS-GOLD PLATE PER ASTM-B488
 - SPRING WASHER- SILVER PLATE PER ASTM-B700
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 75 OHMS
 - VOLTAGE RATING: 500 VRMS
 - FREQUENCY RANGE: DC TO 3 GHz

REVISIONS

ISSUE	CHANGES
0	ER 39338 JPK 09/29/05
1	CN 39621 A BAM 09/13/06

2065-29-9SD

SCALE 4 : 1

APPROX SURFACE AREA N/A

USED ON

REF: EQR 944

PL, 75 BNC

DRAWN JLA	DATE 07/27/05
DESIGN JLA	DATE 07/27/05
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2065-29-9

GSD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Winchester Interconnect:](#)

[2065-29-9](#)