


SD

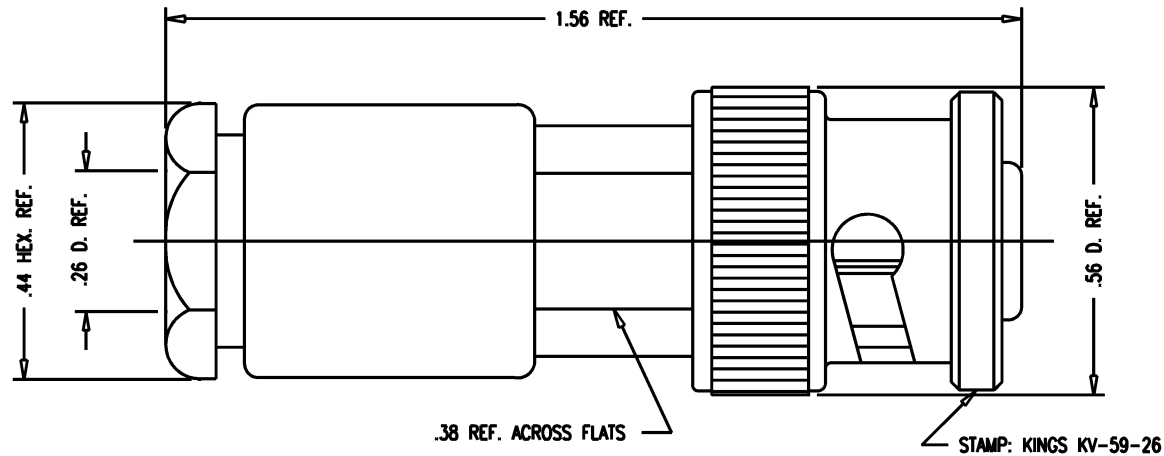

NOTES:

1. FOR USE WITH RG-59, 62, 71 & 210/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-1002.
3. INTERFACE PER MIL-STD-348, FIG. 303-1.
4. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKETS: SILICONE RUBBER, ZZ-R-765
SPRING WASHER: BER. COPPER, ASTM-B-194
ALL OTHER METAL PARTS: BRASS, ASTM-B16
5. FINISHES:
CENTER CONTACT } SILVER PLATE PER QQ-S-365
SPRING WASHER }
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: NON-CONSTANT
OPERATING VOLTAGE: 3500 VOLTS RMS
5000 VOLTS DC

KV-59-26

REVISIONS

ISSUE	CHANGES
4	CN 37222 C REDRAWN KH 02/18/97
5	CN 37342 C MRM 04/29/97

KV5926B

SCALE : 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, MHV, M

DRAWN	KH	DATE	02/18/97
DESIGN	LI	DATE	02/19/97
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KV-59-26

SD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Winchester Interconnect:](#)

[KV-59-26](#)