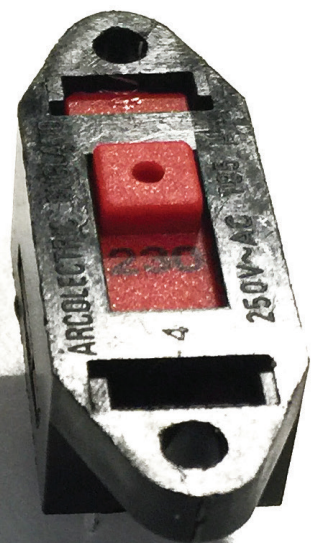
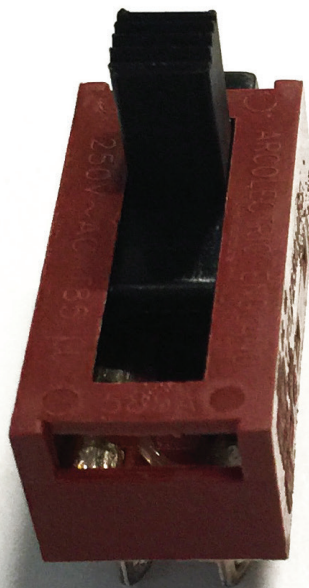
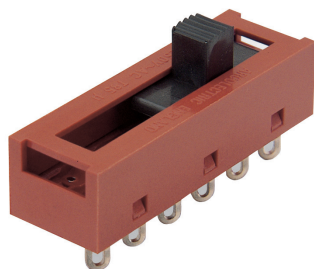


With up to 5 switching positions as well as multiple terminal, circuit and slider options, Bulgin's board mounted power slide switches can be configured to suit your needs. We also offer a wide range of voltage selector types that can be either snapped into a panel or flange mounted.

- ⊞ Ratings up to 16A, 250V ac
- ⊞ PCB and solder terminals
- ⊞ Voltage Selector Models
- ⊞ Snap in and flange mounting
- ⊞ 2, 3, 4 and 5 position
- ⊞ Choice of circuits
- ⊞ Choice of actuators







Key Features

- Slide switches
- Ratings up to 16A, 250V ac
- PCB and solder terminals
- 2, 3, 4 and 5 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

-  10A 250Vac T85
 6(3)A 250Vac T85
-  UL CSA 16A 250Vac Non Inductive
 UL CSA 4A 300Vac
 UL 65°C, file no. E45221, CSA file no. LR10990
- µ contact gap
 Please specify: Standard action (SP116) or Light
 action (SP118).
 2000 series lubrication is inorganic and does not
 degrade plastics.

| Terminal | Series | Position | Circuit | Slider | | | |
|--|---------------------------------|---|---|---|---|---|---|
| <div>K 2.8 x 0.8</div> | 2 | 2 Switching positions | <div>10 </div> <div>20 </div> <div>30 </div> <div>40 </div> | <div>0 </div> <div>1 </div> <div>2 </div> <div>3 </div> <div>4 </div> <div>5 </div> | <div>6 </div> <div>7 </div> <div>9 </div> <div>A </div> <div>B </div> <div>C </div> | <div>D </div> <div>E </div> <div>G </div> <div>H </div> <div>J </div> <div>K </div> | <div>L </div> <div>N </div> <div>P </div> <div>R </div> <div>S </div> <div>T </div> |
| <div>R 2.8 x 0.8</div> | 3 Switching positions | <div>10 </div> <div>20 </div> <div>30 </div> <div>40 </div> | <div>10 </div> <div>20 </div> <div>30 </div> <div>40 </div> | | | | |
| <div>T Solder</div> | | 4 Switching positions | <div>10 </div> <div>20 </div> <div>30 </div> <div>40 </div> | <div>10 </div> <div>20 </div> <div>30 </div> <div>40 </div> | | | |
| <div>X PCB 0.8 Sq.</div> | | 5 Switching positions | <div>10 </div> <div>20 </div> <div>30 </div> <div>40 </div> | <div>10 </div> <div>20 </div> <div>30 </div> <div>40 </div> | | | |
| <div>Y PCB 0.8 Sq.</div> <div>For mounting stability switches have extra "support" terminals</div> <div>* Nominal - Dimension varies with body type. For exact figure call sales</div> | | | | | | | |

Examples



X22205C ---



T2220EC ---



T23206A ---





















T24306A ---



T25302A ---

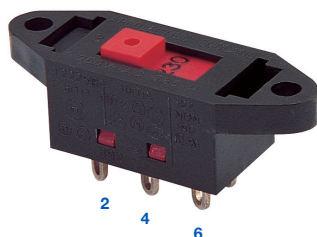


T25100A ---

| Body | Options | Dimensions | | |
|--|--|---|---|--|
| <div> <p>C 2 positions</p>  </div> <div> <p>H 2 positions</p>  </div> <div> <p>A 3 positions</p>  </div> <div> <p>H 3 positions</p>  </div> <div> <p>A 4 positions</p>  </div> <div> <p>H 4 positions</p>  </div> <div> <p>A 5 positions</p>  </div> | <p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing A wide range is available For all options call sales</p> | <p>C 2 positions</p>  <p>A 3 positions</p>  <p>A 4 positions</p>  <p>A 5 positions</p>  | <p>H 2 positions</p>  <p>H 3 positions</p>  <p>H 4 positions</p>  | <p>Cut-out /PCB Matrix</p>  <p>for PCB</p>  <p>for PCB</p>  <p>for PCB</p>  <p>for PCB</p> |

2000 Slide Switches - Snap fit and panel mount

10A 250Vac



115/230 is preferred legend

Key Features

- 2 way 'voltage selector'
- Ratings up to 16A, 250V ac
- Snap fit and panel mount
- PCB & solder terminals
- 2 and 3 position
- Choice of circuits
- Choice of actuators

Approvals and specifications

10A 250Vac T85
6(3)A 250Vac T85

UL CSA 16A 250Vac Non Inductive
UL CSA 4A 300Vac
UL 65°C, file no. E45221, CSA file no. LR10990

μ contact gap
Please specify: Standard action (SP116) or Light action (SP118).
2000 series lubrication is inorganic and does not degrade plastics.

| Terminal | Series | Position | Circuit | Slider | | | |
|--|---------------------------------|---------------------------------|---------------|--------------|--------------|--------------|--------------|
| <div>K 2.8 x 0.8</div> | 2 | 2 Switching positions | 10 | 0 | 6 | C | L |
| <div>R 2.8 x 0.8</div> | | | 20 | 2 | 7 | D | M |
| <div>T Solder</div> | | | 30 | 3 | 8 | E | N |
| <div>X PCB 0.8 Sq. For mounting stability switches have extra "support" terminals * Nominal - Dimension varies with body type. For exact figure call sales</div> | | | 40 | 4 | 9 | H | P |
| | 3 Switching positions | 3 Switching positions | 10 | 5 | A | K | R |
| | | | 20 | S | T | | |
| | | | 30 | | | | |
| | | | 40 | | | | |

Examples



T22208E ---



T22308E ---



T2230MF ---





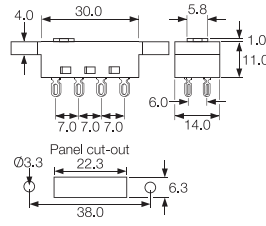






T22205B ---



T22305B ---



T23204B ---

| Body | Options | Dimensions | | | | | | | | | | | |
|---|---|--|--|-----------------|---------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| <div>B</div> <div>With mounting holes</div> <div></div> | <div>Colour</div> <div>Call sales for custom colours. A full range is available for large orders. Standard body colour is black.</div> | <div>2 Pos B</div> <div></div> | <div>3 Pos B</div> <div></div> | | | | | | | | | | |
| <div>E</div> <div>Snap fit</div> <div></div> | | <div>2 Pos E</div> <div></div> | <div></div> <div><table><tr><th>Panel thickness</th><th>Dim. Y</th></tr><tr><td>0.8-1.2</td><td>29.75/29.85</td></tr><tr><td>1.63</td><td>30.15/30.25</td></tr><tr><td>2.0</td><td>30.35/30.45</td></tr><tr><td>2.5</td><td>30.55/30.65</td></tr></table></div> | Panel thickness | Dim. Y | 0.8-1.2 | 29.75/29.85 | 1.63 | 30.15/30.25 | 2.0 | 30.35/30.45 | 2.5 | 30.55/30.65 |
| Panel thickness | | Dim. Y | | | | | | | | | | | |
| 0.8-1.2 | 29.75/29.85 | | | | | | | | | | | | |
| 1.63 | 30.15/30.25 | | | | | | | | | | | | |
| 2.0 | 30.35/30.45 | | | | | | | | | | | | |
| 2.5 | 30.55/30.65 | | | | | | | | | | | | |
| <div>F</div> <div>Snap fit (single contact ON OFF only)</div> <div></div> | <div>2 Pos F</div> <div></div> | <div></div> <div><table><tr><th>Panel thickness</th><th>Dim. Y</th></tr><tr><td>0.8-1.2</td><td>29.75/29.85</td></tr><tr><td>1.63</td><td>30.15/30.25</td></tr><tr><td>2.0</td><td>30.35/30.45</td></tr><tr><td>2.5</td><td>30.55/30.65</td></tr></table></div> | Panel thickness | Dim. Y | 0.8-1.2 | 29.75/29.85 | 1.63 | 30.15/30.25 | 2.0 | 30.35/30.45 | 2.5 | 30.55/30.65 | |
| Panel thickness | Dim. Y | | | | | | | | | | | | |
| 0.8-1.2 | 29.75/29.85 | | | | | | | | | | | | |
| 1.63 | 30.15/30.25 | | | | | | | | | | | | |
| 2.0 | 30.35/30.45 | | | | | | | | | | | | |
| 2.5 | 30.55/30.65 | | | | | | | | | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bulgin:

[T22208EAAG](#) [T22205BABE](#) [X22205CAAK](#) [T22205BAAC](#) [T22205BAAA](#) [K22208EAAL](#)