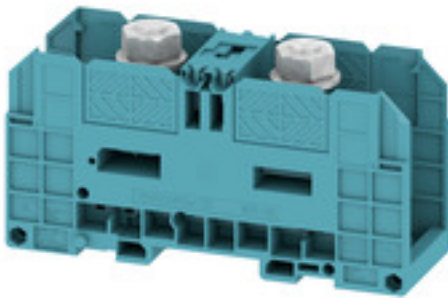


**WFF 120 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image**

The comprehensive range of stud terminals ensures secure connections for all power transmission applications. Connections range from 10 mm<sup>2</sup> to 300 mm<sup>2</sup>. The connectors are attached to the threaded pins using crimped cable lugs and each connection is secured by tightening the hexagon nut. Stud terminals with threaded pins from M5 to M16 can be used according to the wire cross-section.

**General ordering data**

|            |                                                                                                                       |
|------------|-----------------------------------------------------------------------------------------------------------------------|
| Version    | Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 120 mm <sup>2</sup> , Threaded stud connection |
| Order No.  | <a href="#">1028580000</a>                                                                                            |
| Type       | WFF 120 BL                                                                                                            |
| GTIN (EAN) | 4008190121808                                                                                                         |
| Qty.       | 5 pc(s).                                                                                                              |

## WFF 120 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 88.5 mm    | Depth (inches) | 3.484 inch |
| Depth including DIN rail | 88.5 mm    | Height         | 132 mm     |
| Height (inches)          | 5.197 inch | Width          | 42 mm      |
| Width (inches)           | 1.654 inch | Net weight     | 243.12 g   |

## Temperatures

|                                  |                |                                  |                                                                                                   |
|----------------------------------|----------------|----------------------------------|---------------------------------------------------------------------------------------------------|
| Storage temperature              |                | Operating temperature range      | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity |
|                                  | -25 °C...55 °C |                                  |                                                                                                   |
| Continuous operating temp., min. | -50 °C         | Continuous operating temp., max. | 120 °C                                                                                            |

## Material data

|                           |       |        |      |
|---------------------------|-------|--------|------|
| Material                  | Wemid | Colour | blue |
| UL 94 flammability rating | V-0   |        |      |

## Rating data IECEx/ATEX

|                             |                                                                                                   |                                 |                     |
|-----------------------------|---------------------------------------------------------------------------------------------------|---------------------------------|---------------------|
| Certificate No. (IECEX)     | IECEXULD15.0004U                                                                                  | Max. voltage (IECEX)            | 1100 V              |
| Current (IECEX)             | 269 A                                                                                             | Wire cross section max. (IECEX) | 120 mm <sup>2</sup> |
| Operating temperature range | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity | Marking EN 60079-7              |                     |
| Ex 2014/34/EU label         | II 2 G D                                                                                          |                                 | Ex eb II C Gb       |

## System specifications

|                                     |    |                                   |       |
|-------------------------------------|----|-----------------------------------|-------|
| End cover plate required            | No | Number of levels                  | 1     |
| Number of clamping points per level | 2  | Levels cross-connected internally | No    |
| PE connection                       | No | Rail                              | TS 35 |

## Additional technical data

|                          |        |                             |         |
|--------------------------|--------|-----------------------------|---------|
| Explosion-tested version | Yes    | Number of similar terminals | 1       |
| Open sides               | closed | Type of mounting            | Snap-on |

## CSA rating data

|                               |                |                               |           |
|-------------------------------|----------------|-------------------------------|-----------|
| Certificate No. (CSA)         | 200039-1244019 | Current size C (CSA)          | 310 A     |
| Voltage size C (CSA)          | 600 V          | Wire cross section max. (CSA) | 250 kcmil |
| Wire cross section min. (CSA) | 10 AWG         |                               |           |

## Conductors for clamping (rated connection)

|                           |                          |                                |                          |
|---------------------------|--------------------------|--------------------------------|--------------------------|
| 2 x cable lugs DIN 46 234 | 6 to 120 mm <sup>2</sup> | 2 x cable lugs DIN 46 235      | 16...120 mm <sup>2</sup> |
| Cable lug to DIN 46234    | 6...150 mm <sup>2</sup>  | Cable lug to DIN 46235         | 16...150 mm <sup>2</sup> |
| Clamping range, max.      | 150 mm <sup>2</sup>      | Clamping range, min.           | 6 mm <sup>2</sup>        |
| Number of connections     | 2                        | Stud size for spade connection | M 10                     |
| Tightening torque, max.   | 20 Nm                    | Tightening torque, min.        | 10 Nm                    |
| Type of connection        | Threaded stud connection |                                |                          |

## WFF 120 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## General

|      |       |
|------|-------|
| Rail | TS 35 |
|------|-------|

## Rating data

|                                 |                     |                                              |         |
|---------------------------------|---------------------|----------------------------------------------|---------|
| Rated cross-section             | 120 mm <sup>2</sup> | Rated voltage                                | 1,000 V |
| Rated DC voltage                | 1,500 V DC          | Rated current                                | 269 A   |
| Current at maximum wires        | 309 A               | Volume resistance according to IEC 60947-7-x | 0.12 mΩ |
| Rated impulse withstand voltage | 8 kV                | Power loss in accordance with IEC 60947-7-x  | 8.61 W  |
| Pollution severity              | 3                   |                                              |         |

## UL rating data

|                                         |        |                                         |           |
|-----------------------------------------|--------|-----------------------------------------|-----------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 250 kcmil |
| Conductor size Factory wiring min. (UR) | 10 AWG | Conductor size Field wiring max. (UR)   | 250 kcmil |
| Conductor size Field wiring min. (UR)   | 10 AWG | Current size C (UR)                     | 310 A     |
| Voltage size C (UR)                     | 1000 V |                                         |           |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 |             |             |

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E60693  |

## WFF 120 BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Technical data

### Downloads

Approval/Certificate/Document of  
Conformity

[Attestation of Conformity](#)  
[Attestation of Conformity](#)  
[CB Certificate](#)  
[EAC certificate](#)  
[DNVGL certificate](#)  
[MARITREG Certificate](#)  
[POLSKIREJ certificate](#)  
[CCC Ex Certificate](#)  
[ATEX Certificate](#)  
[IECEX Certificate](#)  
[CE Declaration of Conformity](#)  
[CE Declaration of Conformity all terminals](#)

Engineering Data

[CAD data – STEP](#)

Engineering Data

[EPLAN, WSCAD, Zuken E3.S](#)

User Documentation

[StorageConditionsTerminalBlocks](#)  
[WFF range for 1500 VDC applications](#)  
[DIRECT MOUNTING WFF TERMINAL BLOCKS](#)  
[NTI WFF 120](#)

Catalogues

[Catalogues in PDF-format](#)

Brochures

## WFF 120 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Step-down bridges



Reducing cross-connectors enable simple and fast connection of terminal blocks with different rated cross-sections.

## General ordering data

|            |                            |                                                     |
|------------|----------------------------|-----------------------------------------------------|
| Type       | SMSE WF10/2XM6             | Version                                             |
| Order No.  | <a href="#">1868880000</a> | Bolt-type screw terminals, Busbar, Number of poles: |
| GTIN (EAN) | 4032248499755              |                                                     |
| Qty.       | 10 pc(s).                  |                                                     |

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                         |
|------------|----------------------------|---------------------------------------------------------|
| Type       | WS 12/6.5 MC NE WS         | Version                                                 |
| Order No.  | <a href="#">1609920000</a> | WS, Terminal marker, 12 x 6.5 mm, Pitch in mm (P): 6.50 |
| GTIN (EAN) | 4008190203511              | Weidmueller, Allen-Bradley, white                       |
| Qty.       | 540 pc(s).                 |                                                         |

## WFF 120 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Custom printing



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                         |
|------------|----------------------------|---------------------------------------------------------|
| Type       | WS 12/6.5 MC SDR           | Version                                                 |
| Order No.  | <a href="#">1609930000</a> | WS, Terminal marker, 12 x 6.5 mm, Pitch in mm (P): 6.50 |
| GTIN (EAN) | 4008190456665              | Weidmueller, Allen-Bradley, To customer specification   |
| Qty.       | 108 pc(s).                 |                                                         |

## Protective covers



Protective covers or protective caps are attached to the respective connection area of the terminal blocks. They provide protection against electric shock caused by accidental contact with live parts due to operation or faults.

## General ordering data

|            |                            |                                                          |
|------------|----------------------------|----------------------------------------------------------|
| Type       | WAP WFF 120                | Version                                                  |
| Order No.  | <a href="#">1073000000</a> | Bolt-type screw terminals, cover plate, dark beige, 2 mm |
| GTIN (EAN) | 4008190475260              |                                                          |
| Qty.       | 20 pc(s).                  |                                                          |
| Type       | WAH 120                    | Version                                                  |
| Order No.  | <a href="#">1064660000</a> | Bolt-type screw terminals, Hood, beige, 41 mm            |
| GTIN (EAN) | 4008190100797              |                                                          |
| Qty.       | 20 pc(s).                  |                                                          |
| Type       | WAH 120/KURZ               | Version                                                  |
| Order No.  | <a href="#">1070460000</a> | Bolt-type screw terminals, Hood, beige, 40.6 mm          |
| GTIN (EAN) | 4008190191047              |                                                          |
| Qty.       | 10 pc(s).                  |                                                          |

**WFF 120 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories**

|            |                            |                                              |
|------------|----------------------------|----------------------------------------------|
| Type       | WAH 120 BL                 | Version                                      |
| Order No.  | <a href="#">1064680000</a> | Bolt-type screw terminals, Hood, blue, 41 mm |
| GTIN (EAN) | 4008190063931              |                                              |
| Qty.       | 20 pc(s).                  |                                              |

**W-Series**

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

**General ordering data**

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | WEW 35/1                   | Version               |
| Order No.  | <a href="#">1059000000</a> | W-Series, End bracket |
| GTIN (EAN) | 4008190172282              |                       |
| Qty.       | 50 pc(s).                  |                       |

**WF / WFF-Series**

A partition plate is used for the optical separation of circuits or used for electrical isolation from neighbouring cross-connectors. In contrast to the end plate, the contour can be larger than the adjacent terminal blocks. However, it should not be smaller, as otherwise the required clearance and creepage distances within the application can no longer be maintained.

**General ordering data**

|            |                            |                                                        |
|------------|----------------------------|--------------------------------------------------------|
| Type       | WTW WFF120                 | Version                                                |
| Order No.  | <a href="#">1067300000</a> | Bolt-type screw terminals, Partition plate, grey, 2 mm |
| GTIN (EAN) | 4008190093037              |                                                        |
| Qty.       | 10 pc(s).                  |                                                        |

**WFF 120 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****WF/WFF-Series****WF/WFF**  
Series

The additional connection enables a separate voltage tap. This can be used, for example, for the emergency power supply before the main switch or simply as an additional connection within the application.

**General ordering data**

|            |                            |                                 |
|------------|----------------------------|---------------------------------|
| Type       | WZAF 120                   | Version                         |
| Order No.  | <a href="#">1066300000</a> | W-Series, Additional connection |
| GTIN (EAN) | 4008190024642              |                                 |
| Qty.       | 10 pc(s).                  |                                 |

**Miscellaneous**

We offer a broad portfolio of mounting support for easy handling and supplementation of our products. From various tools to insulating sleeves and various screws, our components are matched to each other down to the last detail and thus facilitate assembly in compliance with the respective standards and protective regulations.

**General ordering data**

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | CPSB M10                   | Version                                                   |
| Order No.  | <a href="#">0156400000</a> | Bolt-type screw terminals, Copper-plated aluminium washer |
| GTIN (EAN) | 4008190049935              |                                                           |
| Qty.       | 50 pc(s).                  |                                                           |

## WFF 120 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Standard



Screwable cross-connections are easy to mount and de mount. Thanks to the big contact surface, even high currents can be transmitted with maximum contact reliability.

## General ordering data

|            |                            |                                                                |
|------------|----------------------------|----------------------------------------------------------------|
| Type       | WQL 2 WFF120               | Version                                                        |
| Order No.  | <a href="#">1065100000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 2 |
| GTIN (EAN) | 4008190133771              |                                                                |
| Qty.       | 5 pc(s).                   |                                                                |
| Type       | WQL 3 WFF120               | Version                                                        |
| Order No.  | <a href="#">1065600000</a> | Bolt-type screw terminals, Cross-connector, Number of poles: 3 |
| GTIN (EAN) | 4008190021641              |                                                                |
| Qty.       | 5 pc(s).                   |                                                                |

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                           |
|------------|----------------------------|-----------------------------------------------------------|
| Type       | DEK 5/5 MC NE WS           | Version                                                   |
| Order No.  | <a href="#">1609801044</a> | Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00 |
| GTIN (EAN) | 4008190397111              | Weidmueller, white                                        |
| Qty.       | 1,000 pc(s).               |                                                           |

**WFF 120 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****WS 12/6.5****WS/ DEK**

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

**Your benefits with MultiMark**

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

**General ordering data**

|            |                            |                                                      |
|------------|----------------------------|------------------------------------------------------|
| Type       | WS 12/6.5 MM WS            | Version                                              |
| Order No.  | <a href="#">2619930000</a> | WS, Terminal marker, 12 x 6.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118626155              |                                                      |
| Qty.       | 600 pc(s).                 |                                                      |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Weidmuller:](#)

[1028580000](#)