

OSRAM LZ1-00R702

Datasheet

Published by **ams-OSRAM AG**

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

ams-osram.com


© All rights reserved



LED ENGINE LuxiGen®

LZ1-00R702

Industry's most robust high power ceramic package with glass lens for high performance over life.

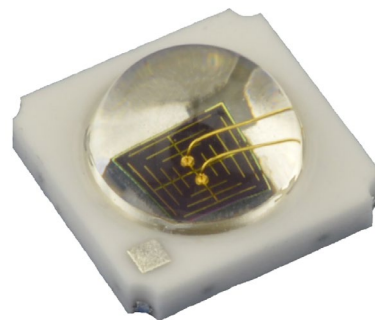

Applications

- Access Control & Security
- Appliances & Tools
- Factory Automation
- Home & Building Automation
- Material Processing
- Medical Lighting
- Robotics

Features

- Package: Ceramic package with integrated glass lens
- Chip technology: IR Thinfilm
- Typ. Radiation: 90°
- Color: $\lambda_{\text{peak}} = 940 \text{ nm}$ (• infrared (940 nm))
- Double stack emitter

Ordering Information

| Type | Total radiant flux ¹⁾ I _F = 1000 mA Φ _E | Ordering Code |
|-----------------|--|---------------|
| LZ1-00R702-0000 | 950 ... 1600 mW | Q65113A1997 |

Maximum Ratings

| Parameter | Symbol | | Values |
|---|-----------------------|---------------------------------------|---------|
| Operating Temperature | T_{op} | min. | -40 °C |
| | | max. | 125 °C |
| Storage Temperature | T_{stg} | min. | -40 °C |
| | | max. | 125 °C |
| Junction Temperature ²⁾ | T_j | max. | 145 °C |
| Forward Current ²⁾ | I_F | max. | 1200 mA |
| Forward Current pulsed $t \leq 150 \mu s$; $D \leq 0.1$; $T_C = 25 \text{ °C}$ | $I_{F \text{ pulse}}$ | max. | 5000 mA |
| ESD withstand voltage acc. ANSI/ESDA/JEDEC JS-001 (HBM, Class 0) | V_{ESD} | ESD sensitive device | |
| Reverse voltage ³⁾ | V_R | Not designed for reverse operation | |

Characteristics

 $I_F = 1000 \text{ mA}$; $T_C = 25 \text{ °C}$

| Parameter | Symbol | Values | |
|--|-------------------------|------------------------------------|-----------|
| Total radiant flux ⁴⁾ | Φ_E | typ. | 1350 mW |
| Peak Wavelength ⁵⁾ $I_F = 1000 \text{ mA}$ | λ_{peak} | min. | 920 nm |
| | | typ. | 940 nm |
| | | max. | 960 nm |
| Viewing angle at 50% I_V | 2ϕ | typ. | 90 ° |
| Forward Voltage ⁶⁾⁴⁾ $I_F = 1000 \text{ mA}$ | V_F | min. | 2.70 V |
| | | typ. | 3.00 V |
| | | max. | 3.70 V |
| Reverse current ³⁾ | I_R | Not designed for reverse operation | |
| Electrical thermal resistance junction/case | $R_{\text{thJC elec.}}$ | typ. | 6.0 K / W |

Brightness Groups

| Group | Total radiant flux ¹⁾ $I_F = 1000 \text{ mA}$ min. Φ_E | Total radiant flux ¹⁾ $I_F = 1000 \text{ mA}$ max. Φ_E |
|-------|---|---|
| L44M | 950 mW | 1250 mW |
| N | 1250 mW | 1600 mW |

Wavelength Groups

| Group | Peak Wavelength ⁵⁾ $I_F = 1000 \text{ mA}$ min. λ_{peak} | Peak Wavelength ⁵⁾ $I_F = 1000 \text{ mA}$ max. λ_{peak} |
|-------|---|---|
| F09 | 920 nm | 960 nm |


Group Name on Label

Example: L44M-F09

| Brightness | Wavelength |
|------------|------------|
| L44M | F09 |


Relative Spectral Emission ⁴⁾

$I_{\text{rel}} = f(\lambda)$; $I_F = 1000 \text{ mA}$; $T_C = 25 \text{ °C}$

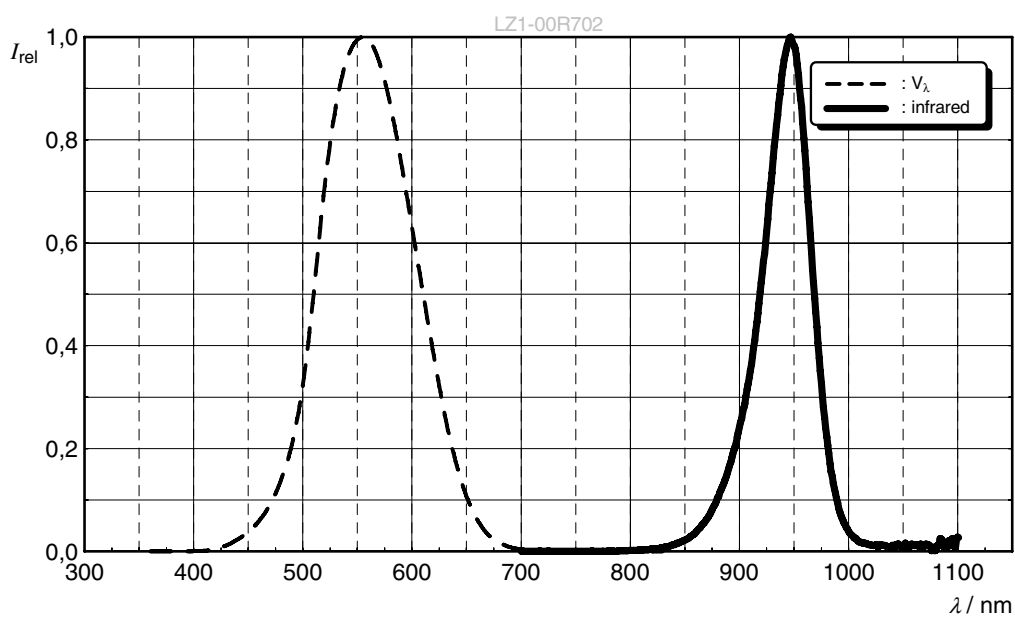


Radiation Characteristics ⁴⁾

$I_{\text{rel}} = f(\phi)$; $T_C = 25 \text{ °C}$

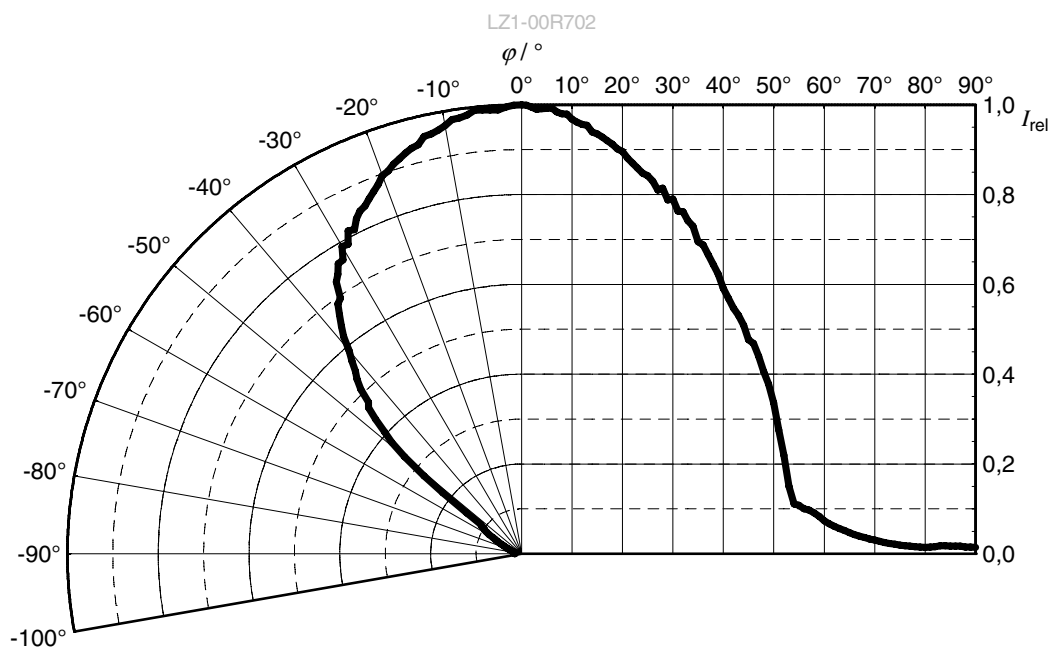


Forward current ⁴⁾

$$I_F = f(V_F); T_C = 25\text{ °C}$$

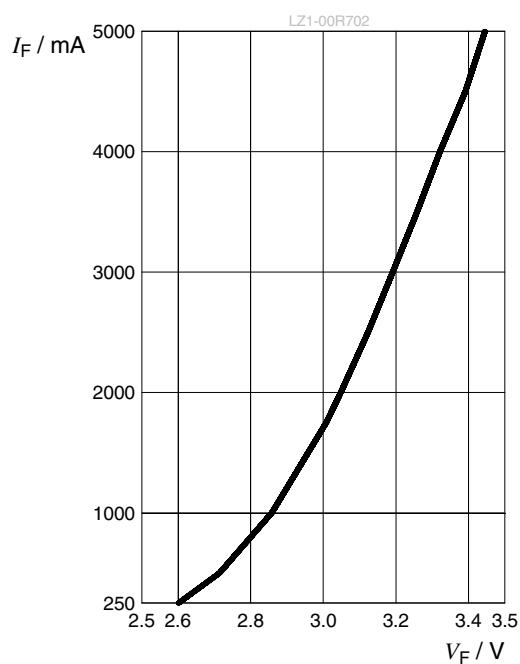


Relative Radiant Power ^{4), 7)}

$$\Phi_E / \Phi_E(1000\text{ mA}) = f(I_F); T_C = 25\text{ °C}$$

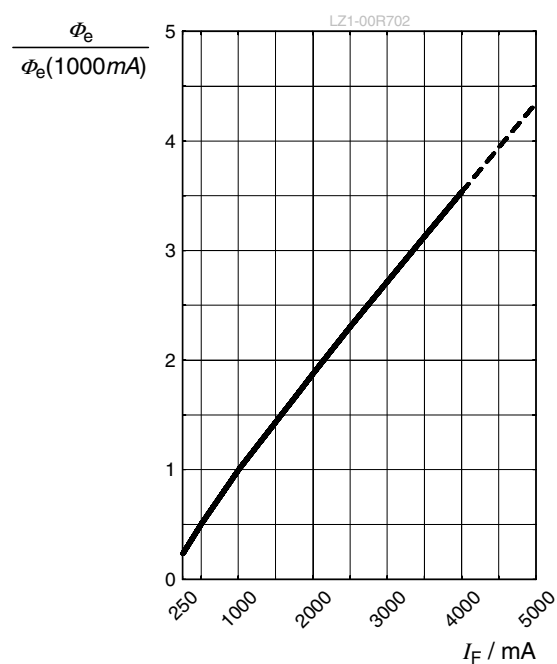


Peak Wavelength ⁴⁾

$$\Delta\lambda_{\text{peak}} = f(I_F); T_C = 25\text{ °C}$$

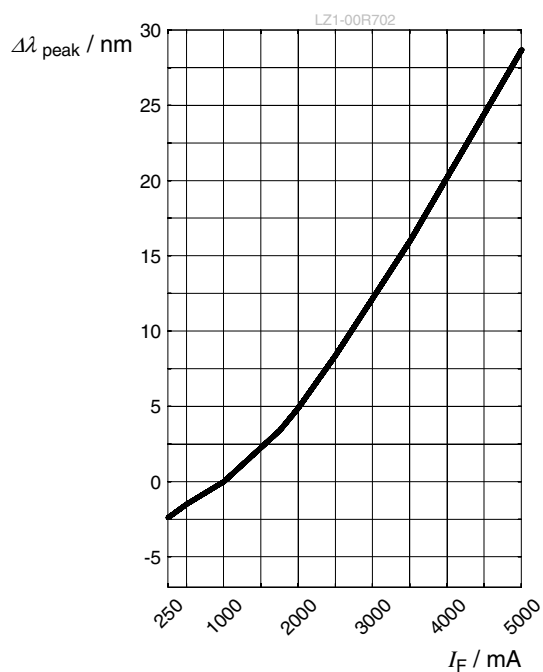


Forward Voltage ⁴⁾

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

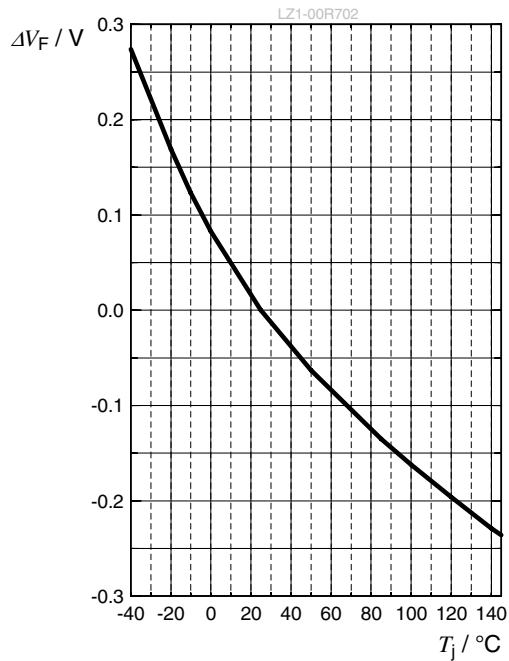


Relative Radiant Power ⁴⁾

$$\Phi_E / \Phi_E(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

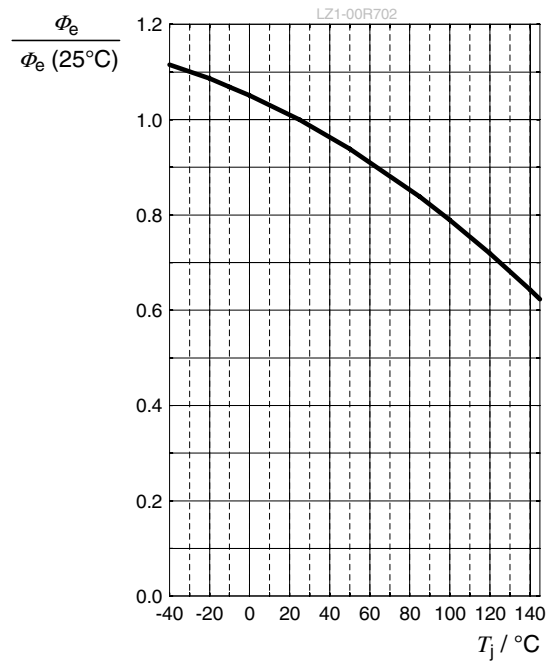


Peak Wavelength ⁴⁾

$$\Delta \lambda_{\text{peak}} = \lambda_{\text{peak}} - \lambda_{\text{peak}}(25^\circ\text{C}) = f(T_j); I_F = 1000 \text{ mA}$$

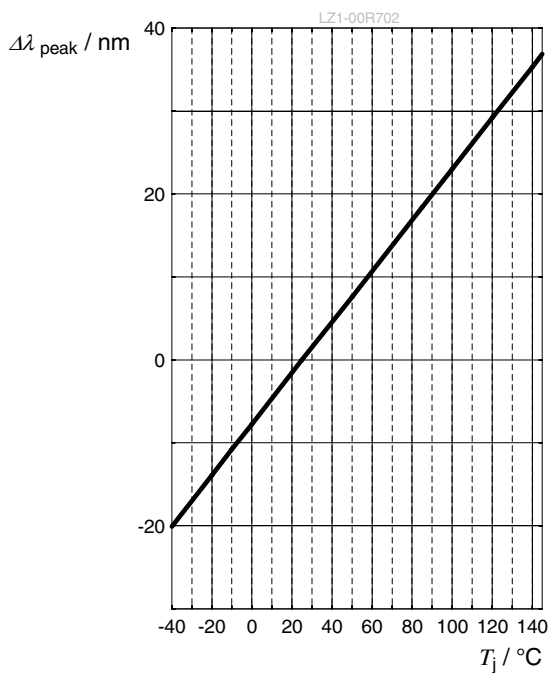


Max. Permissible Forward Current ⁸⁾

$$I_F = f(T)$$

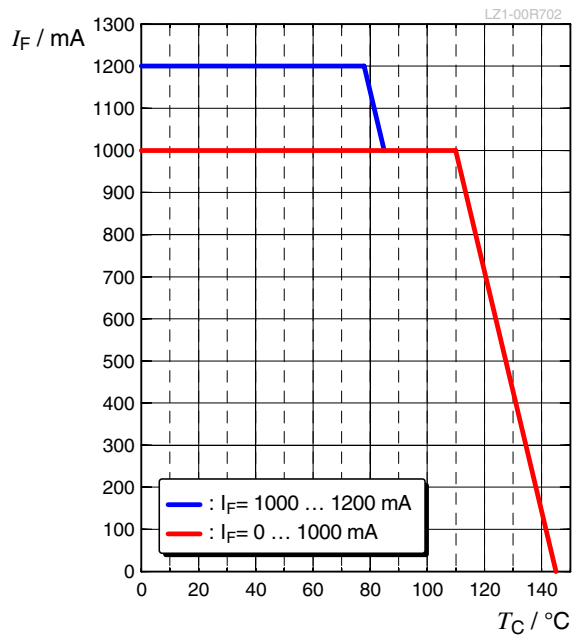

Dimensional Drawing ⁹⁾

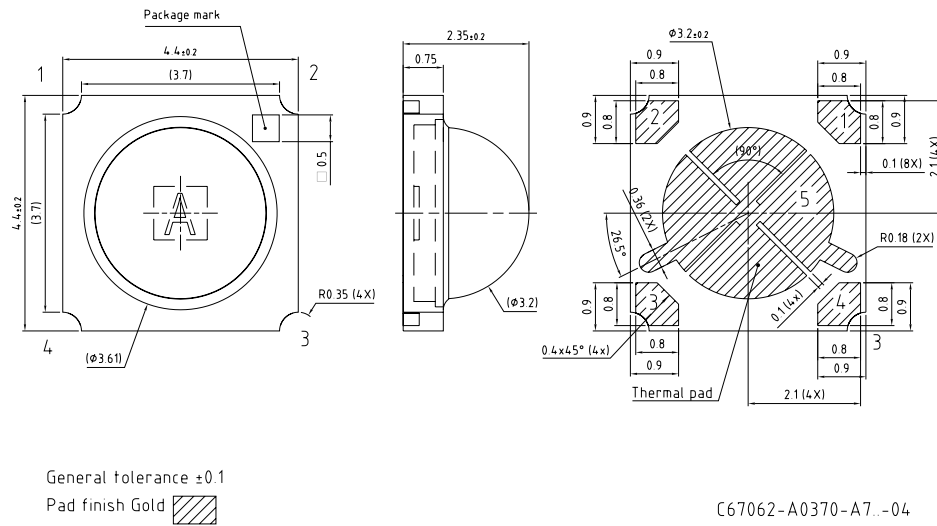


Further Information:

Approximate Weight: 93.9 mg


Electrical Internal Circuit

| Pin Out | |
|---------|----------|
| Pad | Function |
| 1 | Cathode |
| 2 | Anode |
| 3 | Anode |
| 4 | Cathode |
| 5 | Thermal |

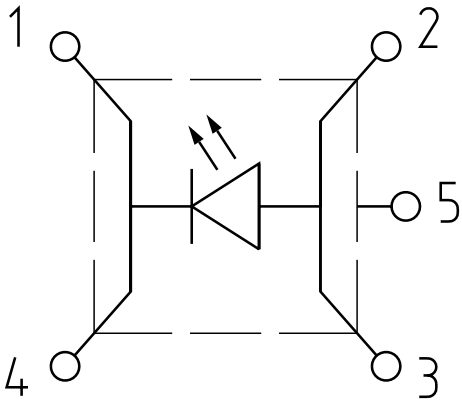


Recommended Solder Pad ⁹⁾


Non-pedestal MCPCB Design

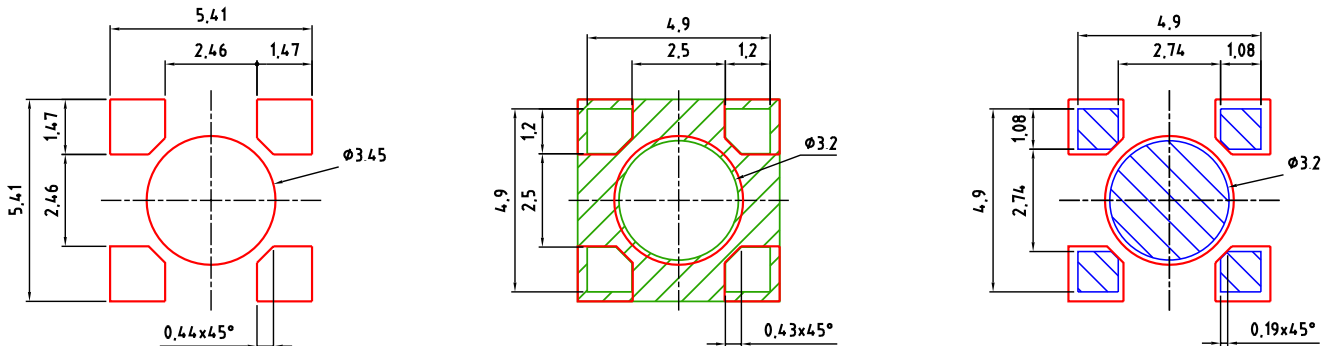

Pedestal MCPCB Design

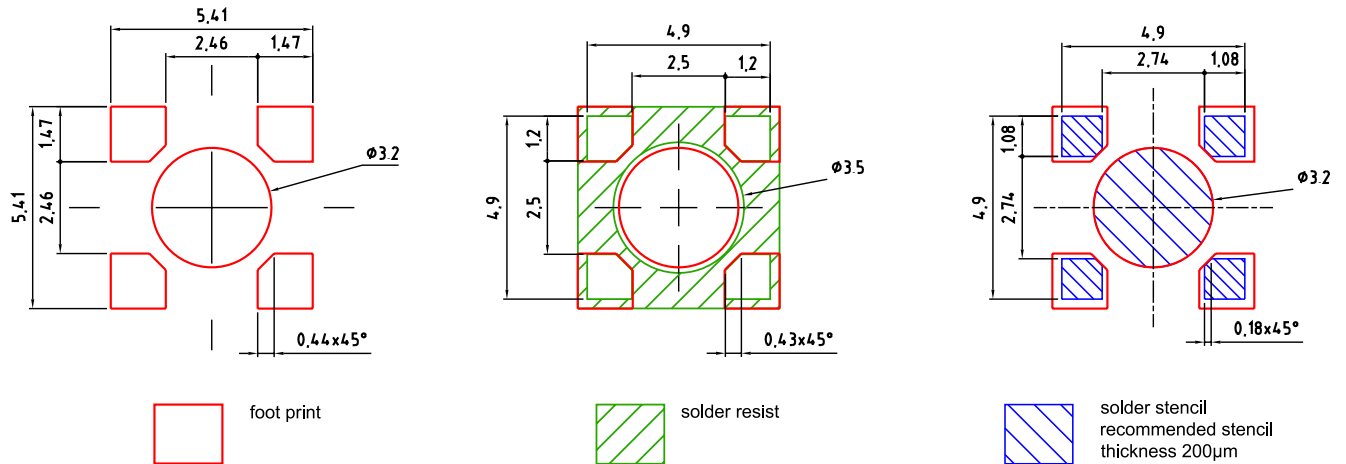

Component Location on Pad

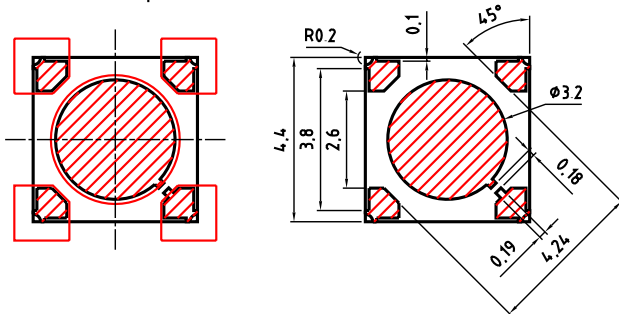

E062 3010 296-01

1. For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere.
2. Package not suitable for ultra sonic cleaning.
3. Pedestal MCPCB allows the emitter thermal slug to be soldered directly to the metal core of the MCPCB. Such MCPCB eliminate the high thermal resistance dielectric layer that standard MCPCB technologies use in between the emitter thermal slug and the metal core of the MCPCB, thus lowering the overall system thermal resistance.
4. X-ray sample monitoring for solder voids underneath the emitter thermal slug is recommended. The total area covered by solder voids should be less than 20% of the total emitter thermal slug area. Excessive solder voids will increase the emitter to MCPCB thermal resistance and may lead to higher failure rates due to thermal over stress.

Reflow Soldering Profile

Product complies to MSL Level 1 acc. to JEDEC J-STD-020E




| Profile Feature | Symbol | Pb-Free (SnAgCu) Assembly | | | Unit |
|--|--------|---------------------------|----------------|---------|--------------------|
| | | Minimum | Recommendation | Maximum | |
| Ramp-up rate to preheat ^{*)} 25 °C to 150 °C | | | 2 | 3 | K/s |
| Time t_s T_{Smin} to T_{Smax} | t_s | 60 | 100 | 120 | s |
| Ramp-up rate to peak ^{*)} T_{Smax} to T_p | | | 2 | 3 | K/s |
| Liquidus temperature | T_L | | 217 | | $^{\circ}\text{C}$ |
| Time above liquidus temperature | t_L | | 80 | 100 | s |
| Peak temperature | T_p | | 245 | 260 | $^{\circ}\text{C}$ |
| Time within 5 °C of the specified peak temperature $T_p - 5 \text{ K}$ | t_p | 10 | 20 | 30 | s |
| Ramp-down rate* T_p to 100 °C | | | 3 | 6 | K/s |
| Time 25 °C to T_p | | | | 480 | s |

All temperatures refer to the center of the package, measured on the top of the component


* slope calculation DT/Dt : Dt max. 5 s; fulfillment for the whole T-range

Taping ⁹⁾

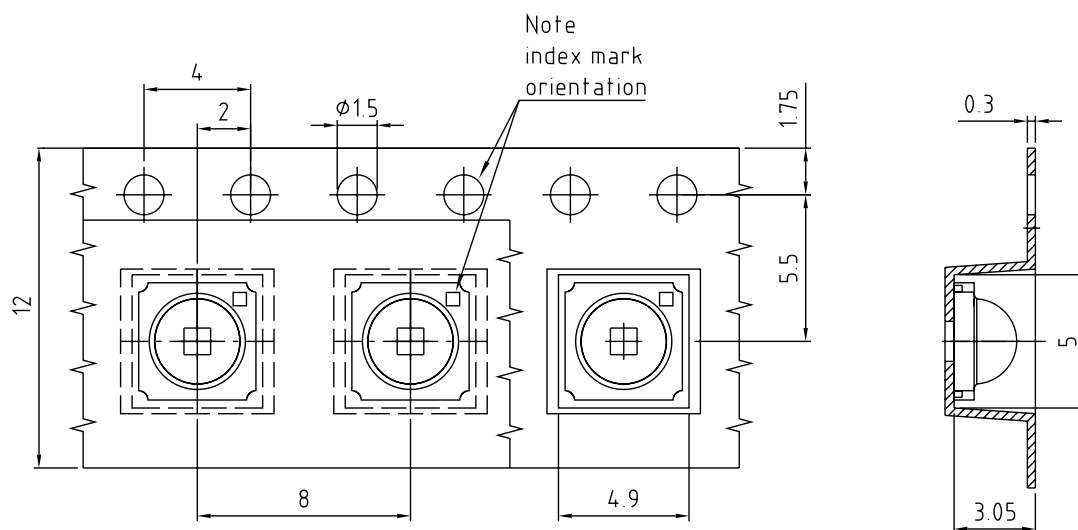

C67062-A0370-B1-01

Tape and Reel ¹⁰⁾

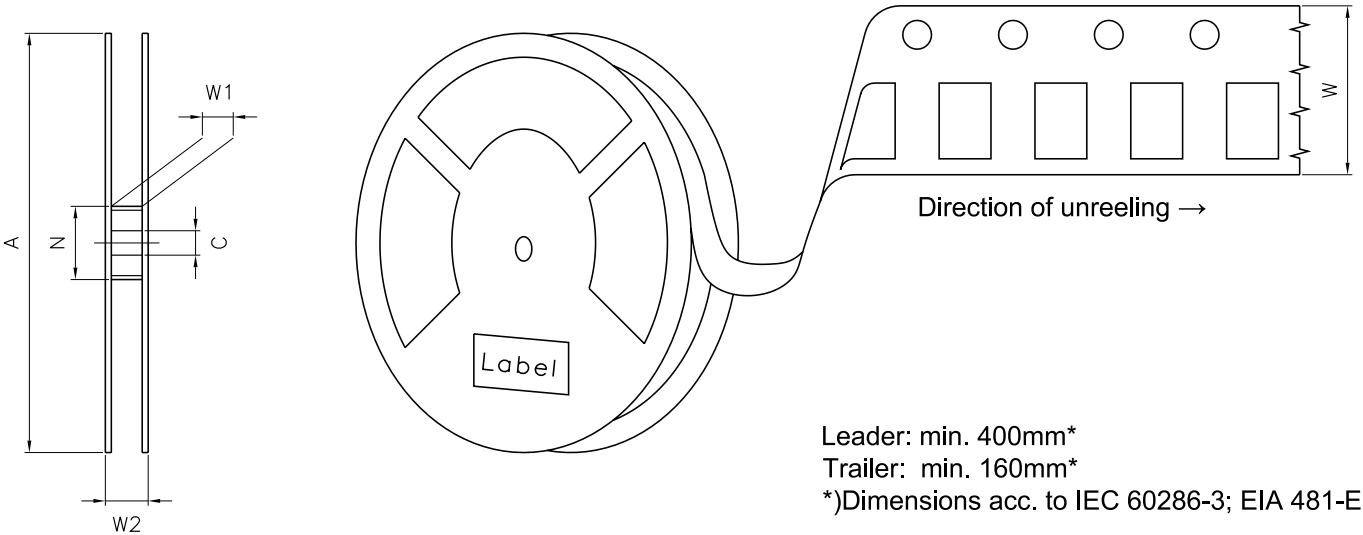

Reel Dimensions

| A | W | N _{min} | W ₁ | W _{2 max} | Pieces per PU |
|--------|---------------------|------------------|----------------|--------------------|---------------|
| 180 mm | 12 + 0.3 / - 0.1 mm | 60 mm | 12.4 + 2 mm | 18.4 mm | 500 |

Barcode-Product-Label (BPL)

OSRAM

Opto Semiconductors

Our Brand

LED ENGINE

(6P) Batch No: 1234567890

(1T) Lot No: 1234567890

(X) Prod No: 12345678

(9D) D/C : 1234

(Q) Qty: 9999

CoO: XX

ML

TEMP

ST

X

XXX°

X

LXX-XXXXX

XxxXxx

RoHS Compliant

BIN1: XXX-X-X-XXX

BIN2: XXX-X-X-XXX

BIN3: XX-X-X-XXX

BIN4: XXX-XXX-X-XXX


BIN5: X-XX-X-XXX


BIN6: X-XX-X-XXX

Pack: RXX

B_X123_12345.1234

001





17 | Version 1.9 | 2023-12-04

Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet fall into the class **moderate risk (exposure time 0.25 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

Tapes and reels are shipped in airtight bags in order to reduce the onset of silver tarnish. We recommend bags only be opened when ready to use emitters. Partially used reels or trays should be stored in airtight bags or in storage purged with nitrogen.

Based on very short life cycle times in chip technology this component is subject to frequent adaption to the latest chip technology.

Changes to the content of this datasheet may occur without further notification. JEDEC 46C constitutes the guideline of the change management for the device specified in this document.

For further application related information please visit <https://ams-osram.com/support/application-notes>

Disclaimer

Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on our website.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Product and functional safety devices/applications or medical devices/applications

Our components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

Our products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using our components in product safety devices/ applications or medical devices/applications, buyer and/or customer has to inform our local sales partner immediately and we and buyer and /or customer will analyze and coordinate the customer-specific request between us and buyer and/or customer.

Glossary

- 1) **Brightness:** Brightness groups are tested at a current pulse duration of 10 ms and a tolerance of $\pm 10\%$.
- 2) **Operating Conditions:** Operating conditions according DC-derating (Max. Permissible Forward Current)
- 3) **Reverse Operation:** Not designed for reverse operation. Continuous reverse operation can cause migration and damage of the device.
- 4) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 5) **Peak Wavelength:** Wavelengths are tested at a current pulse duration of 10 ms and a tolerance of ± 2 nm.
- 6) **Forward Voltage:** Forward voltages are tested at a current pulse duration of 10 ms and a tolerance of ± 0.1 V.
- 7) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 8) **Thermal Resistance:** $R_{th\ max}$ is based on statistic values (6σ) used for Derating.
- 9) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimensions are specified in mm.
- 10) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

Revision History

| Version | Date | Change |
|---------|------------|---|
| 1.8 | 2021-08-05 | New Layout |
| 1.9 | 2023-12-04 | New Layout Applications Dimensional Drawing |



EU RoHS and China RoHS compliant product

此产品符合欧盟 RoHS 指令的要求；
按照中国的相关法规和标准，
不含有毒有害物质或元素。

Published by ams-OSRAM AG

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

ams-osram.com

© All rights reserved

am

OSRAM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ams OSRAM:](#)

[LZ1-00R702-0000](#)