

OSRAM LB TTSD

Datasheet

Published by **ams-OSRAM AG**

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

ams-osram.com

© All rights reserved



TOPLED®

LB TTSD specified at 1.5mA

TOPLED, SMT LED with integrated reflector. With our great experience in SMT LED we are able to offer a high quality product for all kind of applications.



Applications

- Ambient Lighting
- Appliances & Tools
- Automotive Aftermarket

Features

- Package: white PLCC-2 package, colorless clear resin
- Chip technology: ThinGaN
- Typ. Radiation: 120° (Lambertian emitter)
- Color: $\lambda_{\text{dom}} = 471 \text{ nm}$ (● blue)
- Corrosion Robustness Class: 3B
- Qualifications: AEC-Q102 Qualified
- ESD: 2 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM)

Ordering Information

Type	Luminous Intensity ¹⁾ $I_F = 1.5\text{ mA}$ I_v	Ordering Code
LB TTSD-M2N2-25-S6Z6-1.5	22 ... 45 mcd	Q65113A4928

Maximum Ratings

Parameter	Symbol		Values
Operating Temperature	T_{op}	min.	-40 °C
		max.	110 °C
Storage Temperature	T_{stg}	min.	-40 °C
		max.	110 °C
Junction Temperature	T_j	max.	125 °C
Forward current	I_F	min.	0.25 mA
$T_s = 25\text{ °C}$		max.	30 mA
Surge current	I_{FS}	max.	200 mA
$t \leq 10\text{ }\mu\text{s}$; $D = 0.005$; $T_s = 25\text{ °C}$			
Reverse voltage ²⁾	V_R	max.	5 V
$T_s = 25\text{ °C}$			
ESD withstand voltage	V_{ESD}		2 kV
acc. to ANSI/ESDA/JEDEC JS-001 (HBM)			

Characteristics

$I_F = 1.5 \text{ mA}$; $T_S = 25 \text{ °C}$

Parameter	Symbol		Values
Peak Wavelength	λ_{peak}	typ.	470 nm
Dominant Wavelength ³⁾ $I_F = 1.5 \text{ mA}$	λ_{dom}	min.	460 nm
		typ.	471 nm
		max.	476 nm
Spectral Bandwidth at 50% $I_{\text{rel,max}}$	$\Delta\lambda$	typ.	20 nm
Viewing angle at 50% I_V	2ϕ	typ.	120 °
Forward Voltage ⁴⁾ $I_F = 1.5 \text{ mA}$	V_F	min.	2.40 V
		typ.	2.70 V
		max.	3.00 V
Reverse current ²⁾ $V_R = 5 \text{ V}$	I_R	typ.	0.01 μA
		max.	10 μA
Real thermal resistance junction/ambient ⁵⁾⁶⁾	$R_{\text{thJA real}}$	max.	340 K / W
Real thermal resistance junction/solderpoint ⁵⁾	$R_{\text{thJS real}}$	max.	180 K / W

Brightness Groups

Group	Luminous Intensity ¹⁾ $I_F = 1.5 \text{ mA}$ min. I_v	Luminous Intensity. ¹⁾ $I_F = 1.5 \text{ mA}$ max. I_v	Luminous Flux ⁷⁾ $I_F = 1.5 \text{ mA}$ typ. Φ_v
M2	22 mcd	28 mcd	70 mlm
N1	28 mcd	36 mcd	90 mlm
N2	36 mcd	45 mcd	120 mlm

Forward Voltage Groups

Group	Forward Voltage ⁴⁾ $I_F = 1.5 \text{ mA}$ min. V_F	Forward Voltage ⁴⁾ $I_F = 1.5 \text{ mA}$ max. V_F
S6	2.40 V	2.70 V
Z6	2.70 V	3.00 V

Wavelength Groups

Group	Dominant Wavelength ³⁾ $I_F = 1.5 \text{ mA}$ min. λ_{dom}	Dominant Wavelength ³⁾ $I_F = 1.5 \text{ mA}$ max. λ_{dom}
2	460 nm	464 nm
3	464 nm	468 nm
4	468 nm	472 nm
5	472 nm	476 nm


Group Name on Label

Example: M2-2-S6

Brightness	Wavelength	Forward Voltage
M2	2	S6


Relative Spectral Emission ⁷⁾

$$\Phi_{\text{rel}} = f(\lambda); I_F = 1.5 \text{ mA}; T_S = 25^\circ \text{C}$$

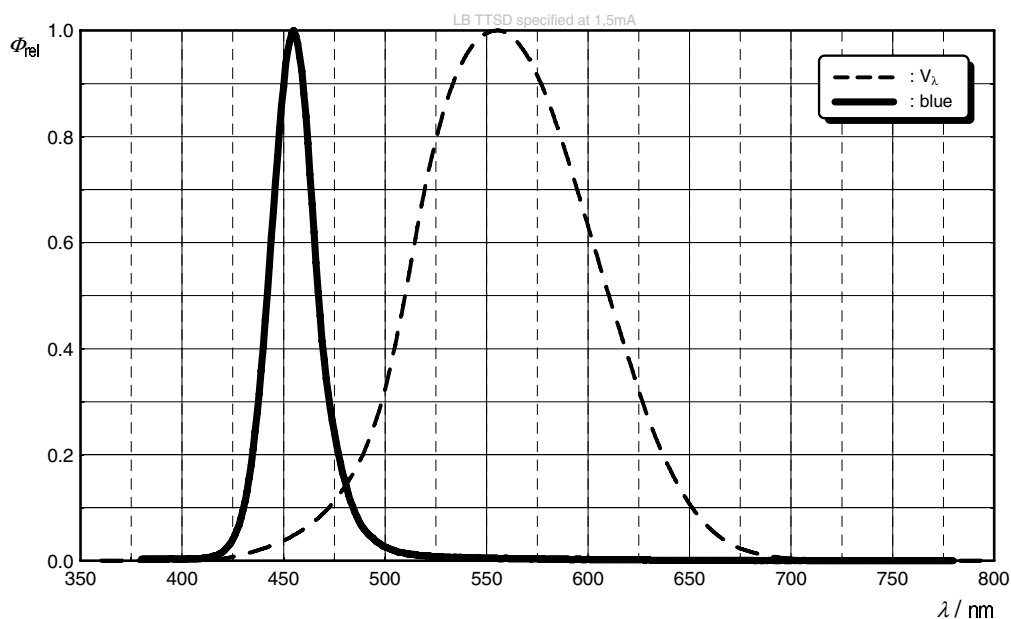


Radiation Characteristics ⁷⁾

$$I_{\text{rel}} = f(\phi); T_S = 25^\circ \text{C}$$

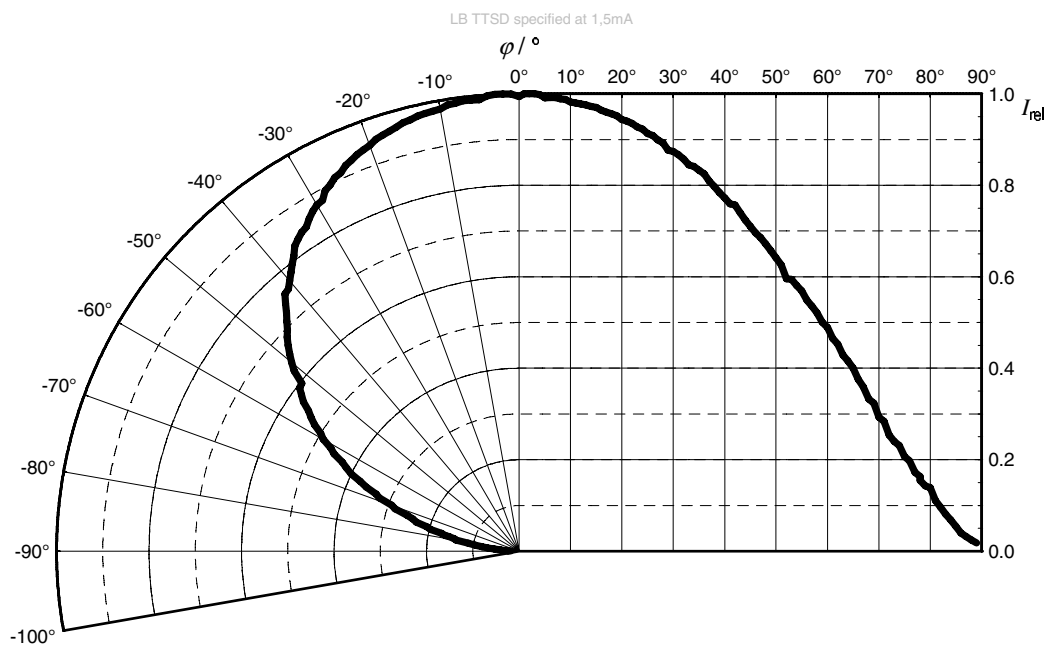


Forward current ⁷⁾

$$I_F = f(V_F); T_S = 25\text{ °C}$$

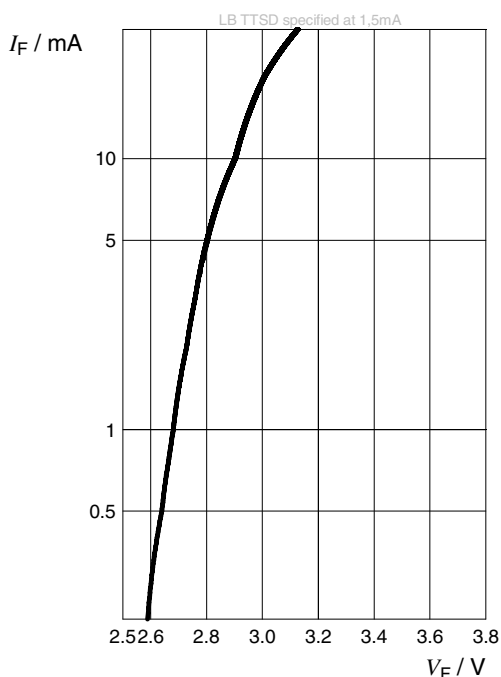


Relative Luminous Intensity ^{7), 8)}

$$I_V / I_V(1.5\text{ mA}) = f(I_F); T_S = 25\text{ °C}$$

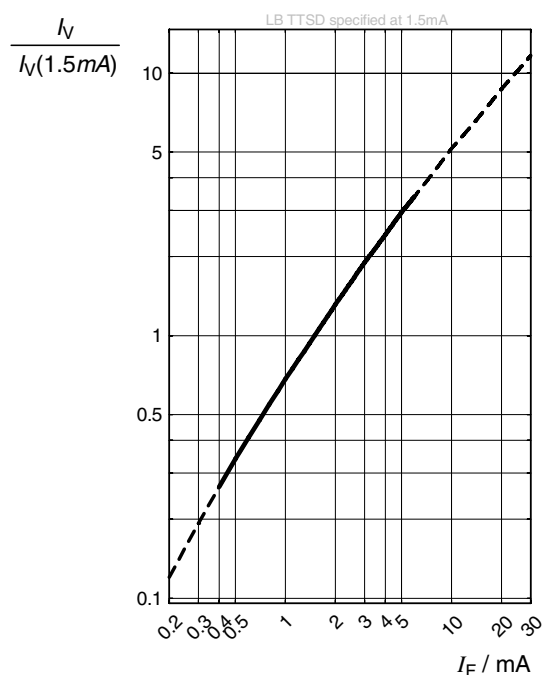


Dominant Wavelength ⁷⁾

$$\Delta\lambda_{\text{dom}} = f(I_F); T_S = 25\text{ °C}$$

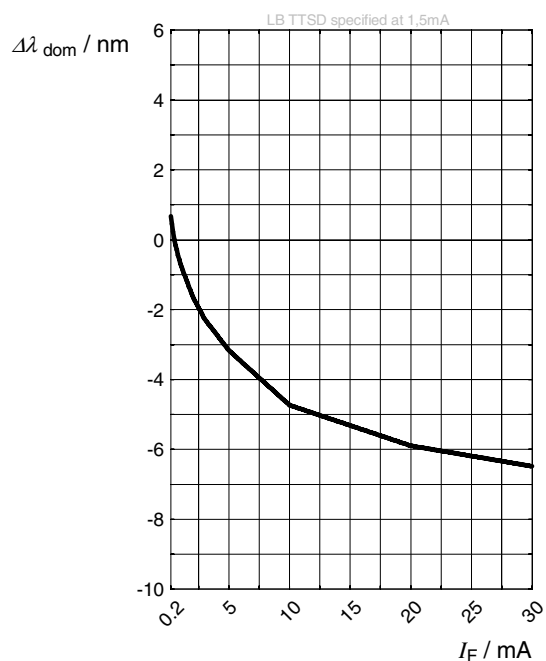


Forward Voltage ⁷⁾

$$\Delta V_F = V_F - V_F(25^\circ\text{C}) = f(T_j); I_F = 1.5 \text{ mA}$$

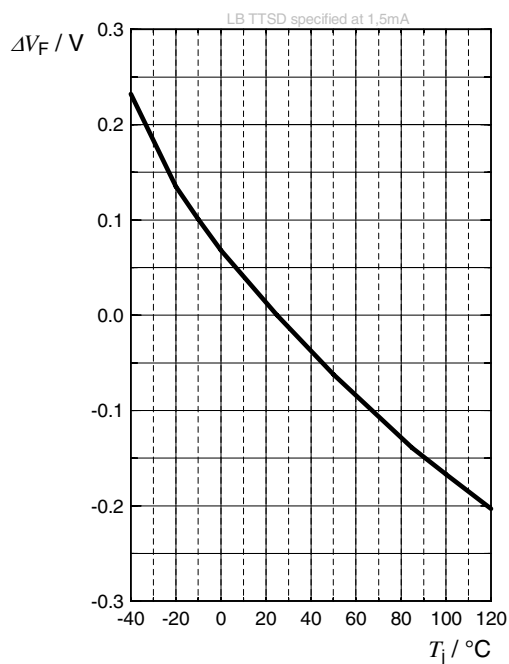


Relative Luminous Intensity ⁷⁾

$$I_V / I_V(25^\circ\text{C}) = f(T_j); I_F = 1.5 \text{ mA}$$

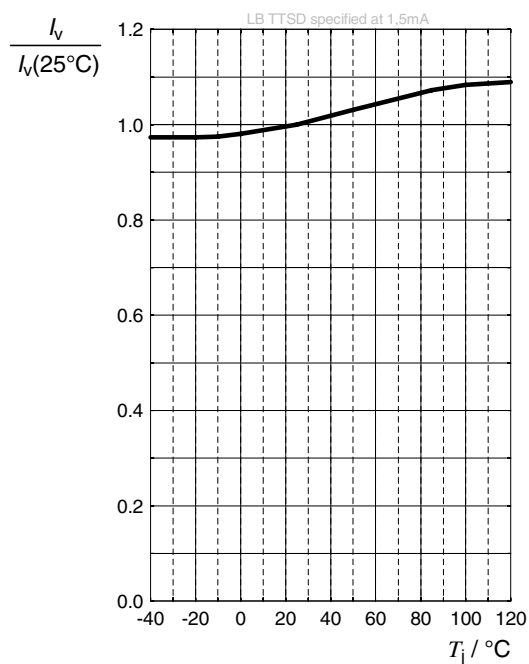


Dominant Wavelength ⁷⁾

$$\Delta \lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25^\circ\text{C}) = f(T_j); I_F = 1.5 \text{ mA}$$

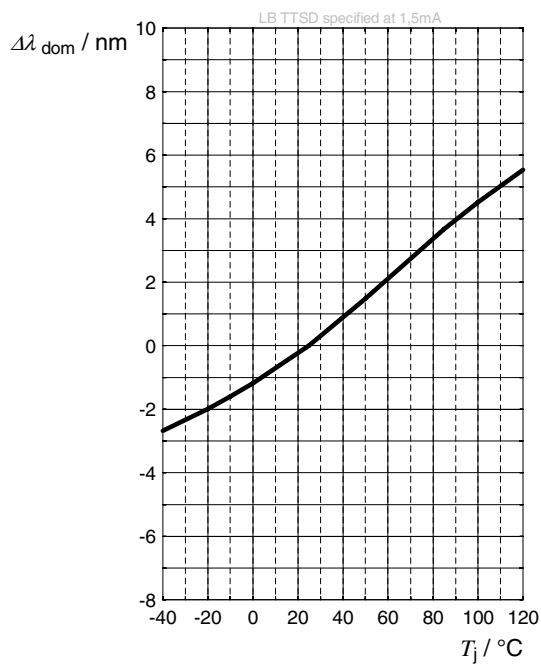


Max. Permissible Forward Current ⁵⁾

$I_F = f(T)$

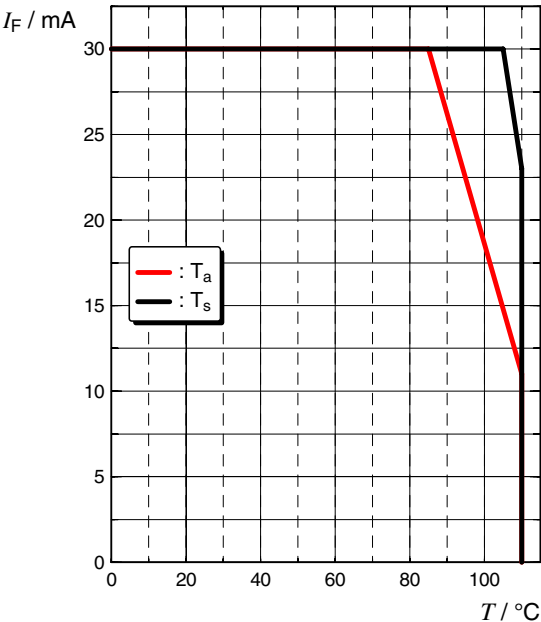


Permissible Pulse Handling Capability

$I_F = f(t_p)$; D: Duty cycle; $T_s = 25$ °C

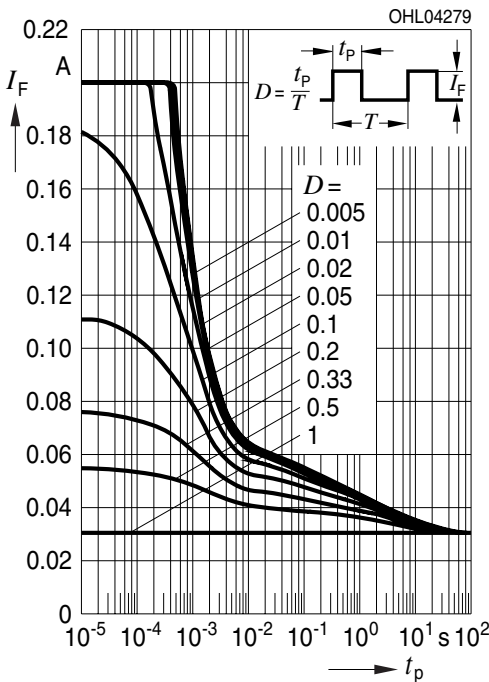


Permissible Pulse Handling Capability

$I_F = f(t_p)$; D: Duty cycle; $T_s = 85$ °C

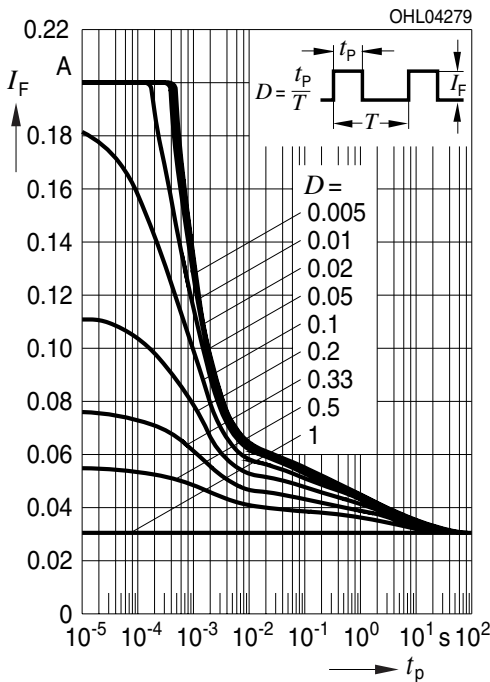

Dimensional Drawing ⁹⁾

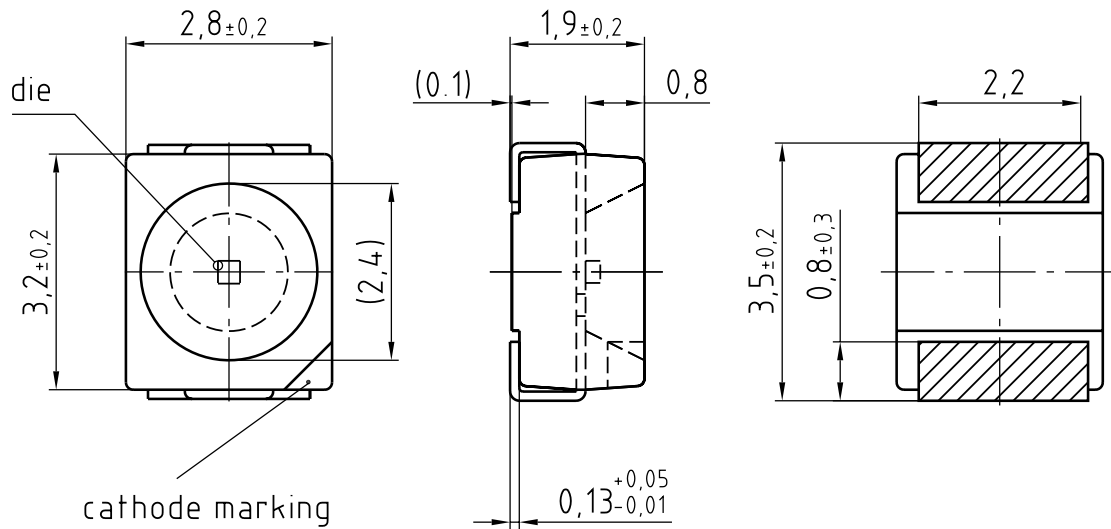

general tolerance $\pm 0,1$

lead finish Sn 


C63062-A3863-A4...-03

Further Information:


Approximate Weight: 32.0 mg

Corrosion test: Class: 3B
Test condition: 40°C / 90 % RH / 15 ppm H₂S / 14 days (stricter than IEC 60068-2-43)

Electrical Internal Circuit




Recommended Solder Pad ⁹⁾

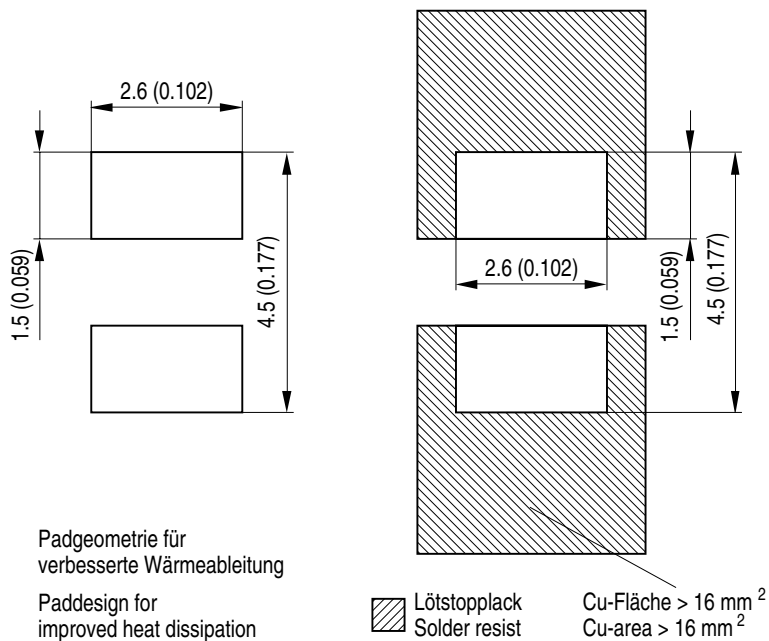

OHLPY970

Recommended Solder Pad ⁹⁾

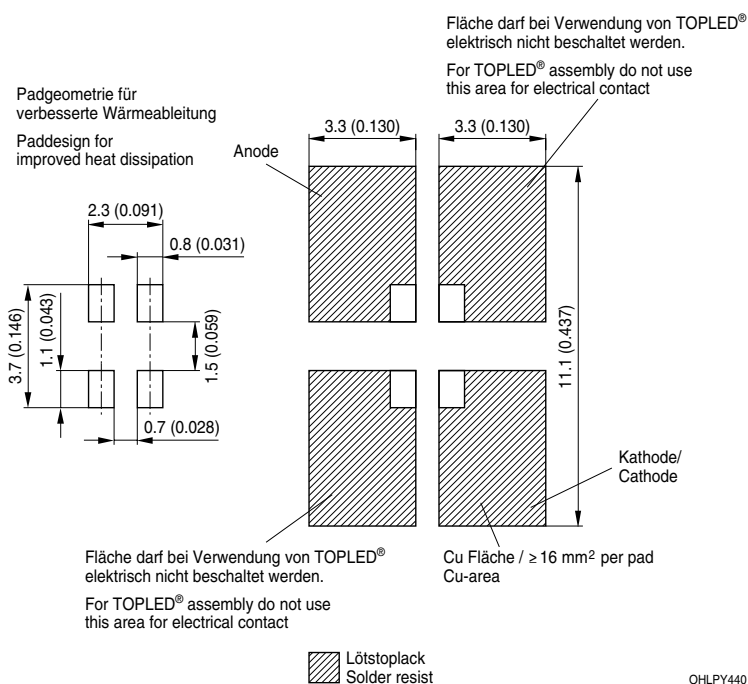


OHLPY440

For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere. Package not suitable for ultra sonic cleaning.

Reflow Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

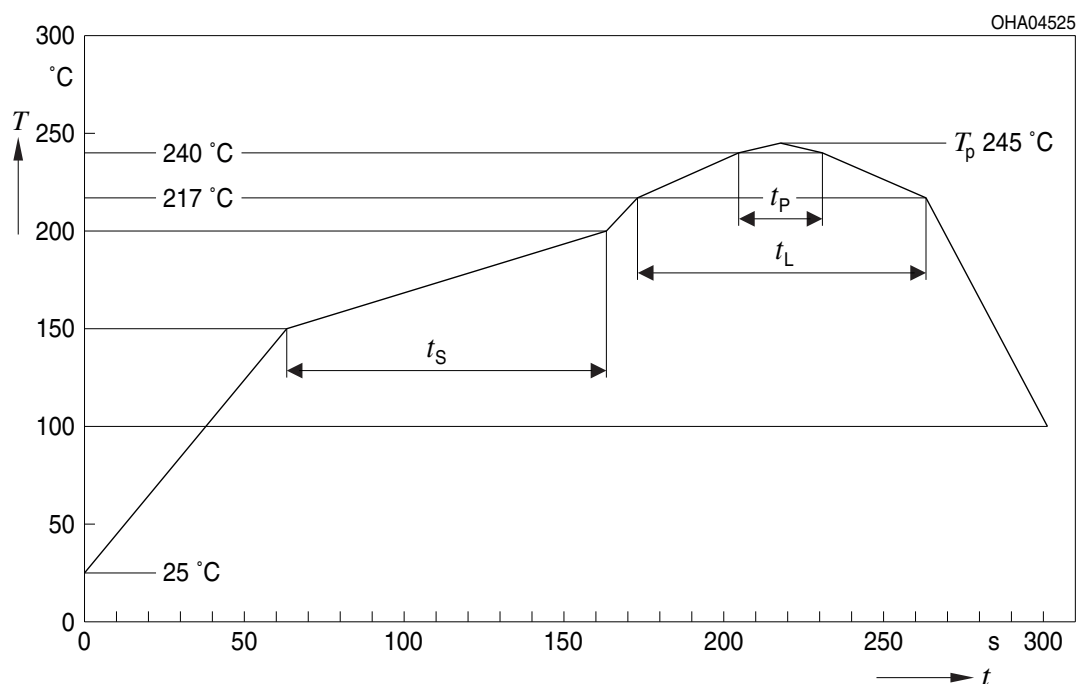


Profile Feature	Symbol	Pb-Free (SnAgCu) Assembly			Unit
		Minimum	Recommendation	Maximum	
Ramp-up rate to preheat ^{*)} 25 °C to 150 °C			2	3	K/s
Time t_s T_{Smin} to T_{Smax}	t_s	60	100	120	s
Ramp-up rate to peak ^{*)} T_{Smax} to T_p			2	3	K/s
Liquidus temperature	T_L		217		$^{\circ}\text{C}$
Time above liquidus temperature	t_L		80	100	s
Peak temperature	T_p		245	260	$^{\circ}\text{C}$
Time within 5 °C of the specified peak temperature $T_p - 5\text{ K}$	t_p	10	20	30	s
Ramp-down rate* T_p to 100 °C			3	6	K/s
Time 25 °C to T_p				480	s

All temperatures refer to the center of the package, measured on the top of the component

* slope calculation DT/Dt : Dt max. 5 s; fulfillment for the whole T-range

Taping ⁹⁾

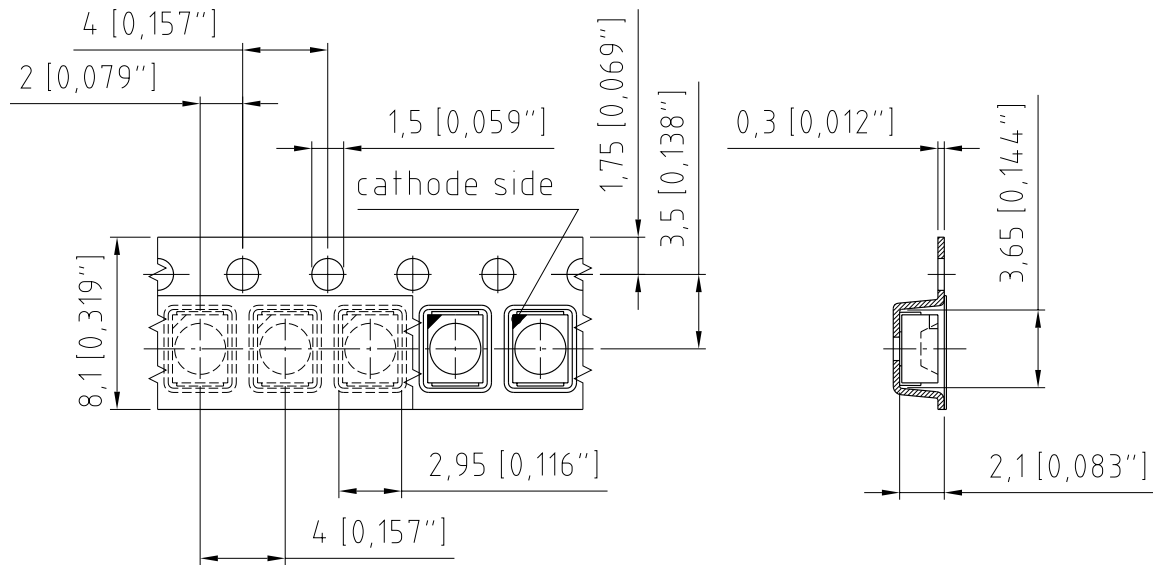

C63062-A3863-B3 -02

Tape and Reel ¹⁰⁾



Reel Dimensions

A	W	N _{min}	W ₁	W _{2 max}	Pieces per PU
180 mm	8 + 0.3 / - 0.1 mm	60 mm	8.4 + 2 mm	14.4 mm	2000

Barcode-Product-Label (BPL)

OSRAM

LX XXXX

BIN1: XX-XX-X-XXX-X

(6P) BATCH NO: 1234567890

(9D) D/C: 1234

RoHS Compliant

ML Temp

ST

X

XXX °C

X

Pack: RXX

DEMY

XXX

X_X123_1234.1234 X

(1T) LOT NO: 1234567890

(X) PROD NO: 123456789

(Q) QTY: 9999

(G) GROUP: XX-XX-X-X

OHA04563

Dry Packing Process and Materials ⁹⁾

The diagram illustrates the components used in the dry packing process for moisture-sensitive products. It shows a large moisture-sensitive bag with a barcode label, two small desiccant packets, and a circular humidity indicator card with a barcode label. Labels with leader lines identify each component: Moisture-sensitive label or print, Barcode label, Desiccant, Humidity indicator, and Barcode label.

OHA00539

Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.

18 | Version 1.2 | 2023-09-28

Type Designation System

Wavelength ($\lambda_{\text{dom typ.}}$)		Emission Color	Color coordinates according CIE 1931/Emission color:			
A:	617 nm	amber	W:	white		
S:	633 nm	super red	UW:	ultra white		
T:	528 nm	true green	CB:	color on demand blue		
Y:	587 nm	yellow	CG:	color on demand green		
O:	606 nm	orange	CL:	color on demand lagune		
G:	570 nm	green	Package Type T: TOPLED			
P:	560 nm	pure green				
R:	625 nm	red				
B:	470 nm	blue				
H:	645 nm	hyper-red				
V:	505 nm	verde green				
L: Light emitting diode						
L	A		T	6	7	6
Lead / Package Properties 6: folded leads 7: reverse gullwing leads T: folded leads, improved corrosion stability Au-LF), w/o TiO2 jetting V: folded leads and UX:3 w/ improved corrosion stability (Au-LF), TiO2 jetting						
Encapsulant Type / Lens Properties 7: Colorless clear or white volume conversion (resin encapsulation) S: Silicone (with or without diffuser)						
Chip Technology: 1: TSN 3: standard InGaN 4: AlGaAs 5: HOP 2000 6: Standard InGaIP 9: TSN low current B: HOP 2000 C: ATON D: Small ThinGaN/ Thinfilm (e.g. 6mil) F: Thinfilm InGaAIP G: ThinGaN(Thinfilm InGaN) K: InGaAIP low current S: standard InGaN low current O: TSN						

Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet fall into the class **exempt group (exposure time 10000 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials including silver. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers minimize device exposure to aggressive substances during storage, production, and use. Devices that showed visible discoloration when tested using the described tests above did show no performance deviations within failure limits during the stated test duration. Respective failure limits are described in the IEC60810.

For further application related information please visit <https://ams-osram.com/support/application-notes>

Disclaimer

Attention please!

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on our website.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Product and functional safety devices/applications or medical devices/applications

Our components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

Our products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using our components in product safety devices/ applications or medical devices/applications, buyer and/or customer has to inform our local sales partner immediately and we and buyer and /or customer will analyze and coordinate the customer-specific request between us and buyer and/or customer.

Glossary

- 1) **Brightness:** Brightness values are measured during a current pulse of typically 25 ms, with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (acc. to GUM with a coverage factor of $k = 3$).
- 2) **Reverse Operation:** This product is intended to be operated applying a forward current within the specified range. Applying any continuous reverse bias or forward bias below the voltage range of light emission shall be avoided because it may cause migration which can change the electro-optical characteristics or damage the LED.
- 3) **Wavelength:** The wavelength is measured at a current pulse of typically 25 ms, with an internal reproducibility of ± 0.5 nm and an expanded uncertainty of ± 1 nm (acc. to GUM with a coverage factor of $k = 3$).
- 4) **Forward Voltage:** The forward voltage is measured during a current pulse of typically 8 ms, with an internal reproducibility of ± 0.05 V and an expanded uncertainty of ± 0.1 V (acc. to GUM with a coverage factor of $k = 3$).
- 5) **Thermal Resistance:** $R_{th\ max}$ is based on statistic values (6σ) used for Derating.
- 6) **Thermal Resistance:** R_{thJA} results from mounting on PC board FR 4 (pad size 16 mm² per pad)
- 7) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 8) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 9) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with ± 0.1 and dimensions are specified in mm.
- 10) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

Revision History

Version	Date	Change
1.0	2022-11-17	Initial Version
1.1	2023-02-13	Ordering Information Brightness Groups
1.2	2023-09-28	Electro - Optical Characteristics (Diagrams)



EU RoHS and China RoHS compliant product

此产品符合欧盟 RoHS 指令的要求；
按照中国的相关法规和标准，
不含有毒有害物质或元素。

Published by ams-OSRAM AG

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

ams-osram.com

© All rights reserved

am

OSRAM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ams OSRAM:](#)

[LB TTSD-M2N2-25-S6Z6-1.5](#)