# **BGA Heat Sink (High Aspect Ratio Ext.) Standard Pin Fin**





ATS Part#: ATS043045009-PF031

Description: 44.50 x 43.20 x 8.90 mm BGA Heat Sink (High Aspect Ratio Ext.) Standard Pin Fin

Heat Sink Type: Standard Pin Fin

Heat Sink Attachment: N/A
Equivalent Part Number: N/A

\*Image above is for illustration purpose only.


#### **Features & Benefits**

- Excellent balance of low cost and high performance in an aluminum heat sink.
- Designed for semiconductor devices with omni-directional airflow requirements.
- 11 x 10 pin array
- Available with a variety of thermal adhesive tape options. Contact sales@qats.com for product configurations.

### **Thermal Performance**

| AIR VELOCITY       |               | @200 LFM<br>1.0 M/S | @300 LFM<br>1.5 M/S | @400 LFM<br>2.0 M/S | @500 LFM<br>2.5 M/S | @600 LFM<br>3.0 M/S | @700 LFM<br>3.5 M/S | @800 LFM<br>4.0 M/S |
|--------------------|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| THERMAL RESISTANCE | Unducted Flow | 8.4 °C/W            | N/A °C/W            |
|                    | Ducted Flow   | 0                   | N/A                 | N/A                 | N/A                 | N/A                 | N/A                 | N/A                 |

#### **Product Detail**

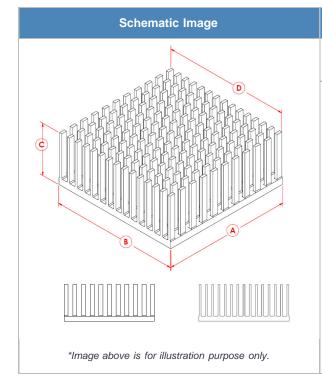

| Dimension A | Dimension B | Dimension C | Dimension D | TIM    | Finish         |
|-------------|-------------|-------------|-------------|--------|----------------|
| 44.50 mm    | 43.20 mm    | 8.90 mm     | N/A mm      | NO TIM | Black Anodized |

#### Notes:

- Dimension A and B refer to component size.
- Dimension C is the heat sink height from the bottom of the base to the top of the fin field.
- Thermal performance data are provided for reference only. Actual performance may vary by application
- ATS reserves the right to update or change its products without notice to improve the design or performance.
- ATS certifies that this heat sink assembly is RoHS-6 and REACH compliant.
- Contact ATS to learn about custom options available.

ATS ADVANCED THERMAL SOLUTIONS, INC.
Innovations in Thermal Management®

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Thermal Solutions:

ATS043045009-PF031