


# pcbCLIP™ - Tape-on PCB Attachment System




**ATS Part#:** **ATS-64190 Series** (See specific Part #'s below)  
**Description:** 25.00 x 18.25 DSP Heat Sink in heights of 12.5 mm, 17.5 mm, and 22.0 mm [see PN#'s below]  
**Max. Component Size:** 10.00 x 10.00 x 1.4 mm (minimum height of 1 mm)  
**Heat Sink Type:** Straight Fin  
**Heat Sink Attachment:** Plastic Frame Clip and Stainless Steel Spring Clip  
**Equivalent Part Number:** N/A

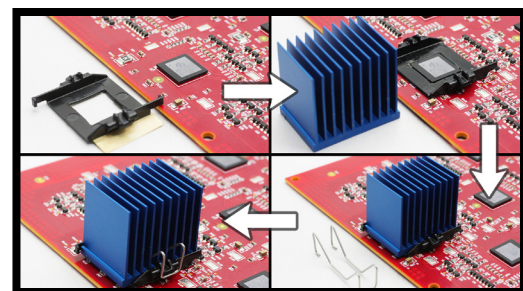

## Features & Benefits

- » High aspect ratio straight fin heat sink provides enhanced thermal performance to smaller BGA packages.
- » Frame clip is attached to the PCB with 3M double-sided tape and no holes are required on the PCB.
- » Stainless steel spring clip applies steady, even pressure to the component and secures the heat sink.
- » Frame clip (ATS-HK361-R2) is made of PC-ABS plastic blend, providing flame retardant performance.
- » Tape on frame clip assembly kit is supplied with brown release liner. Release liner must be removed prior to installation onto PCB.
- » Heat sink Thermal Interface Material (TIM) is pre-assembled and centered on base.


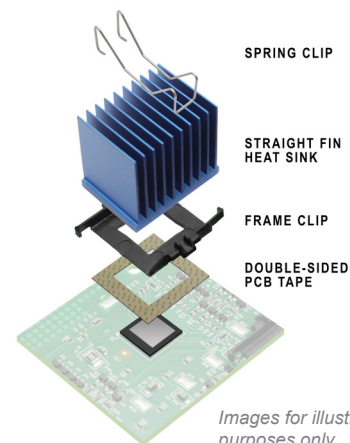


Images for illustration purposes only.

Heat Sink Part Number	L (mm)	W (mm)	H (mm)	Thermal Resistance (°C/W) at 1.0 m/s (200 LFM)	Heat Sink Material
ATS-64190G-C1-R0	25	18.25	12.5	9.53	Aluminum
ATS-64190P-C1-R0	25	18.25	17.5	6.67	Aluminum
ATS-64190T-C1-R0	25	18.25	22	5.42	Aluminum

## Product Details



SCHEMATIC IMAGE	Dimension A	Dimension B	Dimension C	Dimension D	Dimension E	TIM	Finish
	25 mm	18.25 mm	See height chart above	27.40 mm	26.61 mm	Chomerics T766	Blue

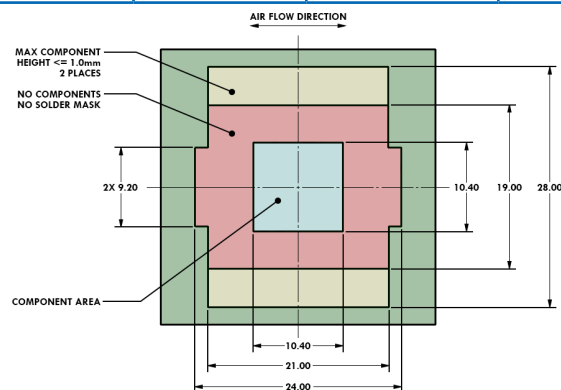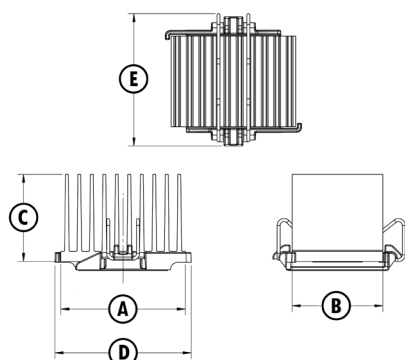


### NOTES:

- 1) Dimensions A and B refer to heat sink size.
- 2) Dimension C is the heat sink height from the bottom of the base to the top of the fin field.
- 3) Dimensions D and E refer to the dimensions of the frame clip
- 4) Thermal performance data are provided for reference only. Actual performance may vary by application.
- 5) ATS reserves the right to update or change its products without notice to improve the design or performance.
- 6) ATS certifies that this heat sink assembly is RoHS-6 and REACH compliant.
- 7) Contact ATS to learn about custom options available.


# pcbCLIP™ INSTALLATION GUIDE

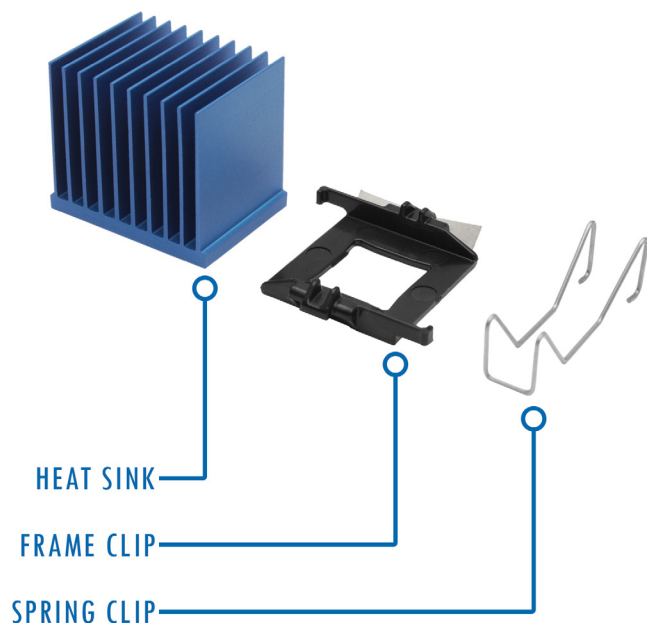


1  
Clean application area on PCB with isopropyl alcohol and let dry before installation.




2  
Remove the liner of the adhesive tape on the bottom of the Frame Clip.




3  
Position the Frame Clip around the component. (Note the direction of air flow when positioning the Frame Clip).




4  
Apply steady pressure to the Frame Clip to secure it to the PCB.




5  
Place the Heat Sink squarely into the frame clip over the component.



6  
Secure the "Open End" of the Spring Clip under the lip of the frame clip.



7  
Press the "Closed End" of the Spring Clip on to the Frame Clip tab.



8  
Inspect the installation. Double check to make sure the Heat Sink is securely attached.

**Advanced Thermal Solutions, Inc.** is a leading engineering and manufacturing company supplying complete thermal and mechanical packaging solutions from analysis and testing to final production. ATS provides a wide range of air and liquid cooling solutions, laboratory-quality thermal instrumentation, along with thermal design consulting services and training. For more information about Advanced Thermal Solutions, Inc., please visit [www.qats.com](http://www.qats.com) or call 781.769.2800.



**ATS** ADVANCED  
THERMAL  
SOLUTIONS, INC.  
Innovation in Thermal Management®

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Advanced Thermal Solutions:](#)

[ATS-64190G-C1-R0](#) [ATS-64190P-C1-R0](#) [ATS-64190T-C1-R0](#)