# Air to Air Thermoelectric Assembly

## ATS PART# ATS-FF-150W-24-C

ATS' air to air thermoelectric assemblies are heat exchangers that remove heat from an enclosure and are designed for temperature regulation of small electronic cabinets or enclosures. They are often used when it is better to circulate cooled air rather than use direct contact with a cold plate.



- » Compact and lightweight
- » Can be mounted in any orientation » Air to air heat exchanger
- » No compressor
- » Virtually maintenance free
- » Simple quick installation
- » Quiet operation
- » Uses thermoelectrics

### **SPECIFICATION**

Max Cooling power 90W @  $\Delta T = 0^{\circ}C$ 


TEC Voltage 24 VDC

Start 9.5 A / Working 8.2 A **TEC Current** 


Fan Voltage 24 VDC

#### **APPLICATIONS**

- » Enclosure or cabinet cooling
- » Electronics cooling
- » Medical, surgical and biological process
- » Thermal management
- » Medical equipment
- » Refrigerators and water coolers
- » Industrial storage and food transportation








#### **Product Detail**

| Max Cooling<br>Power |     | TEC<br>Current | Hot Side<br>Fan             | Cold Side<br>Fan            | Operating<br>Temperature | Dimensions<br>(mm) | Mounting<br>Holes (mm) | Weight |
|----------------------|-----|----------------|-----------------------------|-----------------------------|--------------------------|--------------------|------------------------|--------|
| 90W                  | 24V | 8.2A           | 120x120x38 mm<br>24V, 0.25A | 120x120x38 mm<br>24V, 0.25A | -10° – 70°               | 300x160x170.1      | 200x145                | 4.5Kgs |

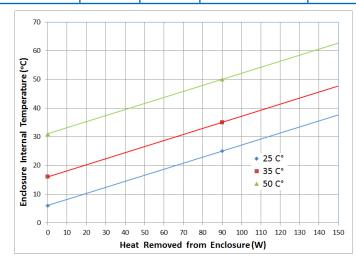

#### **NOTES:**

- Please use the 24 VDC power supply with the ripple less than 10%
- Please do not drop, otherwise TECs can get damaged.
- Please keep 10 cm distance from walls for proper ventilation when mounting. 3
- 4. Please do not use when the temperature of the assembly or environment is higher than
- Graph shows an example of when cabinet temperature is 50°C and the environment temp is 50°C, the cooler can transfer 90W from the cabinet to the ambient.
- $\Delta T = T_{enclosure} T_{ambient}$



## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Thermal Solutions:

ATS-FF-150W-24-C