Air to Air Thermoelectric Assembly

» Simple quick installation

» Air to air heat exchanger

» Uses thermoelectrics

» Quiet operation

ATS PART# ATS-WFF-60W-12-C

ATS' air to air thermoelectric assemblies are heat exchangers that remove heat from an enclosure and are designed for temperature regulation of small electronic cabinets or enclosures. They are often used when it is better to circulate cooled air rather than use direct contact with a cold plate.

FEATURES & BENEFITS

- » Compact and lightweight
- » Can be mounted in any orientation
- » No compressor
- » Virtually maintenance free


SPECIFICATION


Max Cooling power	
TEC Voltage	
TEC Current	
Fan Voltage	


28W @ ∆T = 0°C 12 VDC 7.3A 12 VDC

APPLICATIONS

- » Enclosure or cabinet cooling
- » Electronics cooling
- » Medical, surgical and biological process cooling
- » Thermal management
- » Medical equipment
- » Refrigerators and water coolers
- » Industrial storage and food transportation

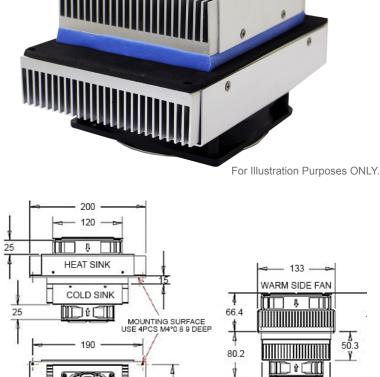






ALL DIMENSIONS ARE IN MM


	Produ	uct Detail					
Max Coolir Power	ig TEC Voltage	TEC Current	Hot Side Fan	Cold Side Fan	Operational Temperature	Dimensions (mm)	Weight
28W	12V	7.3A	120x120x25 mm 12V, 0.3A	92x92x25 mm 12V, 0.2A	-10° – 70°	200x133x146.6	2.6 Kgs

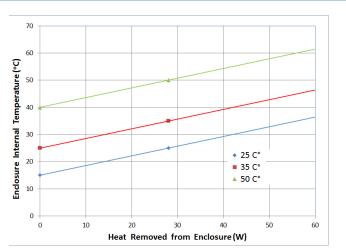

NOTES:

- 1. Please use 12 VDC power supply with the ripple less than 10%
- 2. Please do not drop, or the TEC can get damaged.
- 3. Please keep 10cm distance from walls for proper ventilation when mounting.
- Please do not use it when temperature of the assembly or environment is higher than 4. 70°C
- The graph is an example of when cabinet temperature is 50°C and the ambient temp 5 is 50°C, the cooler can transfer 28W heat from the cabinet to outside.
- 6. $\Delta T = T_{enclosure} - T_{ambient}$





Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Thermal Solutions: ATS-WFF-60W-12-C