



VRM/VRD Power Inductors – MVR



Part number ¹	L ² ±20% (µH)	DCR ±8% (mOhm)	SRF ³ typ (MHz)	Isat ⁴ (A)	Irms ⁵ (A)	Height max (mm)
Low core loss						
MVR1251T-251ML_	0.25	0.925	160	35	25	5.1
MVR1251T-361ML_	0.36	0.925	140	24	24	5.1
MVR1251T-561ML_	0.56	0.925	110	13	25	5.1
Soft saturation						
MVR1247C-361ML_	0.36	0.925	120	36	24	4.7
MVR1255C-651ML_	0.65	1.50	115	24	19	5.5
MVR1261C-112ML_	1.10	1.95	95	20	20	6.1
MVR1271C-162ML_	1.65	2.53	55	17	20	7.1
MVR1278C-232ML_	2.30	3.08	50	16	17	7.8

1. When ordering, please specify **termination** and **packaging** codes:

MVR1278C-232MLC

Termination: L = RoHS compliant tin-silver over copper.

Special order: T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape. Quantities less than full reel available: in tape (not machine ready) or with leader and trailer (\$25 charge).

B = Less than full reel. In an effort to simplify our part numbering system, Coilcraft is eliminating the need for multiple packaging codes. When ordering, simply change the last letter of your part number from B to C.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked.

2. Inductance measured at 500 kHz, 0.1 Vrms, 0 Adc using a Coilcraft SMD-A fixture in an Agilent/HP 4284A LCR meter or equivalent.

3. SRF measured on an Agilent/HP 8753ES.

4. DC current at which the inductance drops 30% (typ) for MVR12xxC and 20% (typ) for MVR12xxT from its value without current.

5. Current that causes a 40°C temperature rise from 25°C ambient.

6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

The MVR series provides greater current handling capability than any other power inductor its size. While requiring only one square centimeter of board space, this inductor can handle up to 36 Amps of current.

These shielded inductors were developed for multi-phase voltage regulators and are ideal for use in DC-DC converters, battery-powered devices and high current power supplies. Their flat wire construction ensures very low DC resistance and offers an excellent performance-to-height ratio. The materials used in these parts eliminate all thermal aging issues.

The MVR12xxT is a high efficiency part that features very low core loss. The MVR12xxC provides soft saturation and is unaffected by part temperature up to 125°C.

Refer to the comparison curves for L vs Current and ESR vs Frequency for performance differences.

For free evaluation samples, contact Coilcraft or order them online at www.coilcraft.com.

Core material MVRxxxT: Ferrite; MVRxxxxC: Powdered iron

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant tin-silver over copper. Other terminations available at additional cost.

Weight MVRT: 2.1 g; MVRC: 2.45 – 3.86 g

Ambient temperature –40°C to +85°C with Irms current, +85°C to +125°C with derated current

Max part temperature +125°C

Storage temperature Component: –40°C to +125°C.

Tape and reel packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging

MVR1247 200/7" reel; 900/13" reel

MVR1251 175/7" reel; 700/13" reel

MVR1255 175/7" reel; 700/13" reel

MVR1261 175/7" reel; 700/13" reel

MVR1271 100/7" reel; 500/13" reel

MVR1278 100/7" reel; 500/13" reel

Plastic tape: 24 mm wide, 16 mm pocket spacing

MVR1247 0.35 mm thick, 4.5 mm pocket depth

MVR1251 0.4 mm thick, 6.1 mm pocket depth

MVR1255 0.4 mm thick, 6.1 mm pocket depth

MVR1261 0.4 mm thick, 6.1 mm pocket depth

MVR1271 0.4 mm thick, 7.5 mm pocket depth

MVR1278 0.4 mm thick, 7.5 mm pocket depth

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See [Doc787_PCB_Washing.pdf](#).



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com

UK +44-1236-730595 sales@coilcraft-europe.com

Taiwan +886-2-2264 3646 sales@coilcraft.com.tw

China +86-21-6218 8074 sales@coilcraft.com.cn

Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 420-1 Revised 07/22/25


© Coilcraft Inc. 2025

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.




MVR Series – VRM/VRD Power Inductors


Current Derating

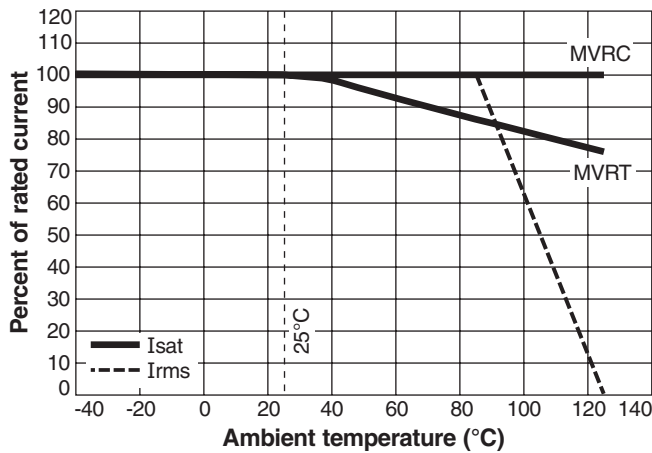



Temperature Rise vs Current

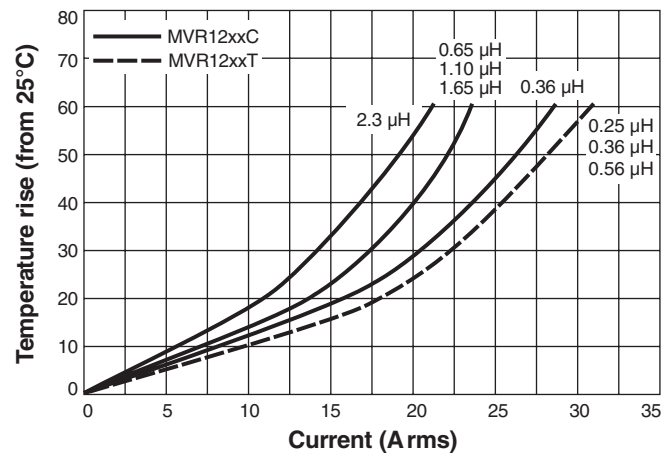

L vs Current Comparison – 0.36 µH

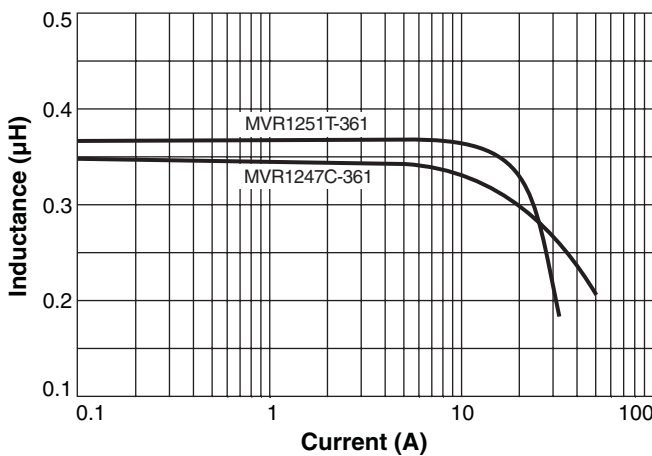

ESR vs Frequency Comparison – 0.36 µH

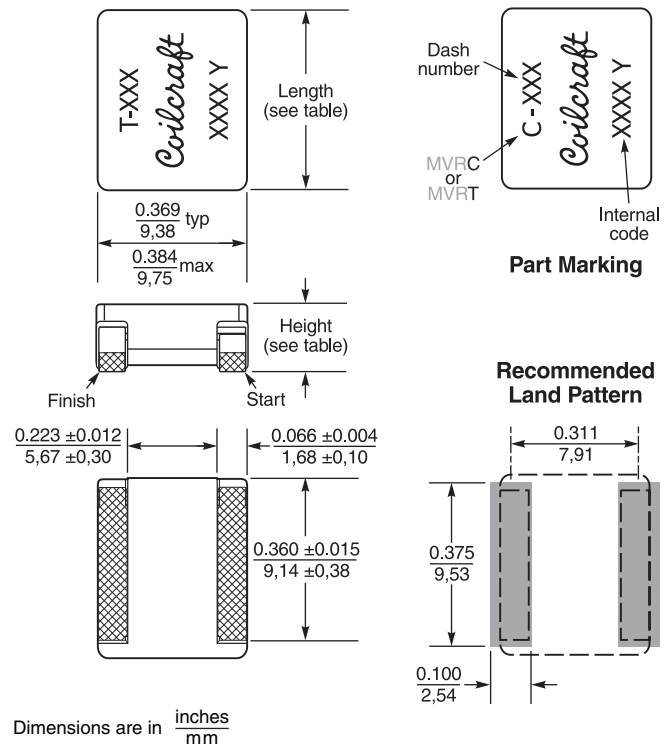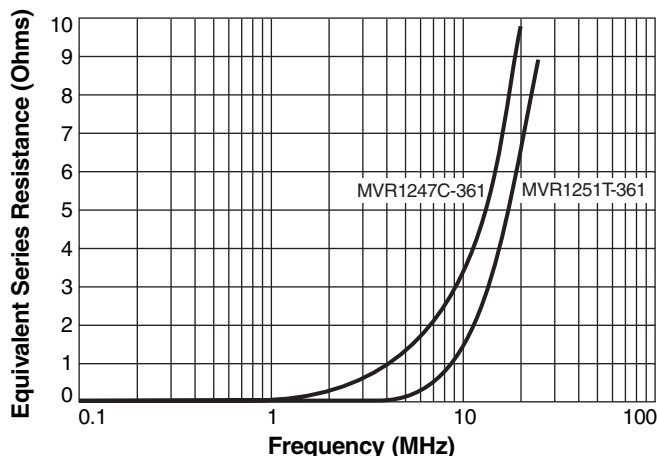

Dimensions are in $\frac{\text{inches}}{\text{mm}}$


Body size	Height (in. / mm) typ max	Length (in. / mm) typ max
MVR1247	0.171 / 4,35 0.185 / 4,70	0.448 / 11,37 0.453 / 11,50
MVR1251	0.181 / 4,61 0.200 / 5,10	0.439 / 11,14 0.453 / 11,50
MVR1255	0.207 / 5,25 0.217 / 5,50	0.448 / 11,37 0.453 / 11,50
MVR1261	0.232 / 5,90 0.240 / 6,10	0.448 / 11,37 0.453 / 11,50
MVR1271	0.262 / 6,65 0.280 / 7,10	0.448 / 11,37 0.453 / 11,50
MVR1278	0.287 / 7,29 0.307 / 7,80	0.448 / 11,37 0.453 / 11,50




MVR Series – VRM/VRD Power Inductors

MVR12xxT


L vs Frequency

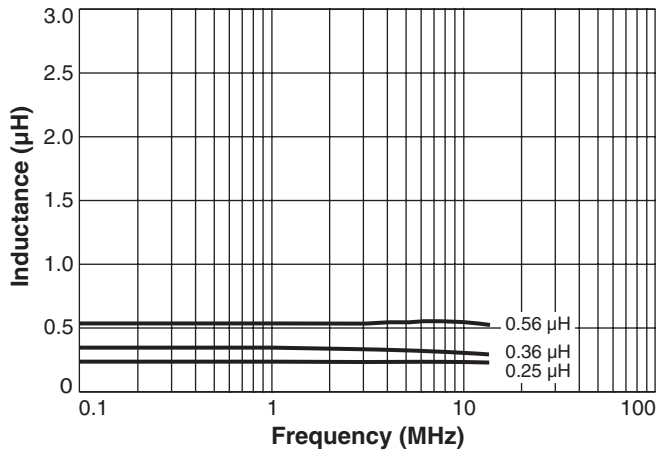

L vs Current

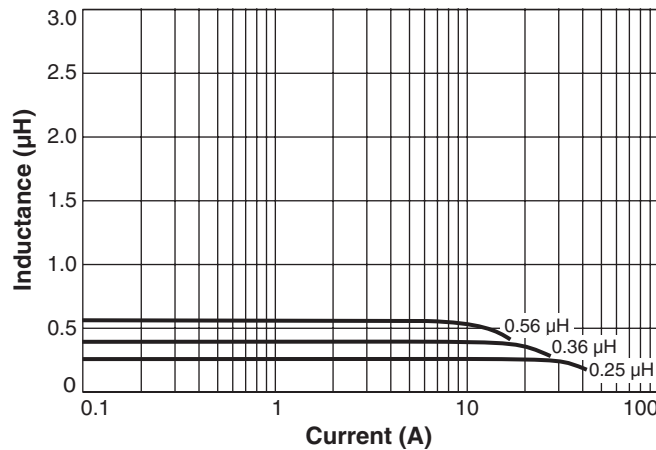


ESR vs Frequency

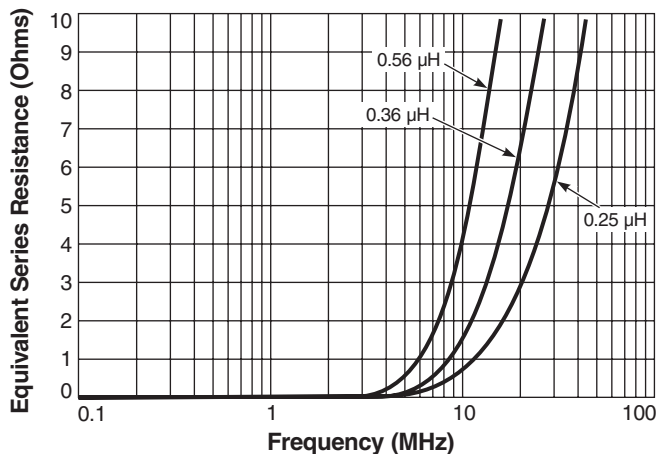


MVR12xxC

L vs Frequency

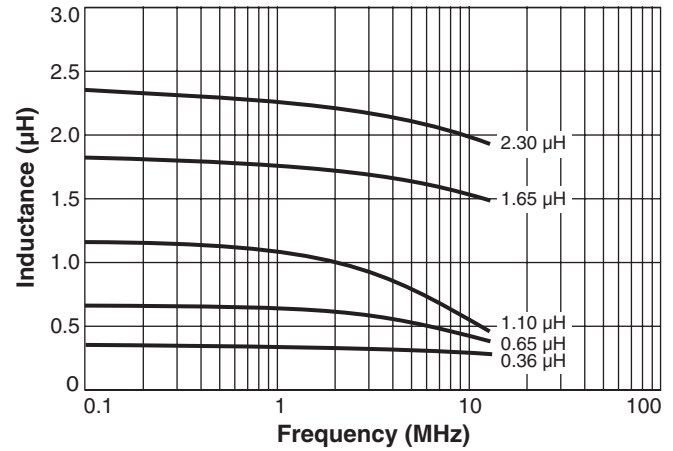


L vs Current

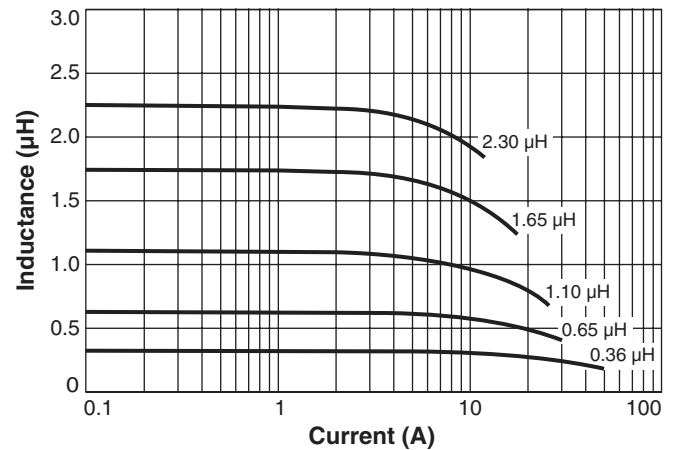

Inductance vs current is unaffected by part temperature up to 125°C.

ESR vs Frequency

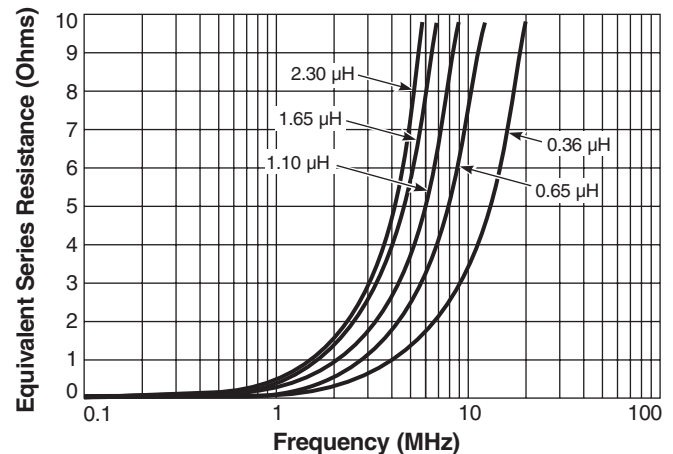

www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 420-3 Revised 07/22/25

© Coilcraft Inc. 2025

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Coilcraft:](#)

[MVR1271C-162MLB](#) [MVR1251T-561MLB](#) [MVR1247C-361MLC](#) [MVR1251T-251MLC](#) [MVR1255C-651MLB](#)
[MVR1251T-361MLB](#) [MVR1247C-361MLB](#) [MVR1261C-112MLC](#) [MVR1251T-361MLC](#) [MVR1261C-112MLB](#)
[MVR1278C-232MLB](#) [MVR1255C-651MLC](#) [MVR1278C-232MLC](#) [MVR1251T-251MLB](#) [MVR1251T-561MLC](#)
[MVR1271C-162MLC](#)