

LCS Series

Subminiature Sealed Snap-acting Switches



Features/Benefits

- Compact design
- Long life and high electrical capacity
- Quick connect, solder terminals, PC terminals, wire leads
- Wide variety of actuator styles
- RoHS compatible, RoHS compliant
- IP67

Typical Applications

- Motorized equipment
- Sump pump
- Thermostatic controls
- Computers
- Air conditioners



Specifications

CONTACT RATING: 6 AMP, 250 V AC and
5 AMP, 125/250 V AC 
0.1 AMP, 125/250 V AC

ELECTRICAL LIFE: 10,000 cycles

INSULATION RESISTANCE: 100 M ohm min.

DIELECTRIC STRENGTH: 1,000 VAC

OPERATING TEMPERATURE:

-40°C to +120°C (without wire)

-40°C to +85°C (with UL1007 wire)

-40°C to +105°C (with UL1015 wire)

-40°C to +105°C (with UL1430 wire)

-40°C to +80°C (with UL1061 wire)

-40°C to +120°C (with UL1330 wire)

OPERATING FORCE: (see ACTUATOR'S option sections).

MOUNTING: 2-56 screws, torque 2.3 in/lbs max.

NOTE: Specifications and materials listed above are for switches with standard options.
For information on specific and custom switches, consult Customer Service center.

Materials

SWITCH HOUSING: Thermoplastic polyester or high temperature thermoplastic (PTS) (UL 94V-0).

ACTUATOR BUTTON: Thermoplastic polyester.

SPRING: Copper alloy.

PIVOT: Copper alloy.

MOVABLE CONTACTS: Silver nickel

STATIONARY CONTACTS: Silver nickel on copper alloy.

TERMINALS: Copper alloy.

ACTUATOR LEVEL: Stainless steel.

Build-A-Switch


To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages J-27 thru J-29. For additional options not shown in catalog, consult Customer Service Center.

Series LCS		Contact Rating 05 5 AMP, 125/250 V AC  01 0.1 AMP, 125/250 V AC 		Operating Force 1 150 grams 2 203 grams		Actuator P00 Pin plunger T00 11.9 mm short lever T05 17.4 mm short lever T07 19.4 mm short lever T13 25.5 mm lever T19 33.3 mm lever T28 40.7 mm lever T43 55.9 mm lever S26 18.6 mm simulated lever A05 17.2 mm lever roller		Terminations S Solder Q 0.110 Quick Connect P PC Thru Hole W Wire leads potted Z Wire leads non-potted		Wire Type AWG 20 20 AWG 22 22 AWG 24 24 AWG 26 26 AWG 28 28 AWG 30 30 AWG		Wire UL # (when required) A UL1007 B UL1015 C UL1430 D UL1061 E UL1330		Circuitry C SPDT W SPST N.C. Y SPST N.O.	
Wire Side (when required) A Wire out the bottom B Wire out the right side C Wire out the left side D None															



Dimensions are shown: mm
Specifications and dimensions subject to change

SERIES

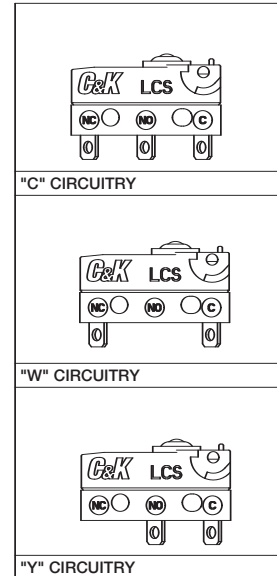[illegible]

ELECTRICAL RATING

RoHS COMPLIANT *	RoHS COMPATIBLE *	OPTION CODE	ELECTRICAL RATING
YES	YES	05	5 AMP, 125/250 V AC 6 AMP, 250 V AC
YES	YES	01	0.1 AMP, 125/250 V AC

OPERATING FORCE

OPTION CODE	OPERATING FORCES (grams)
1	150 g. max.
2	203 g. max.




www.ck-components.com


LCS Series
Subminiature Sealed Snap-acting Switches

ACTUATOR 


P00




T19




T07




A05




T00




T28




T13








S26



T05



T43

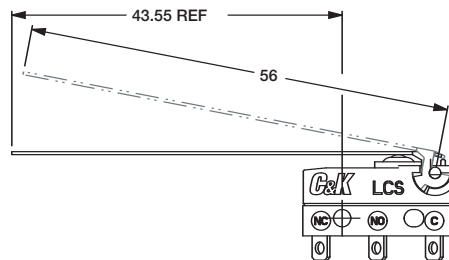

ACTUATOR OPTION CODE	A	B	C	D	E	DIFFERENTIAL MOTION (MAX)		OPERATING FORCE (MIN)		RELEASE FORCE (MIN)	
	LENGTH OF LEVER	OVER TRAVEL (MIN)	PRE TRAVEL (MAX)	OPERATING POSITION	FREE POSITION (MAX)	150	203	150	203	150	203
P00	N/A	0.6	1.2	8.4 ± 3	9.9	0.2	0.2	150	203	30	50
T00	11.9	0.6	3.2	8.8 ± 9	11.1	0.5	0.5	66	98	10	21
T05	17.40	0.9	4.3	8.8 ± 1.1	12	0.6	0.6	73	82	14	16
T07	19.40	1	4.8	8.8 ± 1.2	12.4	0.7	0.7	55	66	11	13
T13	25.5	1.6	6.3	8.8 ± 1.6	13.5	0.9	0.9	29	54	6	11
T19	33.3	1.95	8	8.8 ± 2.0	15	1.75	1.75	32	40	2	5
T28	40.7	2.1	10.1	8.8 ± 2.6	16.3	2.3	2.3	33	39	1	8
T43	55.9	2.9	13.8	8.8 ± 3.5	19.1	3.6	3.6	23	33	1	7
S26	18.6	1	4.6	10.7 ± 1.2	14.1	0.65	0.65	42	68	7	14
A05	17.20	0.9	4.3	14.5 ± 1.1	17.7	0.6	0.6	60	72	12	15



Third Angle
Projection

Dimensions are shown: mm

Specifications and dimensions subject to change

C&K

TERMINATIONS

CIRCUITRY

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

C&K Switches:

[LCS052P00ZC22AC](#) [LCS052P00WB24AC](#) [LCS052T13WC20AC](#) [LCS052P00ZB22AC](#) [LCS052P00WA22AC](#)
[LCS012T13WC22AY](#) [LCS052P00WC22AC](#) [LCS012T43WC22AY](#) [LCS052P00WB22AC](#) [LCS052T13WC22AY](#)
[LCS052T13WB20BY](#) [LCS052T43WC22AY](#)