




File: E209153

Mechanical Specifications (mm)

D:	23.0	± max
T:	9.5	± max
Lead Diameter	1.0	± nom
S:	7.8	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	9.22	± nom
C:	3.82	± nom

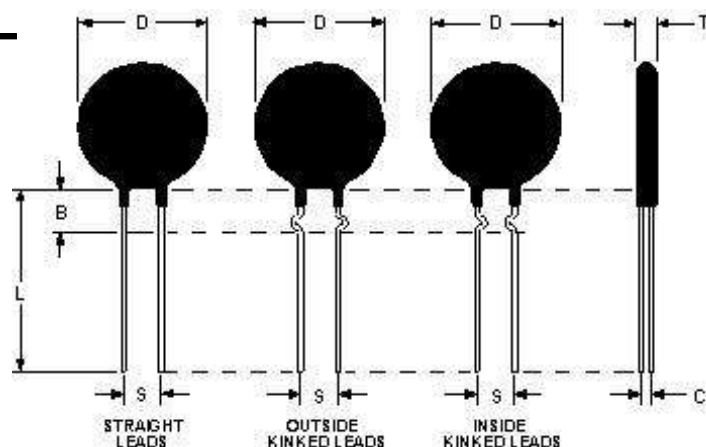

Electrical Specifications

Resistance:	10.0 Ω	± 25 %
Max Steady State Current upto 65°C:	8.00	A
Max Rec. Energy Rating:	200	J
Maximum Capacitance @ 120 VAC:	13,850	μ f
Maximum Capacitance @ 240 VAC:	3,473	μ f
Maximum Capacitance @ 440 VAC:	802	μ f
Maximum Capacitance @ 680 VAC:	400	μ f
Resistance @ 100% Max Current:	0.00	Ω
Resistance @ 50% Max Current:	0.18	Ω
Body Temperature at 100% Max Current:	194.00	°C
Dissipation Constant:	55.0	mw/°C
Thermal Time Constant:	112	Sec.
Material Type (for Beta and Curve):	G	

MS22 10008

Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[MS22 10008](#) [MS22 10008-B](#)