




File: E209153



ISO9001:2008 Certified

## Mechanical Specifications (mm)

D:	8.0	± .5
T:	4.0	± .5
Lead Diameter	0.5	± .1
S:	5.1	± Nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± 1.0
B:	6.30	± nom
C:	1.50	± .2

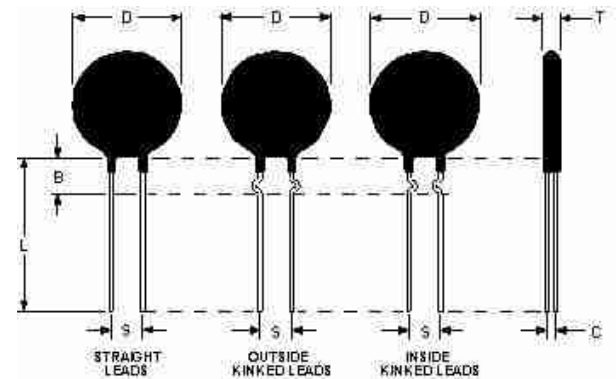

## Electrical Specifications

Resistance:	2.5	$\Omega$	± 25 %
Max Steady State Current upto 65°C:	3.00	A	
Max Rec. Energy Rating:	10	J	
Actual Failure Instantaneous Energy:	20	J	
Resistance @ 100% Max Current:	0.15	$\Omega$	
Resistance @ 50% Max Current:	0.35	$\Omega$	
Body Temperature at 100% Max Current:	75.00	°C	
Dissipation Constant:	9.0	mw/°C	
Thermal Time Constant:	25	Sec.	
Material Type (for Beta and Curve):	C		

### SL08 2R503

Date: 02/14/2012	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision:

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ametherm:](#)

[SL08 2R503](#)